

# Silicon Carbide (SiC) Module - EliteSiC, 3 mohm SiC M3 MOSFET, 1200 V, 2-PACK Half Bridge Topology, F2 Package with Si3N4 DBC

# NXH003P120M3F2PTNG

The NXH003P120M3F2PTNG is a power module containing 3 m $\Omega$  / 1200 V SiC MOSFET half-bridge and a thermistor with Si3N4 DBC in an F2 package.

### **Features**

- 3 m $\Omega$  / 1200 V M3S SiC MOSFET Half-Bridge
- Si3N4 DBC
- Thermistor
- Pre-Applied Thermal Interface Material (TIM)
- Press-Fit Pins
- These Devices are Pb-Free, Halide Free and are RoHS Compliant

### **Typical Applications**

- Solar Inverter
- Uninterruptible Power Supplies
- Electric Vehicle Charging Stations
- Industrial Power


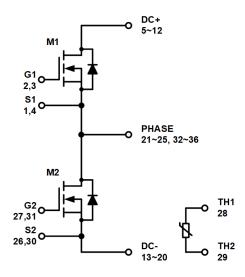


Figure 1. NXH003P120M3F2 Schematic Diagram

1

### **PACKAGE PICTURE**




PIM36 56.7x42.5 (PRESS FIT) CASE 180BY

### **MARKING DIAGRAM**

NXH003P120M3F2PTNG = Specific Device Code AT = Assembly & Test Site Code

YWW = Year and Work Week

### **PIN CONNECTIONS**

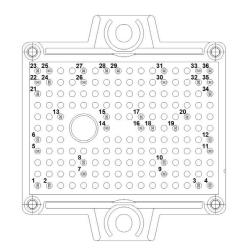

See Pin Function Description for pin names

### **ORDERING INFORMATION**

See detailed ordering and shipping information on page 4 of this data sheet.

# PIN FUNCTION DESCRIPTION

1         S1         Q1 Kelvin Emitter (High side switch)           2         G1         Q1 Gate (High side switch)           3         G1         Q1 Gate (High side switch)           4         S1         Q1 Kelvin Emitter (High side switch)           5         DC+         DC Positive Bus connection           6         DC+         DC Positive Bus connection           7         DC+         DC Positive Bus connection           8         DC+         DC Positive Bus connection           9         DC+         DC Positive Bus connection           10         DC+         DC Positive Bus connection           11         DC+         DC Positive Bus connection           12         DC+         DC Positive Bus connection           12         DC+         DC Positive Bus connection           14         DC-         DC Negative Bus connection           15         DC-         DC Negative Bus connection           16         DC-         DC Negative Bus connection           17         DC-         DC Negative Bus connection           18         DC-         DC Negative Bus connection           19         DC-         DC Negative Bus connection           20         DC- <td< th=""><th>Pin</th><th>Name</th><th>Description</th></td<>	Pin	Name	Description
3	1	S1	Q1 Kelvin Emitter (High side switch)
4         S1         Q1 Kelvin Emitter (High side switch)           5         DC+         DC Positive Bus connection           6         DC+         DC Positive Bus connection           7         DC+         DC Positive Bus connection           8         DC+         DC Positive Bus connection           9         DC-         DC Positive Bus connection           10         DC+         DC Positive Bus connection           11         DC+         DC Positive Bus connection           12         DC+         DC Positive Bus connection           13         DC*         DC Negative Bus connection           14         DC-         DC Negative Bus connection           15         DC-         DC Negative Bus connection           16         DC-         DC Negative Bus connection           17         DC-         DC Negative Bus connection           18         DC-         DC Negative Bus connection           19         DC-         DC Negative Bus connection           20         DC-         DC Negative Bus connection           21         PHASE         Center point of half bridge           22         PHASE         Center point of half bridge           23         PHASE	2	G1	Q1 Gate (High side switch)
5         DC+         DC Positive Bus connection           6         DC+         DC Positive Bus connection           7         DC-         DC Positive Bus connection           8         DC+         DC Positive Bus connection           9         DC+         DC Positive Bus connection           10         DC-         DC Positive Bus connection           11         DC+         DC Positive Bus connection           12         DC+         DC Positive Bus connection           13         DC*         DC Negative Bus connection           14         DC-         DC Negative Bus connection           15         DC-         DC Negative Bus connection           16         DC-         DC Negative Bus connection           17         DC-         DC Negative Bus connection           18         DC-         DC Negative Bus connection           19         DC-         DC Negative Bus connection           20         DC-         DC Negative Bus connection           21         PHASE         Center point of half bridge           22         PHASE         Center point of half bridge           23         PHASE         Center point of half bridge           24         PHASE	3	G1	Q1 Gate (High side switch)
6 DC+ DC Positive Bus connection 7 DC+ DC Positive Bus connection 8 DC+ DC Positive Bus connection 9 DC+ DC Positive Bus connection 10 DC+ DC Positive Bus connection 11 DC+ DC Positive Bus connection 11 DC+ DC Positive Bus connection 12 DC+ DC Positive Bus connection 13 DC+ DC Positive Bus connection 14 DC- DC Positive Bus connection 15 DC- DC Negative Bus connection 16 DC- DC Negative Bus connection 17 DC- DC Negative Bus connection 18 DC- DC Negative Bus connection 19 DC- DC Negative Bus connection 19 DC- DC Negative Bus connection 19 DC- DC Negative Bus connection 20 DC- DC Negative Bus connection 21 PHASE Center point of half bridge 22 PHASE Center point of half bridge 23 PHASE Center point of half bridge 24 PHASE Center point of half bridge 25 PHASE Center point of half bridge 26 S2 Q2 Kelvin Emitter (Low side switch) 27 G2 Q2 Gate (Low side switch) 30 S2 Q2 Kelvin Emitter (Low side switch) 31 G2 Q2 Gate (Low side switch) 32 PHASE Center point of half bridge 33 PHASE Center point of half bridge 34 PHASE Center point of half bridge	4	S1	Q1 Kelvin Emitter (High side switch)
7         DC+         DC Positive Bus connection           8         DC+         DC Positive Bus connection           9         DC+         DC Positive Bus connection           10         DC+         DC Positive Bus connection           11         DC+         DC Positive Bus connection           12         DC+         DC Positive Bus connection           13         DC*         DC Negative Bus connection           14         DC-         DC Negative Bus connection           15         DC-         DC Negative Bus connection           16         DC-         DC Negative Bus connection           17         DC-         DC Negative Bus connection           18         DC-         DC Negative Bus connection           19         DC-         DC Negative Bus connection           20         DC-         DC Negative Bus connection           21         PHASE         Center point of half bridge           22         PHASE         Center point of half bridge           23         PHASE         Center point of half bridge           24         PHASE         Center point of half bridge           25         PHASE         Center point of half bridge           26         S2	5	DC+	DC Positive Bus connection
8 DC+ DC Positive Bus connection 9 DC+ DC Positive Bus connection 10 DC+ DC Positive Bus connection 11 DC+ DC Positive Bus connection 11 DC+ DC Positive Bus connection 12 DC+ DC Positive Bus connection 13 DC+ DC Positive Bus connection 14 DC- DC Negative Bus connection 15 DC- DC Negative Bus connection 16 DC- DC Negative Bus connection 17 DC- DC Negative Bus connection 18 DC- DC Negative Bus connection 19 DC- DC Negative Bus connection 19 DC- DC Negative Bus connection 20 DC- DC Negative Bus connection 21 PHASE Center point of half bridge 22 PHASE Center point of half bridge 23 PHASE Center point of half bridge 24 PHASE Center point of half bridge 25 PHASE Center point of half bridge 26 S2 Q2 Kelvin Emitter (Low side switch) 27 G2 Q2 Gate (Low side switch) 31 G2 Q2 Gate (Low side switch) 32 PHASE Center point of half bridge 33 PHASE Center point of half bridge 34 PHASE Center point of half bridge	6	DC+	DC Positive Bus connection
9 DC+ DC Positive Bus connection 10 DC+ DC Positive Bus connection 11 DC+ DC Positive Bus connection 11 DC+ DC Positive Bus connection 12 DC+ DC Positive Bus connection 13 DC* DC Negative Bus connection 14 DC- DC Negative Bus connection 15 DC- DC Negative Bus connection 16 DC- DC Negative Bus connection 17 DC- DC Negative Bus connection 18 DC- DC Negative Bus connection 19 DC- DC Negative Bus connection 20 DC- DC Negative Bus connection 21 PHASE Center point of half bridge 22 PHASE Center point of half bridge 23 PHASE Center point of half bridge 24 PHASE Center point of half bridge 25 PHASE Center point of half bridge 26 S2 Q2 Kelvin Emitter (Low side switch) 27 G2 Q2 Gate (Low side switch) 30 S2 Q2 Kelvin Emitter (Low side switch) 31 G2 Q2 Gate (Low side switch) 32 PHASE Center point of half bridge 33 PHASE Center point of half bridge 34 PHASE Center point of half bridge	7	DC+	DC Positive Bus connection
10 DC+ DC Positive Bus connection  11 DC+ DC Positive Bus connection  12 DC+ DC Positive Bus connection  13 DC* DC Negative Bus connection  14 DC- DC Negative Bus connection  15 DC- DC Negative Bus connection  16 DC- DC Negative Bus connection  17 DC- DC Negative Bus connection  18 DC- DC Negative Bus connection  19 DC- DC Negative Bus connection  20 DC- DC Negative Bus connection  21 PHASE Center point of half bridge  22 PHASE Center point of half bridge  24 PHASE Center point of half bridge  25 PHASE Center point of half bridge  26 S2 Q2 Kelvin Emitter (Low side switch)  27 G2 Q2 Gate (Low side switch)  31 G2 Q2 Gate (Low side switch)  32 PHASE Center point of half bridge  33 PHASE Center point of half bridge  34 PHASE Center point of half bridge	8	DC+	DC Positive Bus connection
11 DC+ DC Positive Bus connection 12 DC+ DC Positive Bus connection 13 DC* DC Negative Bus connection 14 DC- DC Negative Bus connection 15 DC- DC Negative Bus connection 16 DC- DC Negative Bus connection 17 DC- DC Negative Bus connection 18 DC- DC Negative Bus connection 19 DC- DC Negative Bus connection 20 DC- DC Negative Bus connection 21 PHASE Center point of half bridge 22 PHASE Center point of half bridge 24 PHASE Center point of half bridge 25 PHASE Center point of half bridge 26 S2 Q2 Kelvin Emitter (Low side switch) 27 G2 Q2 Gate (Low side switch) 31 G2 Q2 Gate (Low side switch) 32 PHASE Center point of half bridge 33 PHASE Center point of nation 29 TH2 Thermistor Connection 1 29 TH2 Thermistor Connection 2 30 PHASE Center point of half bridge 31 PHASE Center point of half bridge 32 PHASE Center point of half bridge 33 PHASE Center point of half bridge	9	DC+	DC Positive Bus connection
12 DC+ DC Positive Bus connection  13 DC* DC Negative Bus connection  14 DC- DC Negative Bus connection  15 DC- DC Negative Bus connection  16 DC- DC Negative Bus connection  17 DC- DC Negative Bus connection  18 DC- DC Negative Bus connection  19 DC- DC Negative Bus connection  19 DC- DC Negative Bus connection  20 DC- DC Negative Bus connection  21 PHASE Center point of half bridge  22 PHASE Center point of half bridge  23 PHASE Center point of half bridge  24 PHASE Center point of half bridge  25 PHASE Center point of half bridge  26 S2 Q2 Kelvin Emitter (Low side switch)  27 G2 Q2 Gate (Low side switch)  30 S2 Q2 Kelvin Emitter (Low side switch)  31 G2 Q2 Gate (Low side switch)  32 PHASE Center point of half bridge  33 PHASE Center point of half bridge  34 PHASE Center point of half bridge  35 PHASE Center point of half bridge	10	DC+	DC Positive Bus connection
13 DC* DC Negative Bus connection  14 DC- DC Negative Bus connection  15 DC- DC Negative Bus connection  16 DC- DC Negative Bus connection  17 DC- DC Negative Bus connection  18 DC- DC Negative Bus connection  19 DC- DC Negative Bus connection  20 DC- DC Negative Bus connection  21 PHASE Center point of half bridge  22 PHASE Center point of half bridge  23 PHASE Center point of half bridge  24 PHASE Center point of half bridge  25 PHASE Center point of half bridge  26 S2 Q2 Kelvin Emitter (Low side switch)  27 G2 Q2 Gate (Low side switch)  30 S2 Q2 Kelvin Emitter (Low side switch)  31 G2 Q2 Gate (Low side switch)  32 PHASE Center point of half bridge  33 PHASE Center point of half bridge  34 PHASE Center point of half bridge  35 PHASE Center point of half bridge	11	DC+	DC Positive Bus connection
14 DC- DC Negative Bus connection 15 DC- DC Negative Bus connection 16 DC- DC Negative Bus connection 17 DC- DC Negative Bus connection 18 DC- DC Negative Bus connection 19 DC- DC Negative Bus connection 20 DC- DC Negative Bus connection 21 PHASE Center point of half bridge 22 PHASE Center point of half bridge 23 PHASE Center point of half bridge 24 PHASE Center point of half bridge 25 PHASE Center point of half bridge 26 S2 Q2 Kelvin Emitter (Low side switch) 27 G2 Q2 Gate (Low side switch) 30 S2 Q2 Kelvin Emitter (Low side switch) 31 G2 Q2 Gate (Low side switch) 32 PHASE Center point of half bridge 33 PHASE Center formation 1 34 PHASE Center point of half bridge	12	DC+	DC Positive Bus connection
15 DC- DC Negative Bus connection  16 DC- DC Negative Bus connection  17 DC- DC Negative Bus connection  18 DC- DC Negative Bus connection  19 DC- DC Negative Bus connection  20 DC- DC Negative Bus connection  21 PHASE Center point of half bridge  22 PHASE Center point of half bridge  23 PHASE Center point of half bridge  24 PHASE Center point of half bridge  25 PHASE Center point of half bridge  26 S2 Q2 Kelvin Emitter (Low side switch)  27 G2 Q2 Gate (Low side switch)  28 TH1 Thermistor Connection 1  29 TH2 Thermistor Connection 2  30 S2 Q2 Kelvin Emitter (Low side switch)  31 G2 Q2 Gate (Low side switch)  32 PHASE Center point of half bridge  33 PHASE Center point of half bridge  34 PHASE Center point of half bridge	13	DC*	DC Negative Bus connection
16 DC- DC Negative Bus connection  17 DC- DC Negative Bus connection  18 DC- DC Negative Bus connection  19 DC- DC Negative Bus connection  20 DC- DC Negative Bus connection  21 PHASE Center point of half bridge  22 PHASE Center point of half bridge  23 PHASE Center point of half bridge  24 PHASE Center point of half bridge  25 PHASE Center point of half bridge  26 S2 Q2 Kelvin Emitter (Low side switch)  27 G2 Q2 Gate (Low side switch)  28 TH1 Thermistor Connection 1  29 TH2 Thermistor Connection 2  30 S2 Q2 Kelvin Emitter (Low side switch)  31 G2 Q2 Gate (Low side switch)  32 PHASE Center point of half bridge  33 PHASE Center point of half bridge  34 PHASE Center point of half bridge  35 PHASE Center point of half bridge	14	DC-	DC Negative Bus connection
17 DC- DC Negative Bus connection  18 DC- DC Negative Bus connection  19 DC- DC Negative Bus connection  20 DC- DC Negative Bus connection  21 PHASE Center point of half bridge  22 PHASE Center point of half bridge  23 PHASE Center point of half bridge  24 PHASE Center point of half bridge  25 PHASE Center point of half bridge  26 S2 Q2 Kelvin Emitter (Low side switch)  27 G2 Q2 Gate (Low side switch)  28 TH1 Thermistor Connection 1  29 TH2 Thermistor Connection 2  30 S2 Q2 Kelvin Emitter (Low side switch)  31 G2 Q2 Gate (Low side switch)  32 PHASE Center point of half bridge  33 PHASE Center point of half bridge  34 PHASE Center point of half bridge  35 PHASE Center point of half bridge  36 PHASE Center point of half bridge	15	DC-	DC Negative Bus connection
18 DC- DC Negative Bus connection  19 DC- DC Negative Bus connection  20 DC- DC Negative Bus connection  21 PHASE Center point of half bridge  22 PHASE Center point of half bridge  23 PHASE Center point of half bridge  24 PHASE Center point of half bridge  25 PHASE Center point of half bridge  26 S2 Q2 Kelvin Emitter (Low side switch)  27 G2 Q2 Gate (Low side switch)  28 TH1 Thermistor Connection 1  29 TH2 Thermistor Connection 2  30 S2 Q2 Kelvin Emitter (Low side switch)  31 G2 Q2 Gate (Low side switch)  32 PHASE Center point of half bridge  33 PHASE Center point of half bridge  34 PHASE Center point of half bridge  35 PHASE Center point of half bridge  Center point of half bridge  Center point of half bridge	16	DC-	DC Negative Bus connection
19 DC- DC Negative Bus connection 20 DC- DC Negative Bus connection 21 PHASE Center point of half bridge 22 PHASE Center point of half bridge 23 PHASE Center point of half bridge 24 PHASE Center point of half bridge 25 PHASE Center point of half bridge 26 S2 Q2 Kelvin Emitter (Low side switch) 27 G2 Q2 Gate (Low side switch) 28 TH1 Thermistor Connection 1 29 TH2 Thermistor Connection 2 30 S2 Q2 Kelvin Emitter (Low side switch) 31 G2 Q2 Gate (Low side switch) 32 PHASE Center point of half bridge 33 PHASE Center point of half bridge 34 PHASE Center point of half bridge 35 PHASE Center point of half bridge	17	DC-	DC Negative Bus connection
DC- DC Negative Bus connection  21 PHASE Center point of half bridge  22 PHASE Center point of half bridge  23 PHASE Center point of half bridge  24 PHASE Center point of half bridge  25 PHASE Center point of half bridge  26 S2 Q2 Kelvin Emitter (Low side switch)  27 G2 Q2 Gate (Low side switch)  28 TH1 Thermistor Connection 1  29 TH2 Thermistor Connection 2  30 S2 Q2 Kelvin Emitter (Low side switch)  31 G2 Q2 Gate (Low side switch)  32 PHASE Center point of half bridge  33 PHASE Center point of half bridge  34 PHASE Center point of half bridge  35 PHASE Center point of half bridge	18	DC-	DC Negative Bus connection
PHASE Center point of half bridge  21 PHASE Center point of half bridge  23 PHASE Center point of half bridge  24 PHASE Center point of half bridge  25 PHASE Center point of half bridge  26 S2 Q2 Kelvin Emitter (Low side switch)  27 G2 Q2 Gate (Low side switch)  28 TH1 Thermistor Connection 1  29 TH2 Thermistor Connection 2  30 S2 Q2 Kelvin Emitter (Low side switch)  31 G2 Q2 Gate (Low side switch)  32 PHASE Center point of half bridge  33 PHASE Center point of half bridge  34 PHASE Center point of half bridge  35 PHASE Center point of half bridge	19	DC-	DC Negative Bus connection
PHASE Center point of half bridge  21 PHASE Center point of half bridge  22 PHASE Center point of half bridge  23 PHASE Center point of half bridge  24 PHASE Center point of half bridge  25 PHASE Center point of half bridge  26 S2 Q2 Kelvin Emitter (Low side switch)  27 G2 Q2 Gate (Low side switch)  28 TH1 Thermistor Connection 1  29 TH2 Thermistor Connection 2  30 S2 Q2 Kelvin Emitter (Low side switch)  31 G2 Q2 Gate (Low side switch)  32 PHASE Center point of half bridge  33 PHASE Center point of half bridge  34 PHASE Center point of half bridge  35 PHASE Center point of half bridge	20	DC-	DC Negative Bus connection
PHASE Center point of half bridge  24 PHASE Center point of half bridge  25 PHASE Center point of half bridge  26 S2 Q2 Kelvin Emitter (Low side switch)  27 G2 Q2 Gate (Low side switch)  28 TH1 Thermistor Connection 1  29 TH2 Thermistor Connection 2  30 S2 Q2 Kelvin Emitter (Low side switch)  31 G2 Q2 Gate (Low side switch)  32 PHASE Center point of half bridge  33 PHASE Center point of half bridge  34 PHASE Center point of half bridge  35 PHASE Center point of half bridge	21	PHASE	Center point of half bridge
PHASE Center point of half bridge  25 PHASE Center point of half bridge  26 S2 Q2 Kelvin Emitter (Low side switch)  27 G2 Q2 Gate (Low side switch)  28 TH1 Thermistor Connection 1  29 TH2 Thermistor Connection 2  30 S2 Q2 Kelvin Emitter (Low side switch)  31 G2 Q2 Gate (Low side switch)  32 PHASE Center point of half bridge  33 PHASE Center point of half bridge  34 PHASE Center point of half bridge  35 PHASE Center point of half bridge	22	PHASE	Center point of half bridge
25 PHASE Center point of half bridge  26 S2 Q2 Kelvin Emitter (Low side switch)  27 G2 Q2 Gate (Low side switch)  28 TH1 Thermistor Connection 1  29 TH2 Thermistor Connection 2  30 S2 Q2 Kelvin Emitter (Low side switch)  31 G2 Q2 Gate (Low side switch)  32 PHASE Center point of half bridge  34 PHASE Center point of half bridge  35 PHASE Center point of half bridge  Center point of half bridge	23	PHASE	Center point of half bridge
S2 Q2 Kelvin Emitter (Low side switch)  27 G2 Q2 Gate (Low side switch)  28 TH1 Thermistor Connection 1  29 TH2 Thermistor Connection 2  30 S2 Q2 Kelvin Emitter (Low side switch)  31 G2 Q2 Gate (Low side switch)  32 PHASE Center point of half bridge  33 PHASE Center point of half bridge  34 PHASE Center point of half bridge  35 PHASE Center point of half bridge	24	PHASE	Center point of half bridge
G2 Q2 Gate (Low side switch)  TH1 Thermistor Connection 1  Thermistor Connection 2  G2 Q2 Kelvin Emitter (Low side switch)  G2 Q2 Gate (Low side switch)  PHASE Center point of half bridge  THASE Center point of half bridge	25	PHASE	Center point of half bridge
TH1 Thermistor Connection 1  Thermistor Connection 2  TH2 Thermistor Connection 2  Q2 Kelvin Emitter (Low side switch)  G2 Q2 Gate (Low side switch)  PHASE Center point of half bridge  PHASE Center point of half bridge  TH1 Thermistor Connection 1  Thermistor Connection 2  Thermistor Connection	26	S2	Q2 Kelvin Emitter (Low side switch)
TH2 Thermistor Connection 2  30 S2 Q2 Kelvin Emitter (Low side switch)  31 G2 Q2 Gate (Low side switch)  32 PHASE Center point of half bridge  33 PHASE Center point of half bridge  34 PHASE Center point of half bridge  35 PHASE Center point of half bridge	27	G2	Q2 Gate (Low side switch)
30 S2 Q2 Kelvin Emitter (Low side switch) 31 G2 Q2 Gate (Low side switch) 32 PHASE Center point of half bridge 33 PHASE Center point of half bridge 34 PHASE Center point of half bridge 35 PHASE Center point of half bridge	28	TH1	Thermistor Connection 1
31 G2 Q2 Gate (Low side switch)  32 PHASE Center point of half bridge  33 PHASE Center point of half bridge  34 PHASE Center point of half bridge  35 PHASE Center point of half bridge	29	TH2	Thermistor Connection 2
32 PHASE Center point of half bridge 33 PHASE Center point of half bridge 34 PHASE Center point of half bridge 35 PHASE Center point of half bridge	30	S2	Q2 Kelvin Emitter (Low side switch)
33 PHASE Center point of half bridge  34 PHASE Center point of half bridge  35 PHASE Center point of half bridge	31	G2	Q2 Gate (Low side switch)
34 PHASE Center point of half bridge 35 PHASE Center point of half bridge	32	PHASE	Center point of half bridge
35 PHASE Center point of half bridge	33	PHASE	Center point of half bridge
	34	PHASE	Center point of half bridge
36 PHASE Center point of half bridge	35	PHASE	Center point of half bridge
	36	PHASE	Center point of half bridge

### **MAXIMUM RATINGS**

Rating	Symbol	Value	Unit
SIC MOSFET			•
Drain-Source Voltage	V <sub>DSS</sub>	1200	V
Gate-Source Voltage	V <sub>GS</sub>	+22/-10	V
Continuous Drain Current @ T <sub>c</sub> = 80 °C (T <sub>J</sub> = 175 °C)	I <sub>D</sub>	435	А
Pulsed Drain Current (T <sub>J</sub> = 175 °C)	I <sub>Dpulse</sub>	870	А
Maximum Power Dissipation @ T <sub>c</sub> = 80 °C (T <sub>J</sub> = 175 °C)	P <sub>tot</sub>	1482	W
Minimum Operating Junction Temperature	T <sub>JMIN</sub>	-40	°C
Maximum Operating Junction Temperature	T <sub>JMAX</sub>	175	°C
THERMAL PROPERTIES			
Storage Temperature Range	T <sub>stg</sub>	-40 to 150	°C
TIM Layer Thickness	T <sub>TIM</sub>	160 ±20	μm
INSULATION PROPERTIES			
Isolation Test Voltage, t = 1 s, 60 Hz	V <sub>is</sub>	4800	$V_{RMS}$
Creepage Distance		12.7	mm
СТІ		600	
Substrate Ceramic Material		Si3N4	
Substrate Ceramic Material Thickness		0.38	mm
Substrate Warpage (Note 2)	W	Max 0.18	mm

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

### **RECOMMENDED OPERATING RANGES**

Rating	Symbol	Min	Max	Unit
Module Operating Junction Temperature	$T_J$	-40	150	°C

Functional operation above the stresses listed in the Recommended Operating Ranges is not implied. Extended exposure to stresses beyond the Recommended Operating Ranges limits may affect device reliability.

# **ELECTRICAL CHARACTERISTICS** (T<sub>J</sub> = 25 °C unless otherwise noted)

Parameter	Symbol	Test Conditions	Min	Тур	Max	Unit
SIC MOSFET CHARACTERISTICS	SIC MOSFET CHARACTERISTICS					
Zero Gate Voltage Drain Current	I <sub>DSS</sub>	V <sub>GS</sub> = 0 V, V <sub>DS</sub> = 1200 V	-	-	300	μΑ
Drain-Source On Resistance	R <sub>DS(ON)</sub>	V <sub>GS</sub> = 18 V, I <sub>D</sub> = 200 A, T <sub>J</sub> = 25 °C	_	3.19	5	mΩ
		V <sub>GS</sub> = 18 V, I <sub>D</sub> = 200 A, T <sub>J</sub> = 125 °C	_	5.25	_	1
		V <sub>GS</sub> = 18 V, I <sub>D</sub> = 200 A, T <sub>J</sub> = 150 °C	_	5.88	_	1
Gate-Source Threshold Voltage	V <sub>GS(TH)</sub>	$V_{GS} = V_{DS}$ , $I_D = 160 \text{ mA}$	1.8	2.4	4.4	V
Gate Leakage Current	I <sub>GSS</sub>	$V_{GS} = -10 \text{ V} / 20 \text{ V}, V_{DS} = 0 \text{ V}$	-800	-	800	nA
Gate-Resistance	$R_{G}$	f = 1 MHz	-	0.1875	-	Ω
Input Capacitance	C <sub>ISS</sub>	V <sub>DS</sub> = 800 V, V <sub>GS</sub> = 0 V, f = 100 kHz	_	20889	-	pF
Reverse Transfer Capacitance	C <sub>RSS</sub>	]	_	90	_	
Output Capacitance	C <sub>OSS</sub>		_	1225	-	

<sup>1.</sup> Refer to ELECTRICAL CHĂRACTERISTICS, RECOMMENDED OPERATING RANGES and/or APPLICATION INFORMATION for Safe Operating parameters.

<sup>2.</sup> Height difference between horizontal plane and substrate copper bottom.

# **ELECTRICAL CHARACTERISTICS** (T<sub>J</sub> = 25 °C unless otherwise noted) (continued)

Parameter	Symbol	Test Conditions	Min	Тур	Max	Unit
SIC MOSFET CHARACTERISTICS	1					1
Total Gate Charge	Q <sub>G(TOTAL)</sub>	$V_{DS} = 800 \text{ V}, V_{GS} = -5/20 \text{ V},$	_	1195	-	nC
Gate-Source Charge	Q <sub>GS</sub>	I <sub>D</sub> = 200 A	_	232	-	nC
Gate-Drain Charge	Q <sub>GD</sub>	1	_	210	-	nC
Turn-on Delay Time	t <sub>d(on)</sub>	T <sub>J</sub> = 25 °C	_	49	_	ns
Rise Time	t <sub>r</sub>	$V_{DS}$ = 600 V, $I_D$ = 200 A $V_{GS}$ = -5 V / 18 V, $R_G$ = 1 Ω	_	17	-	
Turn-off Delay Time	t <sub>d(off)</sub>	1 "	_	144	-	1
Fall Time	t <sub>f</sub>	1	_	16	-	1
Turn-on Switching Loss per Pulse	E <sub>ON</sub>	1	_	1.79	-	mJ
Turn-off Switching Loss per Pulse	E <sub>OFF</sub>	]	-	1.13	_	
Turn-on Delay Time	t <sub>d(on)</sub>	T <sub>J</sub> = 150 °C	_	48	-	ns
Rise Time	t <sub>r</sub>	$V_{DS} = 600 \text{ V}, I_D = 200 \text{ A}$ $V_{GS} = -5 \text{ V} / 18 \text{ V}, R_G = 1 \Omega$	-	15	_	1
Turn-off Delay Time	t <sub>d(off)</sub>	]	-	154	_	1
Fall Time	t <sub>f</sub>	]	-	15	_	1
Turn-on Switching Loss per Pulse	E <sub>ON</sub>	]	-	1.94	_	mJ
Turn off Switching Loss per Pulse	E <sub>OFF</sub>	]	-	1.12	_	1
Diode Forward Voltage	$V_{SD}$	I <sub>D</sub> = 200 A, T <sub>J</sub> = 25 °C	_	4.8	7.5	V
		I <sub>D</sub> = 200 A, T <sub>J</sub> = 125 °C	_	4.5	_	1
		I <sub>D</sub> = 200 A, T <sub>J</sub> = 150 °C	_	4.4	_	1
Thermal Resistance - Chip-to-Case	R <sub>thJC</sub>	M1, M2	_	0.0641	-	°C/W
Thermal Resistance – Chip-to-Heatsink	R <sub>thJH</sub>	Thermal grease, Thickness = 2 Mil +2%, A = 2.8 W/mK	-	0.1605	-	°C/W
THERMISTOR CHARACTERISTICS	•					-
Nominal Resistance	R <sub>25</sub>	T <sub>NTC</sub> = 25 °C	_	5	_	kΩ
	R <sub>100</sub>	T <sub>NTC</sub> = 100 °C	_	493	_	Ω
	R <sub>150</sub>	T <sub>NTC</sub> = 150 °C	_	159.5	-	Ω
Deviation of R <sub>100</sub>	ΔR/R	T <sub>NTC</sub> = 100 °C	-5	-	5	%
Power Dissipation – Recommended limit	P <sub>D</sub>	0.15 mA, non-self-heating effect	-	0.1	-	mW
Power Dissipation – Absolute maximum	P <sub>D</sub>	5 mA	-	34.2	-	mW
Power Dissipation Constant			_	1.4	-	mW/K
B-value		B (25/50), tolerance ±2%	_	3375	-	K
B-value		B (25/100), tolerance ±2%	-	3436	-	K

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

# **ORDERING INFORMATION**

Orderable Part Number	Marking	Package	Shipping
NXH003P120M3F2PTNG	NXH003P120M3F2PTNG	F2HALFBR: Case 180BY Press-fit Pins with pre-applied thermal interface material (TIM) (Pb-Free / Halide Free)	20 Units / Blister Tray

### TYPICAL CHARACTERISTIC

(M1/M2 SiC MOSFET CHARACTERISTIC)

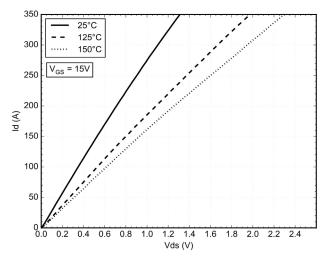


Figure 2. MOSFET Typical Output Characteristic

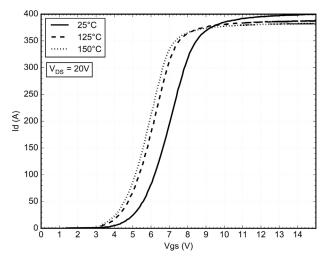


Figure 4. MOSFET Typical Transfer Characteristic

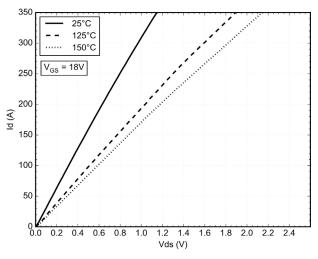


Figure 3. MOSFET Typical Output Characteristic

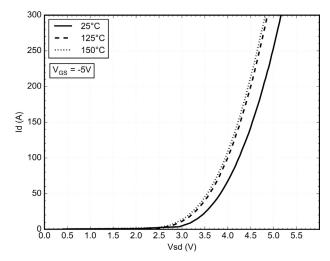


Figure 5. Body Diode Forward Characteristic

# **TYPICAL CHARACTERISTIC**

(M1/M2 SiC MOSFET CHARACTERISTIC)

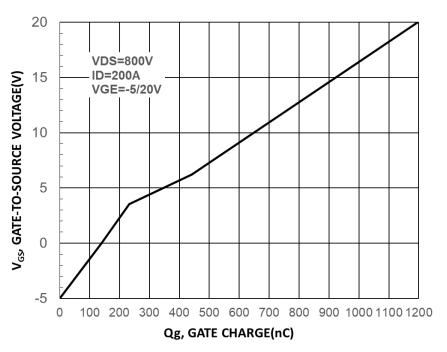


Figure 6. Gate-to-Source Voltage vs. Total Charge

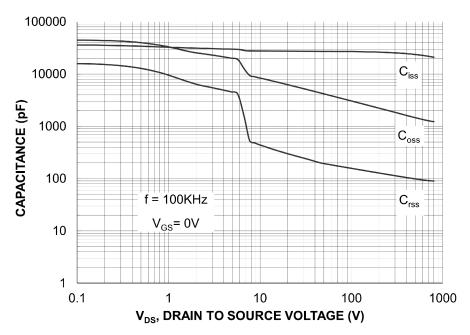


Figure 7. Capacitance vs. Drain-to-Source Voltage

### **TYPICAL CHARACTERISTIC**

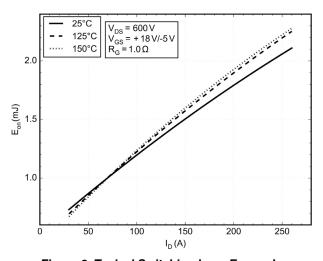


Figure 8. Typical Switching Loss  $E_{on}$  vs.  $I_{D}$ 


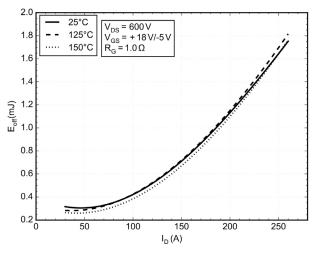


Figure 10. Typical Switching Loss  $E_{\text{off}}$  vs.  $I_{\text{D}}$ 

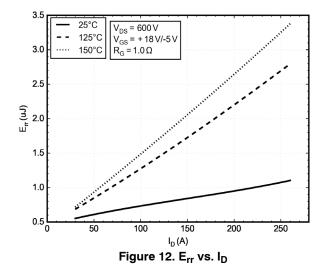

4.0

- 25°C

- 125°C

- 125°C  $V_{DS} = 600 V_{V_{GS}} + 18 V/-5 V_{DS} = 150 A$ 3.0

2.0

1.5

1.0

0 1 2 3 4 5  $R_{G}(\Omega)$ 

Figure 9. Typical Switching Loss E<sub>on</sub> vs. R<sub>G</sub>

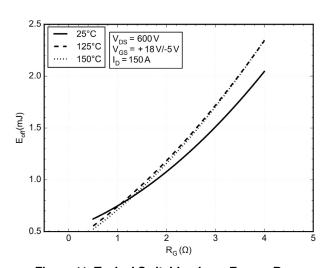


Figure 11. Typical Switching Loss  $E_{\text{off}}$  vs.  $R_{\text{G}}$ 

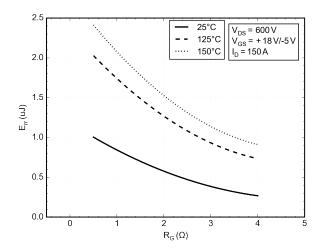


Figure 13.  $E_{rr}$  vs.  $R_{G}$ 

### **TYPICAL CHARACTERISTIC**

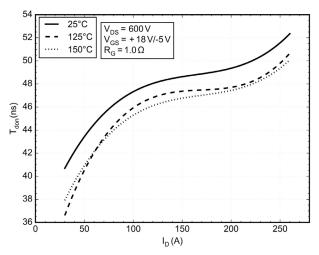


Figure 14. Typical Switching Loss T<sub>don</sub> vs. I<sub>D</sub>

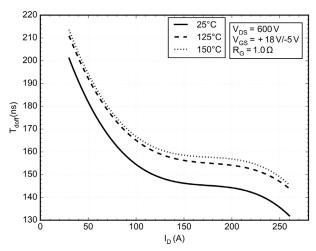


Figure 16. Typical Switching Loss  $T_{doff}$  vs.  $I_D$ 

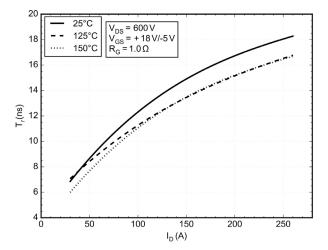


Figure 18. Typical Switching Loss  $T_r$  vs.  $I_D$ 

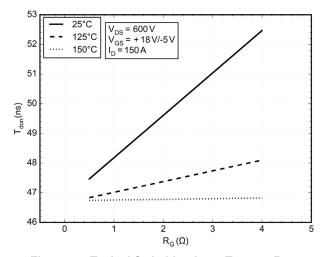


Figure 15. Typical Switching Loss T<sub>don</sub> vs. R<sub>G</sub>

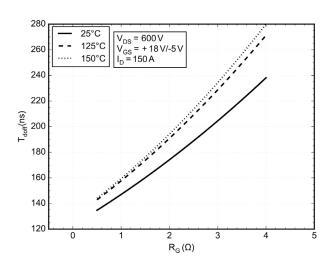


Figure 17. Typical Switching Loss  $T_{doff}$  vs.  $R_{G}$ 

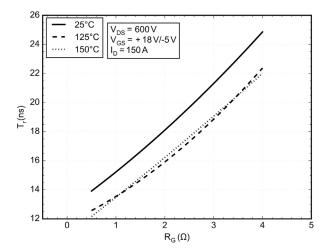


Figure 19. Typical Switching Loss  $T_r$  vs.  $R_G$ 

### TYPICAL CHARACTERISTIC

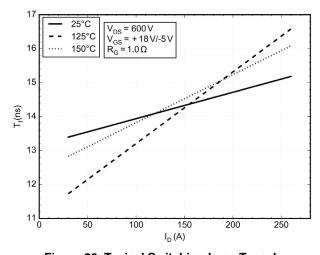


Figure 20. Typical Switching Loss  $T_{f}$  vs.  $I_{D}$ 

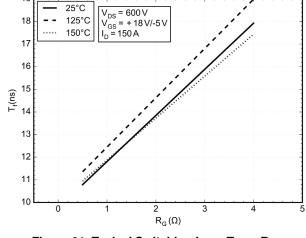


Figure 21. Typical Switching Loss Tf vs. RG

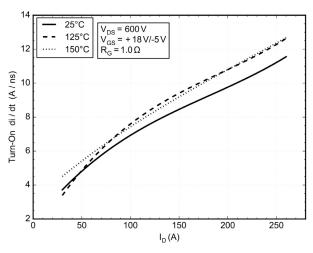


Figure 22. di/dt ON vs. I<sub>D</sub>

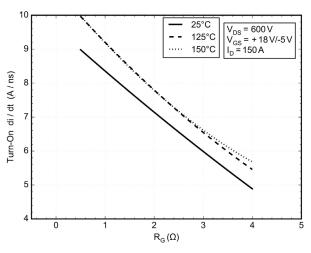


Figure 23. di/dt ON vs. R<sub>G</sub>

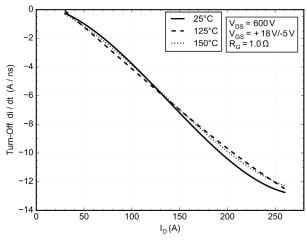


Figure 24. di/dt OFF vs. I<sub>D</sub>

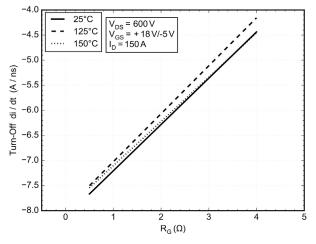


Figure 25. di/dt OFF vs. R<sub>G</sub>

### TYPICAL CHARACTERISTIC

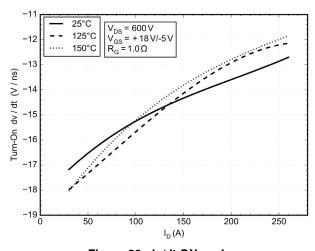


Figure 26. dv/dt ON vs.  $I_{D}$ 

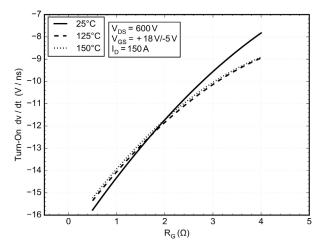


Figure 27. dv/dt ON vs. R<sub>G</sub>

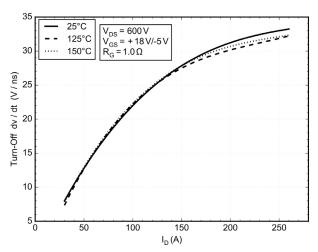


Figure 28. dv/dt OFF vs. I<sub>D</sub>

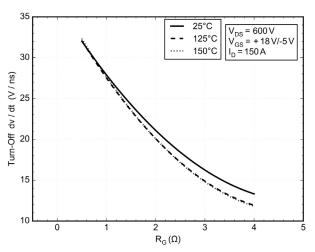


Figure 29. dv/dt OFF vs. R<sub>G</sub>

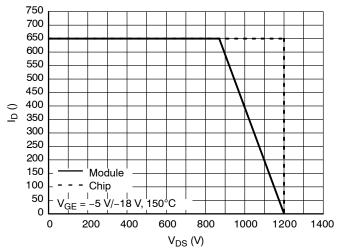


Figure 30. I<sub>D</sub> vs. V<sub>DS</sub>

# **TYPICAL CHARACTERISTIC**

(M1/M1 SiC MOSFET CHARACTERISTIC)

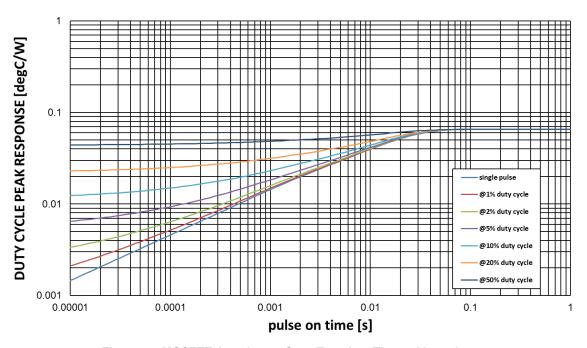


Figure 31. MOSFET Junction-to-Case Transient Thermal Impedance

# **FOSTER NETWORKS - M1, M2**

Foster	M1		M2	
Element #	Rth (K/W)	Cth (Ws/K)	Rth (K/W)	Cth (Ws/K)
1	0.001954903	0.006320060	0.002108724	0.007173619
2	0.001774431	0.052561285	0.001674965	0.065286128
3	0.008518089	0.083667598	0.008103839	0.093513060
4	0.004782129	0.475971634	0.005782362	0.432951421
5	0.047293860	0.316094909	0.049861821	0.347078551

### **CAUER NETWORKS - M1, M2**

Cauer	M1		M2		
Element #	Rth (K/W)	Cth (Ws/K)	Rth (K/W)	Cth (Ws/K)	
1	0.002902720	0.005142224	0.003106026	0.005861615	
2	0.005574283	0.027053480	0.005966663	0.031491586	
3	0.012888434	0.041274318	0.012576945	0.044061233	
4	0.022425186	0.197068008	0.021927720	0.198635336	
5	0.020532788	0.257185833	0.023954356	0.274582811	



### PIM36 56.70x42.50x12.00 CASE 180BY ISSUE E **DATE 20 DEC 2023** NOTES: 1. CONTROLLING DIMENSION: MILLIMETERS 2. PIN POSITION TOLERANCE IS ± 0.4mm PACKAGE MARKING LOCATION 3. PRESS FIT PIN MILLIMETERS NOM. MAX. DIM MIN. 11.65 12.35 12.00 Α1 16.10 16.50 16.90 A2 0.00 0.35 0.60 Ė2 А3 13.35 12.95 13.75 1.15 1.25 b 1.20 b1 0.59 0.64 0.69 D 56.40 56.70 57.00 D1 4.40 4.50 4.60 D2 50.85 51.00 51.15 47.70 48.00 48.30 42.35 42.50 E1 42.65 ØΡ E2 52.90 53.00 53.10 **E**3 62.30 62.80 63.30 SIDE VIEW TOP VIEW E4 4.90 5.00 5.10 Р 2.20 2.30 2.40 25.5 24.0 24.0 20.8 20.8 11.2 **END VIEW** DBC EXPOSAL **GENERIC MARKING DIAGRAM\* ATYYWW** Ø0.94~1.09 PLATED THRU HOLE FRONTSIDE MARKING 2D RECOMMENDED CODE **MOUNTING PATTERN**

DOCUMENT NUMBER:	98AON19725H	Electronic versions are uncontrolled except when accessed directly from the Document Reportant Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.	
DESCRIPTION:	PIM36 56.70x42.50x12.00		PAGE 1 OF 1

may not follow the Generic Marking.

\*This information is generic. Please refer to device data

sheet for actual part marking. Pb-Free indicator, "G" or

microdot " • ", may or may not be present. Some products

onsemi and ONSEMI are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

BACKSIDE MARKING

YYWW = Year and Work Week Code

= Assembly & Test Site Code

XXXXX = Specific Device Code

onsemi, ONSEMI., and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at <a href="www.onsemi.com/site/pdf/Patent-Marking.pdf">www.onsemi.com/site/pdf/Patent-Marking.pdf</a>. onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems. or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

### ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:

 $\textbf{Technical Library:} \ \underline{www.onsemi.com/design/resources/technical-documentation}$ 

onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at

www.onsemi.com/support/sales