

Circuit Description

The circuit consists of a full-wave bridge rectifier (D1–D4), a threshold detection and switching circuit (D5–D6, Q1–Q3, and M1), two LED strings (LED1–LED3 and LED4–LED6), and two ON Semiconductor Constant Current Regulators (CCR1 and CCR2).

Circuit Operation

The bridge rectifies the 60 Hz, 120 V_{rms} input providing a 120 Hz half-sin waveform with a peak voltage of 170 V. The bridge output is referenced from the cathodes of D3 and D4 to the anodes of D1 and D2. The bridge output voltage is applied across R1 and R2 creating a voltage divider. The voltage at the junction of R1 and R2 is used to turn on Q1, triggering the switching between the parallel and series configurations. The voltage at which the circuit switches is referenced as V_{SWITCH}.

It is recommended that V_{SWITCH} be set just above the forward voltage of the two LED strings in series configuration, which is about 110 V in the provided circuit. Referring to Figure 1, V_{SWITCH} depends on R1, R2, and the V_{BE(sat)} of Q1. This relationship is expressed by the following equation:

$$V_{\text{SWITCH}} = V_{\text{BE(sat)}} \cdot \left(\frac{R1 + R2}{R2} \right)$$

Q1 is an ON Semiconductor MMBT3904L. A V_{BE(sat)} value of Q1 at 25°C is 0.68 V. With R1 = 1 MΩ and R2 = 6.2 kΩ, V_{SWITCH} is about 110 V.

When the bridge output voltage is less than 110 V, the two LED strings are in parallel. As shown in Table 2, Q1 & Q2 are off and M1 & Q3 are on. D5 and D6 do not conduct because they are reverse-biased. Z1 protects the gate of M1. When the bridge output voltage is greater than 110 V, the two LED strings are in series. Q1 & Q2 are on and M1 & Q3 are off. D5 and D6 conduct and join the two LED strings.

The circuit achieves an efficiency of 72%. Improved efficiency of 94% is achievable by inserting an additional LED in each string. However, with four LEDs per string, power factor falls from 0.97 to 0.90, THD rises from 24% to 47%, and dimming performance is degraded.

Table 2. STATES OF THE TRANSISTORS AND CONNECTING DIODES IN PARALLEL AND SERIAL OPERATION

	LED Configuration	
	Parallel	Series
D5	Reverse-Biased	Forward-Biased
D6	Reverse-Biased	Forward-Biased
M1	On	Off
Q1	Off	On
Q2	Off	On
Q3	On	Off

Circuit Data

Table 3. ELECTRICAL CHARACTERISTICS FOR THE CIRCUIT SHOWN IN FIGURE 1

Criteria	110 V _{AC}	120 V _{AC}	130 V _{AC}
	Result	Result	Result
Input Frequency (Hz)	60	60	60
Power (W)	6.11	6.72	7.28
Input Current (mA _{rms})	57.1	57.4	57.3
Power Factor	0.970	0.972	0.974
THD (% , Input I _{rms})	25.0	24.1	23.3
Efficiency (%)	75.6	72.4	69.0

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

Dimmers Tested

Table 4. THE CIRCUIT WAS FULLY FUNCTIONAL WITH EACH DIMMER TESTED

Dimmer
Cooper Aspire 9530
GE DI 61
Kuei Lin AC 110 V, 500 W
Leviton 6615–POW
Leviton 6633–PLW
Leviton 6674 Universal
Leviton Illumatech IPI06
Leviton OC58L1
Lightolier CT600WC
Lutron CT–603PGH
Lutron CTCL–153PD
Lutron MAW–600H
Lutron TG–10PR
Lutron TG–600P–AC
Lutron TG–600PH
Lutron S–600PR
Pass & Seymour D703PLAV
Pass & Seymour DCL453PTC
Pass & Seymour LS603PLAV
Pass & Seymour LSLV603PWV
Pass & Seymour WS703PW
SCT YM2508A
WattStopper DCD267 Universal

Representational Circuit Diagrams

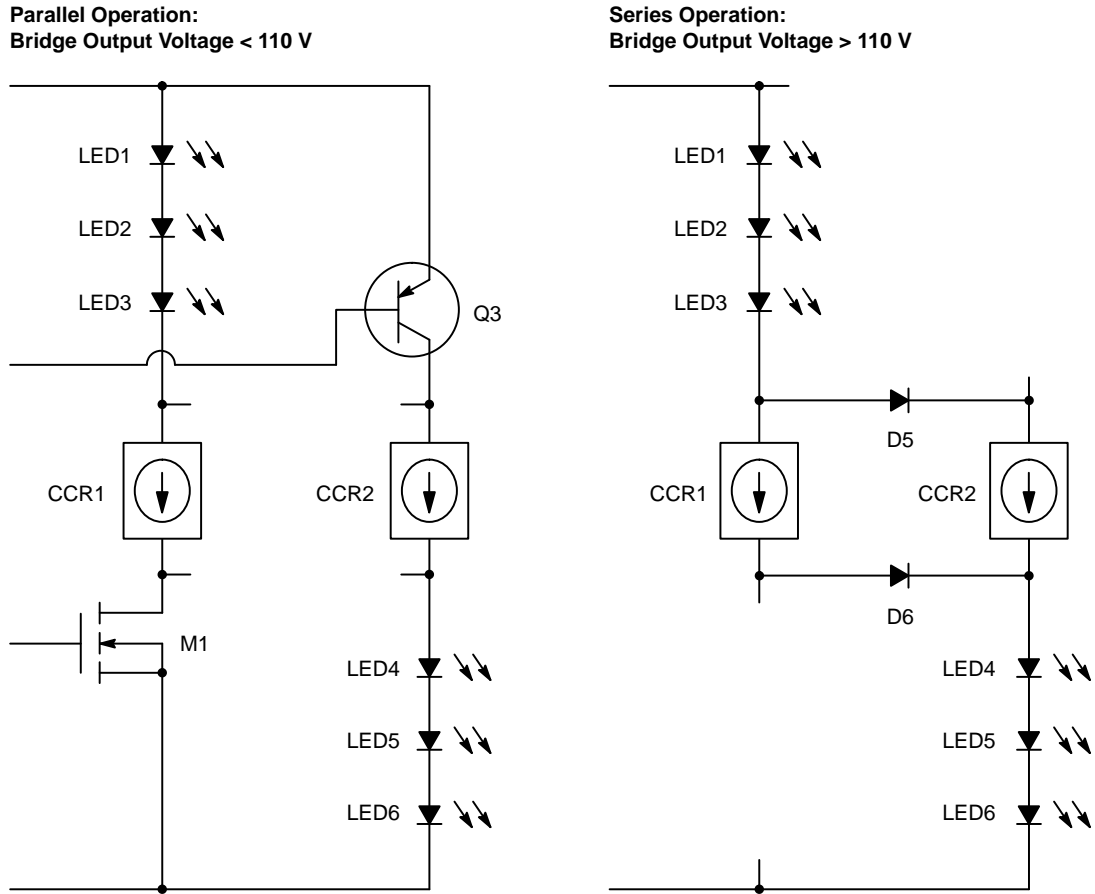


Figure 2. The Circuit Switches between Parallel and Series LED Configurations as the Bridge Output Voltage Passes 110 Volts. Total Input Current is the Same in both Configurations.

Waveforms

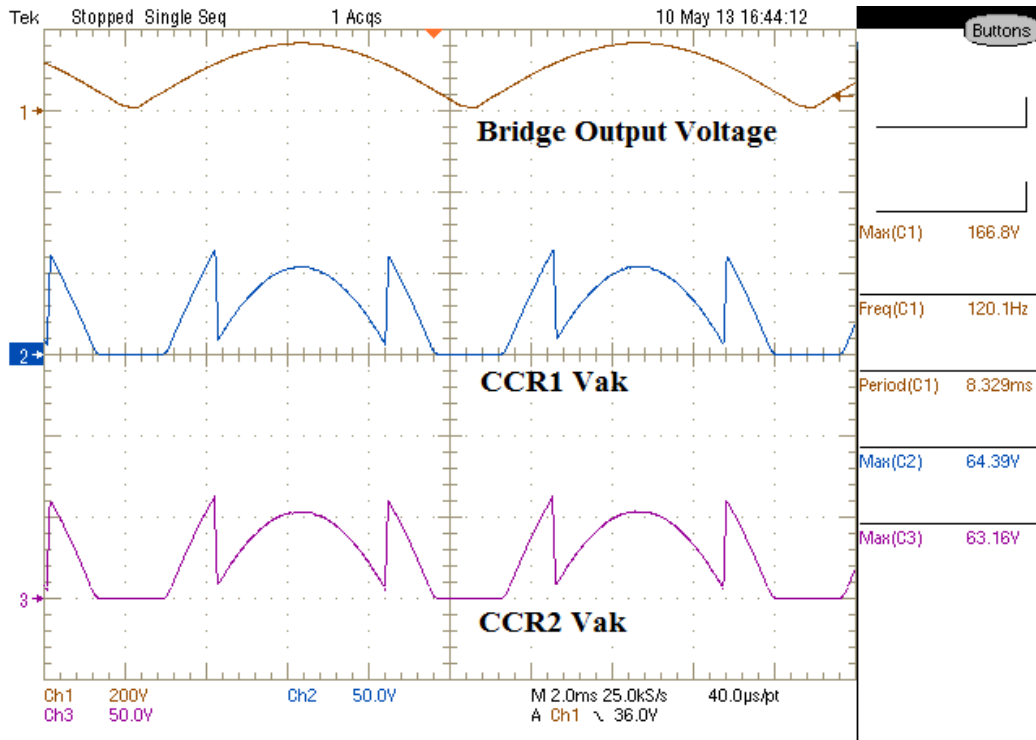


Figure 3. The Voltage across each CCR Changes as the Circuit Switches between Parallel and Series.

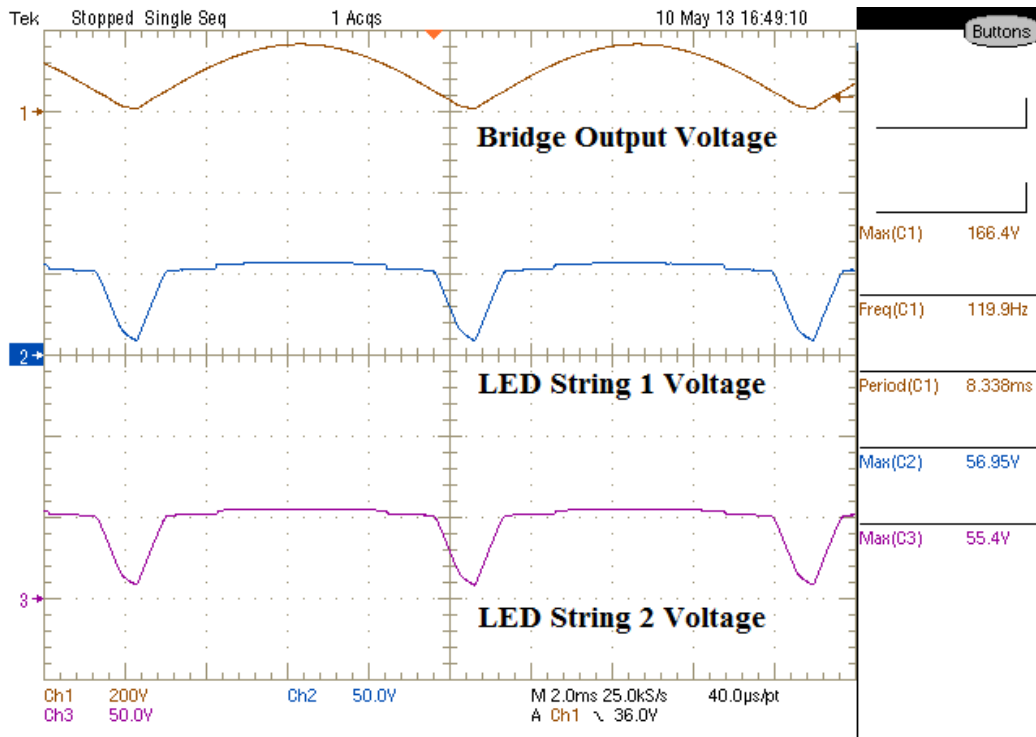


Figure 4. The LEDs are On for almost the Entire Cycle. Each LED String Consists of Fthree Cree MX-S LEDs.

DN05046/D

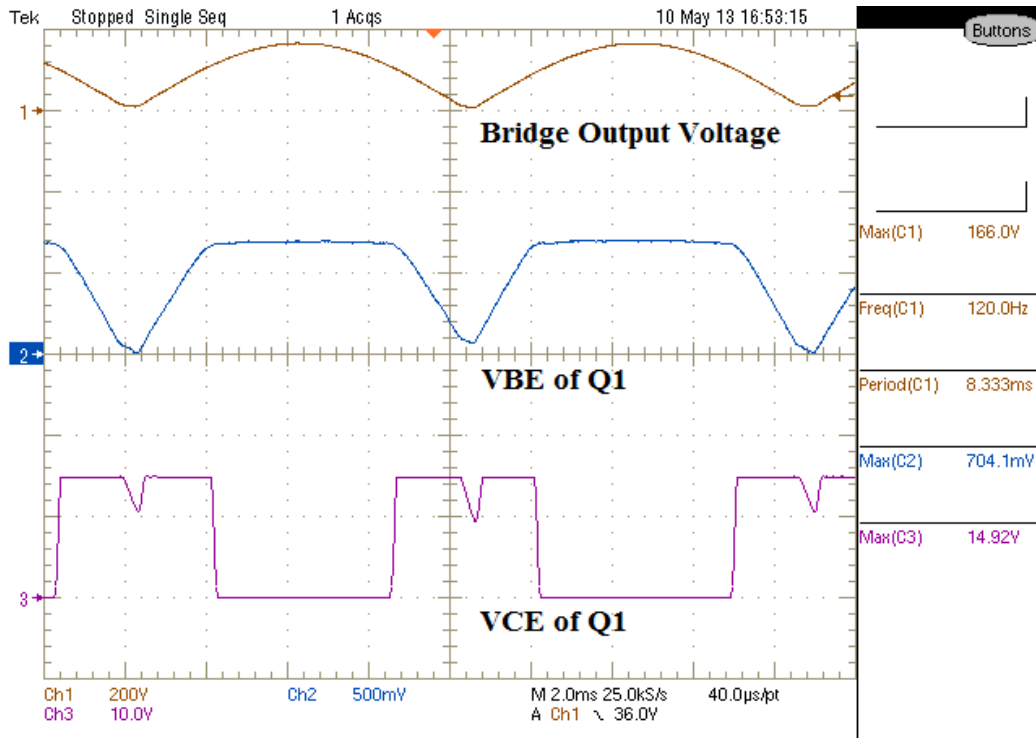


Figure 5. Q1 Switches as the Bridge Output Voltage Passes 110 V, Triggering the Switching of M1 and Q2.

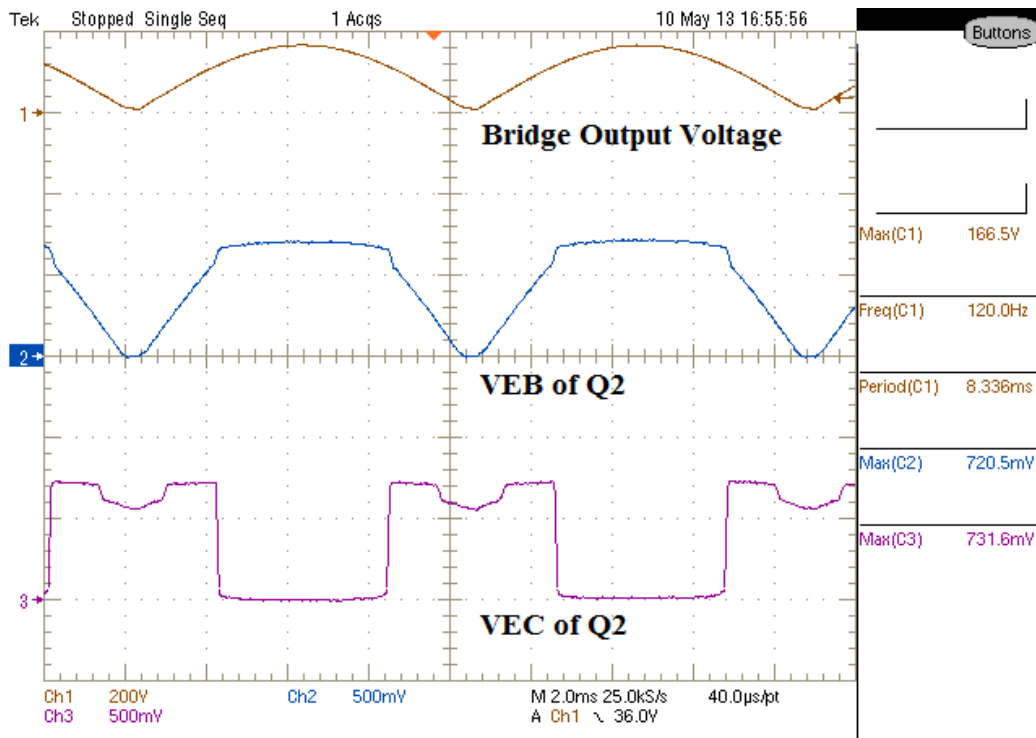


Figure 6. Q2 Switches as the Bridge Output Voltage Passes 110 V in Order to Cause Q3 to Switch.

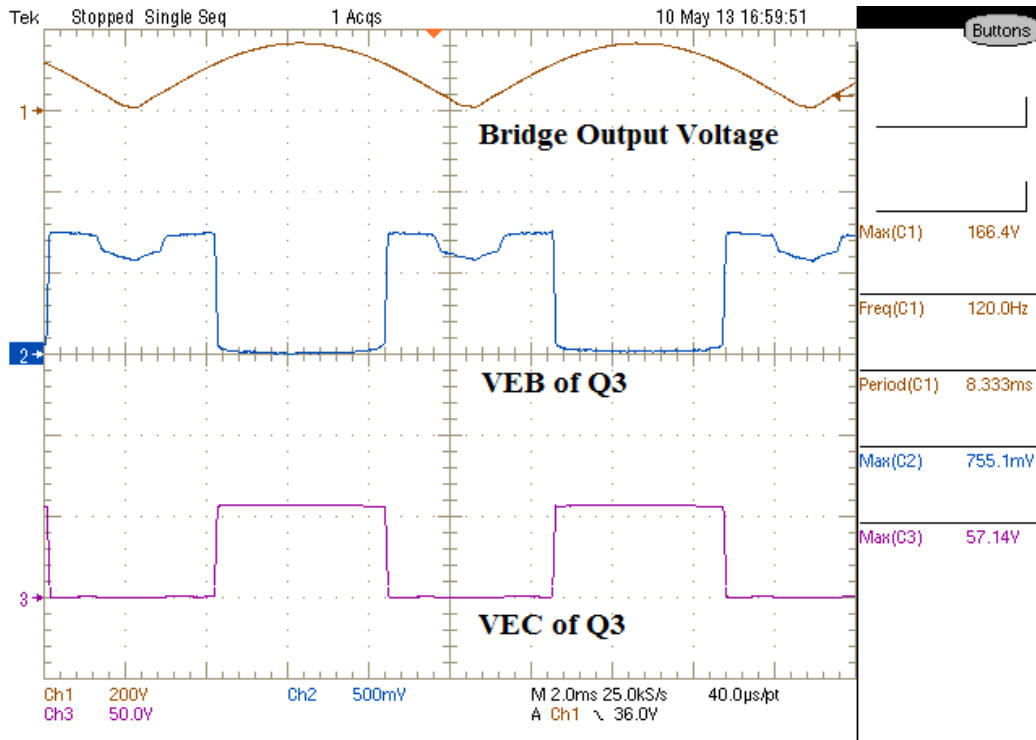


Figure 7. Q3 is Off when Q2 is On.

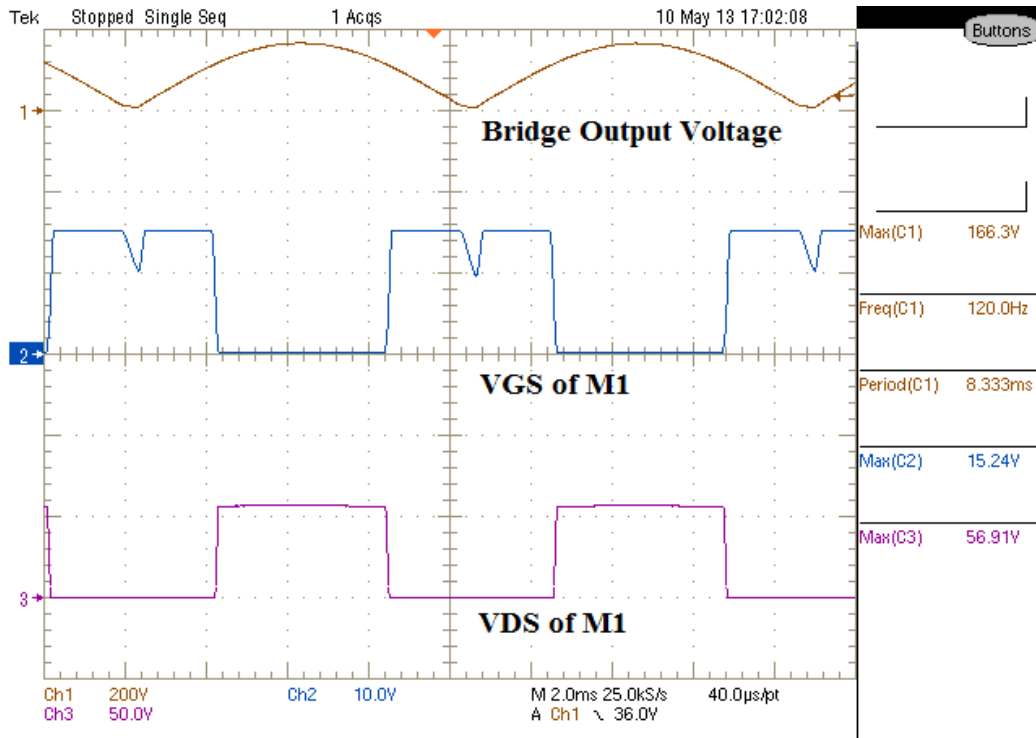


Figure 8. M1 is Pulled Low as Q1 Turns On.

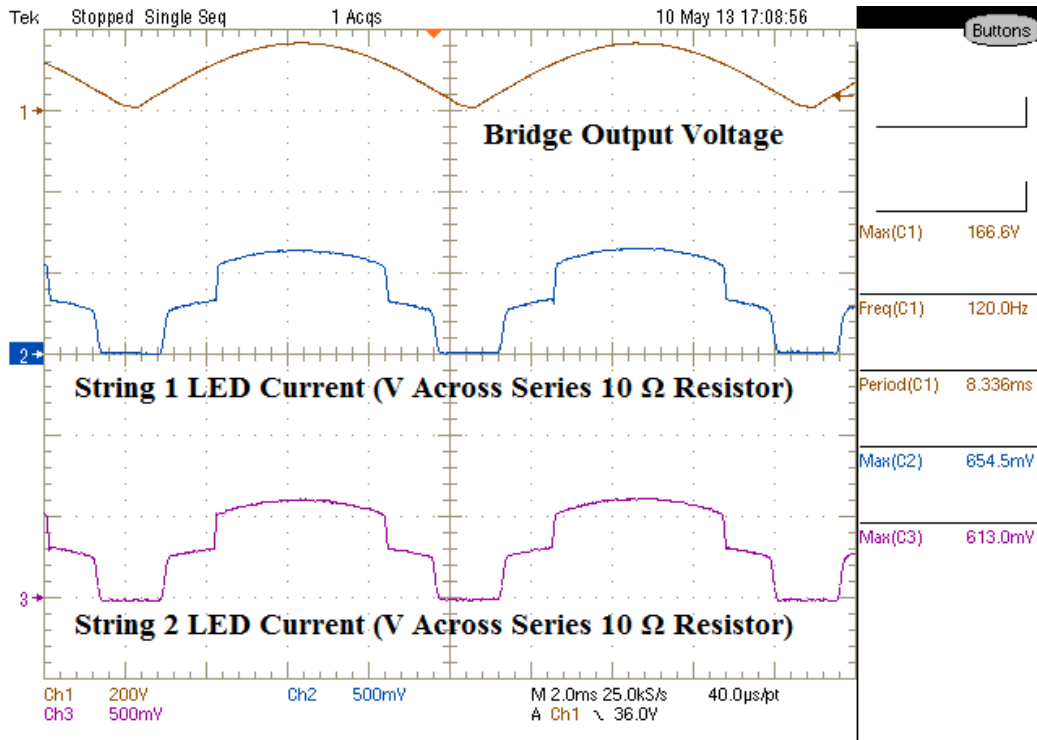


Figure 9. The LED Current in each String is 30 mA in Parallel Configuration and 60 mA in Series Configuration.

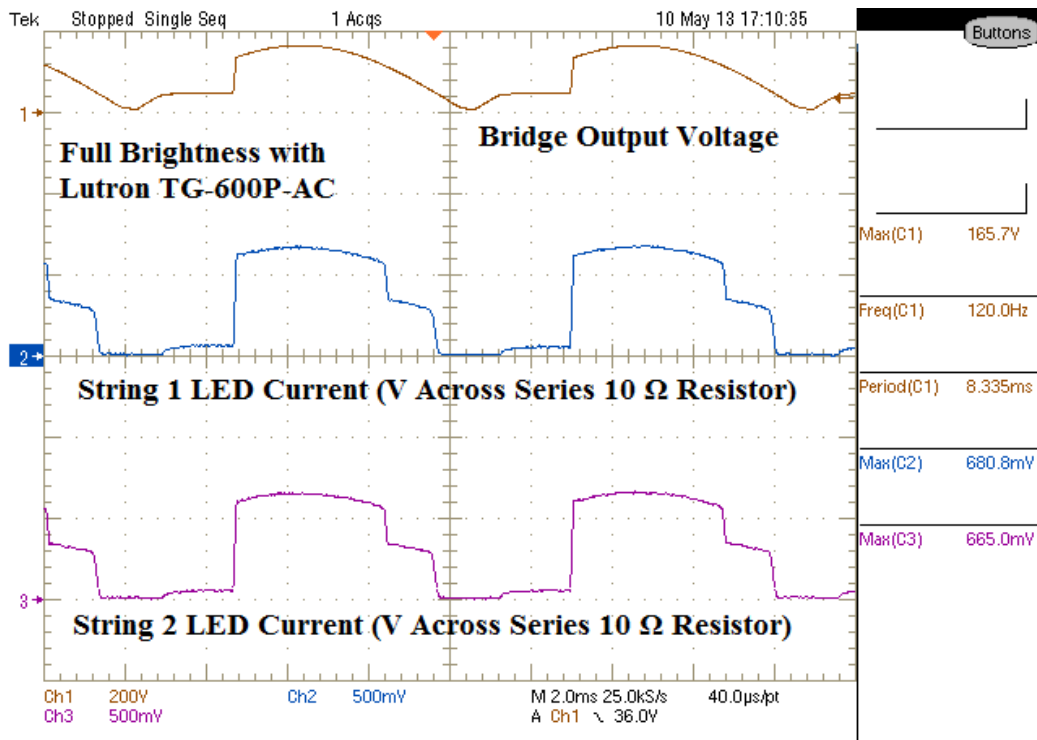


Figure 10. The Circuit is Fully Functional with Standard Phase-cut Incandescent Dimmers.

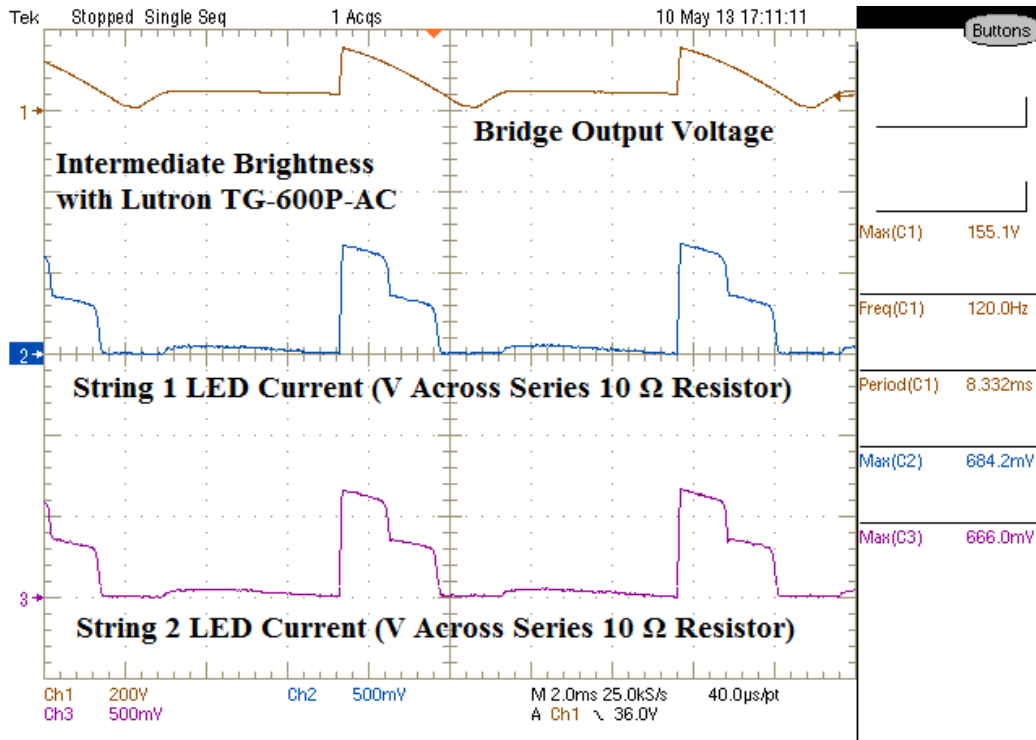


Figure 11. The Current Waveforms Closely Track the Bridge Output Voltage as the Circuit is Dimmed.

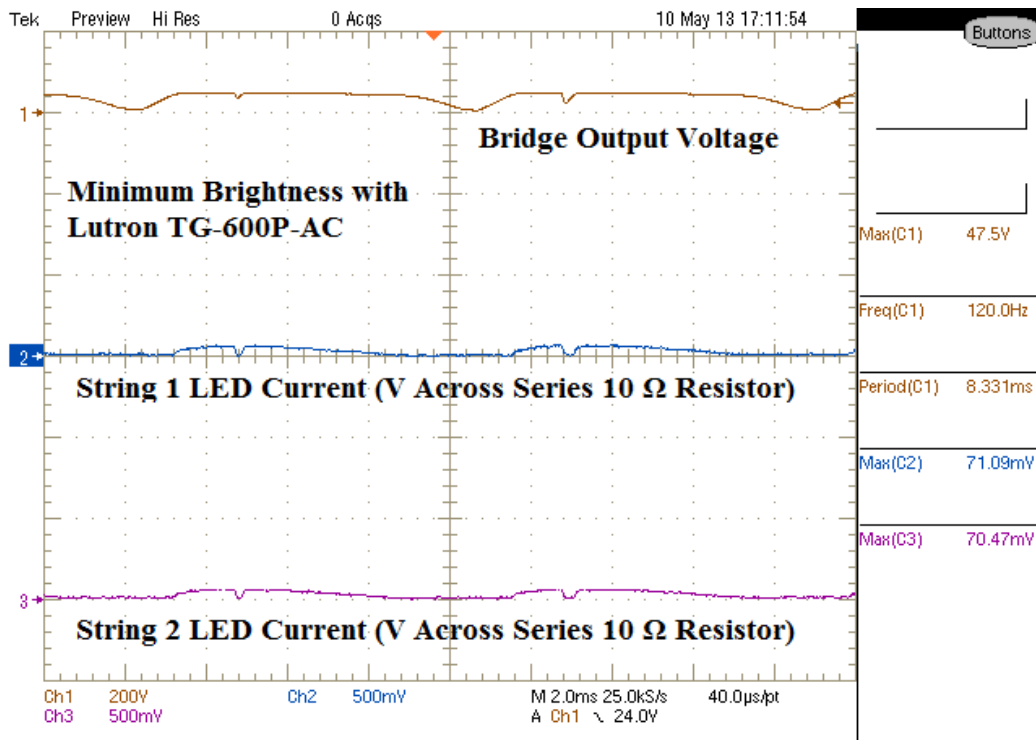


Figure 12. At the Least Bright Setting, the Lights are Barely On. Total Input Current was 7.1 mA_{rms}.

DN05046/D

Bill of Materials

Table 5. BILL OF MATERIALS FOR CIRCUIT SHOWN IN FIGURE 1

Designator	Qty	Description	Value	Tolerance	Manufacturer	Part Number
C1	1	Capacitor	2.2 nF, 250 V	–	Any	–
C2	1	Capacitor	1 nF, 10 V	–	Any	–
CCR1–CCR2	2	Constant Current Regulator	120 V, 30 mA	±15%	ON Semiconductor	NSIC2030B
D1–D4	4	Diode	400 V, 1 A	–	ON Semiconductor	MRA4004
D5–D6	2	Diode	75 V, 200 mA	–	ON Semiconductor	BAS16H
F1	1	Fuse	250 Vac, 1 A	–	Any	–
LED1–LED6	6	LED	20 V, 175 mA	–	Cree	MX–6S
M1	1	N-MOSFET	100 V, 17 A	–	ON Semiconductor	NTD6416AN
MOV1	1	Varistor	150 V	–	Littelfuse	V150LA5P
Q1	1	NPN	40 V, 200 mA	–	ON Semiconductor	MMBT3904L
Q2	1	PNP	40 V, 200 mA	–	ON Semiconductor	MMBT3906L
Q3	1	PNP	150 V, 500 mA	–	ON Semiconductor	MMBT5401L
R1	1	Resistor	1 M Ω , 1/8 W	±1%	Any	–
R2	1	Resistor	6.2 k Ω , 1/8 W	±1%	Any	–
R3	1	Resistor	360 Ω , 1/8 W	±1%	Any	–
R4	1	Resistor	62 k Ω , 1/8 W	±1%	Any	–
R5	1	Resistor	10 Ω , 1/8 W	±10%	Any	–
R6	1	Resistor	150 k Ω , 1/8 W	±10%	Any	–
Z1	1	Zener Diode	15 Vz	±5%	ON Semiconductor	MMSZ15

DN05046/D

Bill of Materials

Table 8. BILL OF MATERIALS FOR ALTERNATIVE CIRCUIT

Designator	Qty	Description	Value	Tolerance	Manufacturer	Part Number
C1	1	Capacitor	2.2 nF, 250 V	–	Any	–
C2	1	Capacitor	1 nF, 10 V	–	Any	–
CCR1–CCR2	2	Constant Current Regulator	120 V, 30 mA	±15%	ON Semiconductor	NSIC2030B
D1–D4	4	Diode	400 V, 1 A	–	ON Semiconductor	MRA4004
D5–D6	2	Diode	100 V, 200 mA	–	ON Semiconductor	MMBD914L
F1	1	Fuse	250 Vac, 1 A	–	Any	–
LED1–LED6	6	LED	20 V, 175 mA	–	Cree	MX–6S
MOV1	1	Varistor	150 V	–	Littelfuse	V150LA5P
Q1	1	NPN	40 V, 200 mA	–	ON Semiconductor	MMBT3904L
Q2	1	NPN	350 V, 100 mA	–	ON Semiconductor	MMBT6517L
Q3	1	NPN	150 V, 600 mA	–	ON Semiconductor	MMBT5550L
Q4	1	PNP	150 V, 500 mA	–	ON Semiconductor	MMBT5401L
R1	1	Resistor	1 MΩ, 1/8 W	±1%	Any	–
R2	1	Resistor	6.2 kΩ, 1/8 W	±1%	Any	–
R3	1	Resistor	301 kΩ, 1/8 W	±1%	Any	–
R4	1	Resistor	10 MΩ, 1/8 W	±5%	Any	–
R5	1	Resistor	27 kΩ, 1/8 W	±1%	Any	–
R6	1	Resistor	27 kΩ, 1/8 W	±1%	Any	–
R7	1	Resistor	2.2 kΩ, 1/8 W	±1%	Any	–
R8	1	Resistor	2.2 kΩ, 1/8 W	±1%	Any	–

ON Semiconductor and **ON** are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of SCILLC's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor
P.O. Box 5163, Denver, Colorado 80217 USA
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada
Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free
USA/Canada
Europe, Middle East and Africa Technical Support:
Phone: 421 33 790 2910
Japan Customer Focus Center
Phone: 81-3-5817-1050

ON Semiconductor Website: www.onsemi.com

Order Literature: <http://www.onsemi.com/orderlit>

For additional information, please contact your local Sales Representative