

ON Semiconductor

Is Now

onsemi™

To learn more about onsemi™, please visit our website at
www.onsemi.com

onsemi and **onsemi** and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi** product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner. Other names and brands may be claimed as the property of others.

Multiple CAN Bus Network

Prepared by: Tom De Ryck
ON Semiconductor



ON Semiconductor®

<http://onsemi.com>

APPLICATION NOTE

This application note describes how to build a multiple CAN bus network by using AMIS-42700 or AMIS-42770. A real application is used as an example.

Application Description

Figure 1 gives a simplified representation of the initial application.

The application consists of 18 CAN nodes which are grouped by three nodes. CAN nodes in one group are located near each other and at a distance of 2 m from the Network Connection Board. The different CAN node groups are not necessarily close to each other.

Each CAN node consists of an input and output connection making it easy to connect a CAN node to the

CAN bus. Inside the CAN node, the input is connected with the output making one big CAN bus¹.

Correct termination of the network is taken care of inside the Network Connection Board.

Because the CAN node groups are located at a distance of 2 m from the Network Connection Board, the minimum wire length a signal has to cross between two CAN node groups is 4 m. The maximum wire length is 20 m (for instance when there is communication between node 1 and node 18).

When a fault condition occurs on the bus, communication is not possible anymore between CAN nodes.

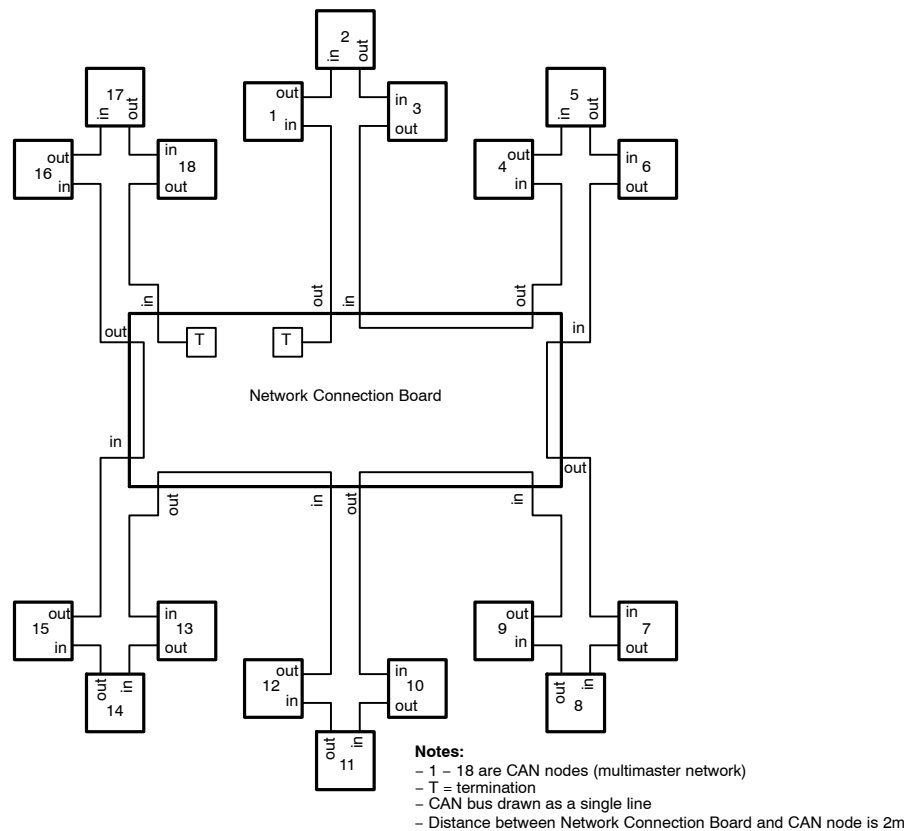


Figure 1. Initial Application

1. Because the input connection of the CAN node is connected with the output connection, input and output can be swapped.

CAN Bus Network

In the above bus topology a total wire length of 24 m is needed which is long considering that only six CAN groups are present, each at a distance of 2 m from the Network Connection Board.

Figure 2 gives a simplified view on how these problems can be solved by using AMIS-42700 or AMIS-42770.

To be consistent with the initial application, the same CAN nodes are used in Figure 2. The distance between the Network Connection Board and the CAN nodes in this example is also 2 m. Notice that now only 12 m of CAN bus cable is needed instead of 24 m.

As can be seen in Figure 2, all CAN node groups are located on a separate bus. Because of this, a CAN bus failure

on one CAN bus will not affect the other CAN busses making communication on the other CAN busses still possible (even between CAN busses), unlike the example given in Figure 1.

Notice that only one termination is foreseen at the end of each CAN bus. To avoid reflections on the CAN bus, two terminations of 120 Ω must be foreseen at each end of the CAN bus. Depending on the application, one termination of 60 Ω can also be sufficient. In this application only one resistor is used (for each CAN bus) of 60 Ω in the Network Connection Board (see also Figure 3).

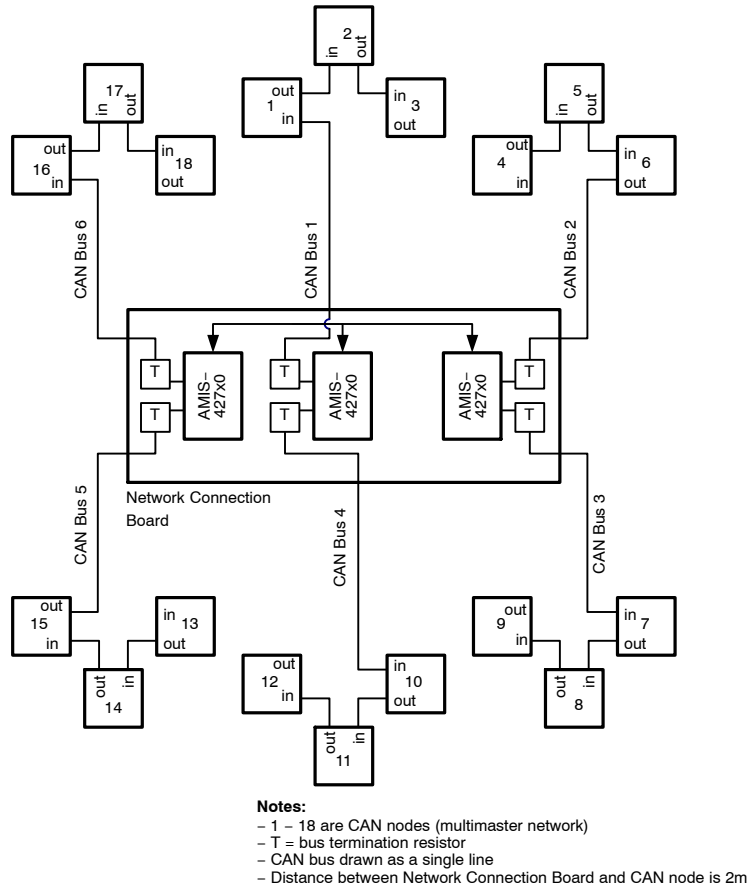


Figure 2. 6 CAN Bus Network

Test set up

A test set up was built similar to Figure 2 with the AMIS-3052x Evaluation Kit used as CAN nodes. This kit is the AMIS-3052x stepper motor driver kit which contains a microcontroller with on-chip CAN controller. The CAN transceiver used on this CAN node is either AMIS-42665 or

AMIS-42675. A CAN bus cable of 2 m was used to connect the CAN nodes to the Network Connection Board (5.7 ns/m cable propagation delay at 1 MHz).

Figure 3 gives a more detailed view on the Network Connection Board.

AND8351

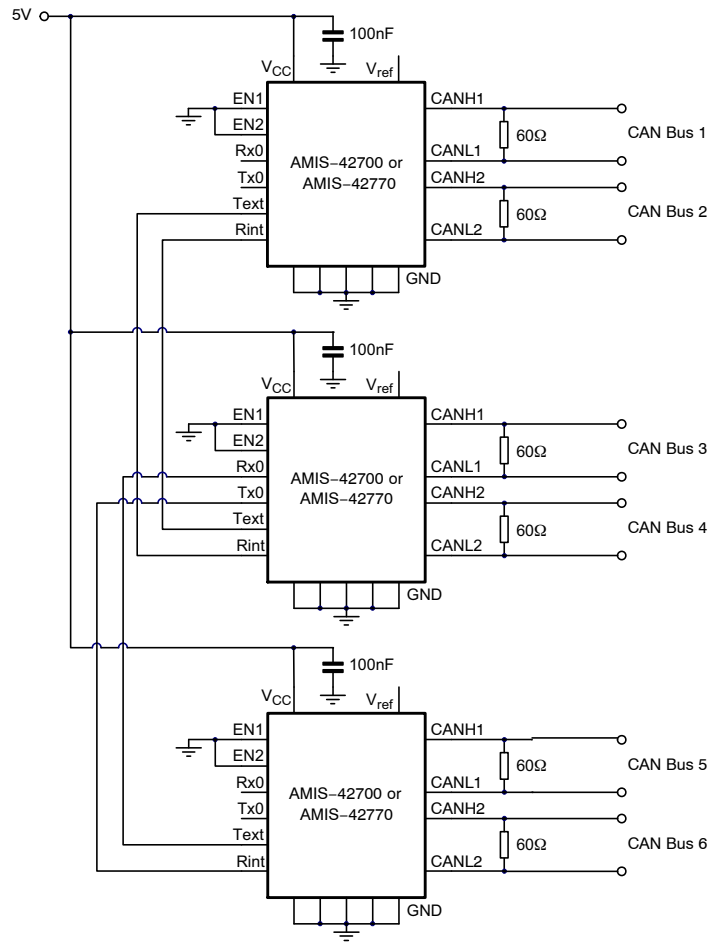


Figure 3. 6 CAN Bus Network Connection Board

As can be seen in Figure 3, only three AMIS-42700 or AMIS-42770 are needed to build a 6 CAN bus network (no additional logic needed). In the test set up, only a 60 Ω termination resistor is placed (see Figure 3). Because of this, no termination is needed on the other end of the CAN bus².

Knowing that AMIS-42700/AMIS-42770 introduces bus delay, tests were done to find the upper speed limit.

Limitations

Communication at 1 Mbps is not possible because AMIS-42700/AMIS-42770 adds delay to the signal. Taking Figure 3 as a reference, the added signal delay between CAN bus 1 and CAN bus 2 caused by AMIS-42700/AMIS-42770 will be 245 ns (worst case). Knowing that the cable used in the set up (see Figure 2) has a propagation delay of 5.7 ns/m, one can say that AMIS-42700/AMIS-42770 adds a delay equal to about 43 m of cable. For the CAN nodes it will look like the CAN cable is 47 m long.

The added delay between CAN bus 1 (or 2) and CAN bus 3 (or 4) will be a few nanoseconds more (about 260 ns in total) which is equal to about 45 m of cable. For the CAN nodes it will look like the CAN cable is 49 m long.

In general, the maximum signal delay added by AMIS-42700/AMIS-42770 will be about 260 ns worst case (in this bus topology). Although the signal only has to propagate over 4 m of cable, the added delay by AMIS-42700/AMIS-42770 will make it look like it is actually about 47 m or higher. Knowing that 1 Mbps CAN communication is limited to 40 m bus length, AMIS-42700/AMIS-42770 will introduce too much delay to be able to work at a CAN speed of 1 Mbps (in this bus topology).

During the test, communication up to 500 kbps was possible³. A fault condition on one of the CAN busses had no effect on the communication of the other busses.

2. To avoid reflections, two terminations of 120 Ω have to be placed at both ends of the CAN bus. Depending on the application, one termination of 60 Ω at one end can be sufficient.

3. CAN Bit Length = 8TQ, SJW = 1TQ, TSEG1 = 5TQ, TSEG2 = 2TQ

AND8351

Multiple CAN Bus Network

AMIS-42700/AMIS-42770 makes it possible to build a multiple CAN bus network. Where Figure 3 demonstrates how to build a 6 CAN-bus network, an 8 CAN-bus network can easily be built by adding one additional AMIS-42700/AMIS42770 (see Figure 4). Building a 10 CAN bus network or a 12 CAN bus network is also possible by adding additional AMIS-42700/AMIS-42770. Connect

the Tx0 signal with the Rint signal of the next AMIS-42700/AMIS-42770 and also the Rx0 signal with the Text signal.

Whether 500 kbps will still be obtainable depends on the network; the more AMIS-42700/AMIS-42770 are added, the more signal delay will be introduced between a CAN bus of the first AMIS-42700/AMIS-42770 and a CAN bus of the last AMIS-42700/AMIS-42770. This has to be kept in mind.

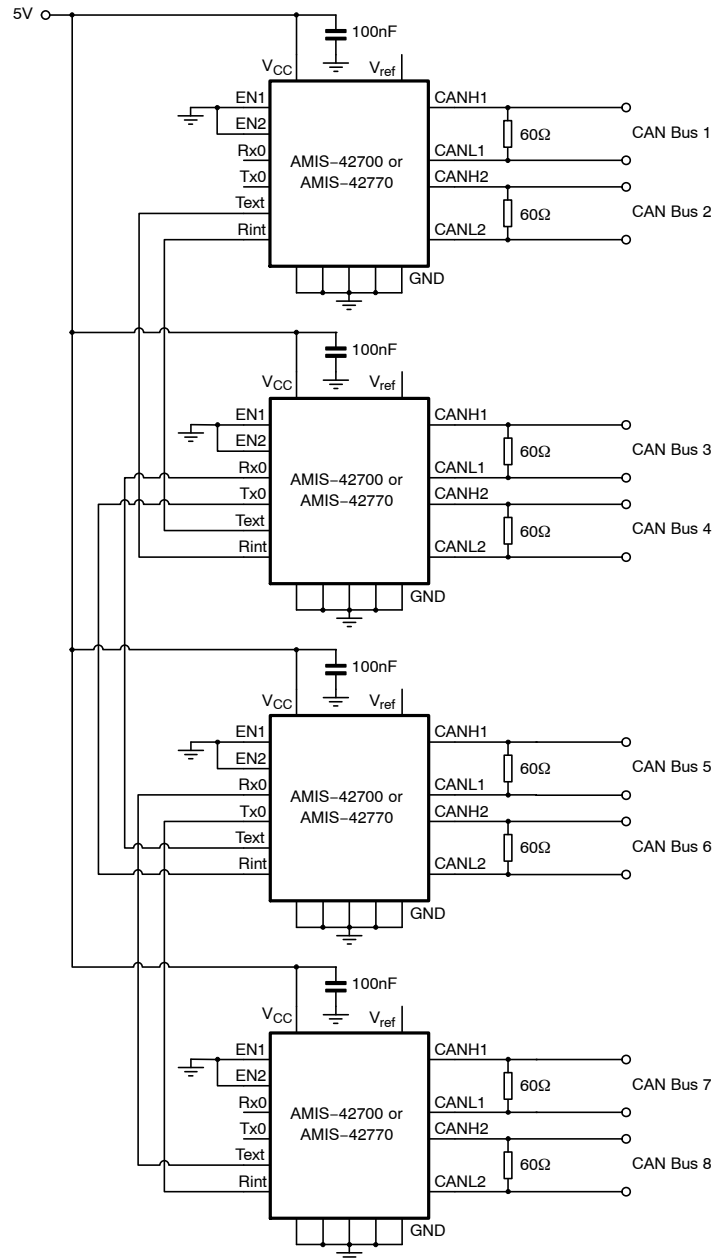


Figure 4. 8 CAN Bus Network

Higher Speed

As mentioned previously, 1 Mbps cannot be obtained (in this bus topology). Taking the original application (Figure 1), the maximum bus length is 20 m. Although never tested, 1 Mbps should be possible in this application.

The fact that 1 Mbps can not be obtained does not mean that the CAN baud rate of the multiple CAN bus system (e.g. Figure 2) will always be lower than the original application. Assuming that, in the original application, the CAN node

AND8351

groups are located at a distance of 20 m (instead of 2 m), the worst case bus length will be 200 m.

Although never actually tested, the assumed maximum CAN baud rate will be 250 kbps. Taking the 6 CAN bus network (Figure 2), the maximum bus length will be 40 m. Knowing that the Network Connection Board will add signal delay similar to about 50 m of cable (worst case), the total signal delay (in one direction) will be less than 100 m

of cable. At this cable length, 500 kbps CAN baud rate should be possible.

Central CAN Nodes

In Figure 4, no CAN node is included in the Network Connection Board. Adding a CAN node can be done by connecting it to one of the CAN busses. An easier and less expensive way is displayed in next figure.

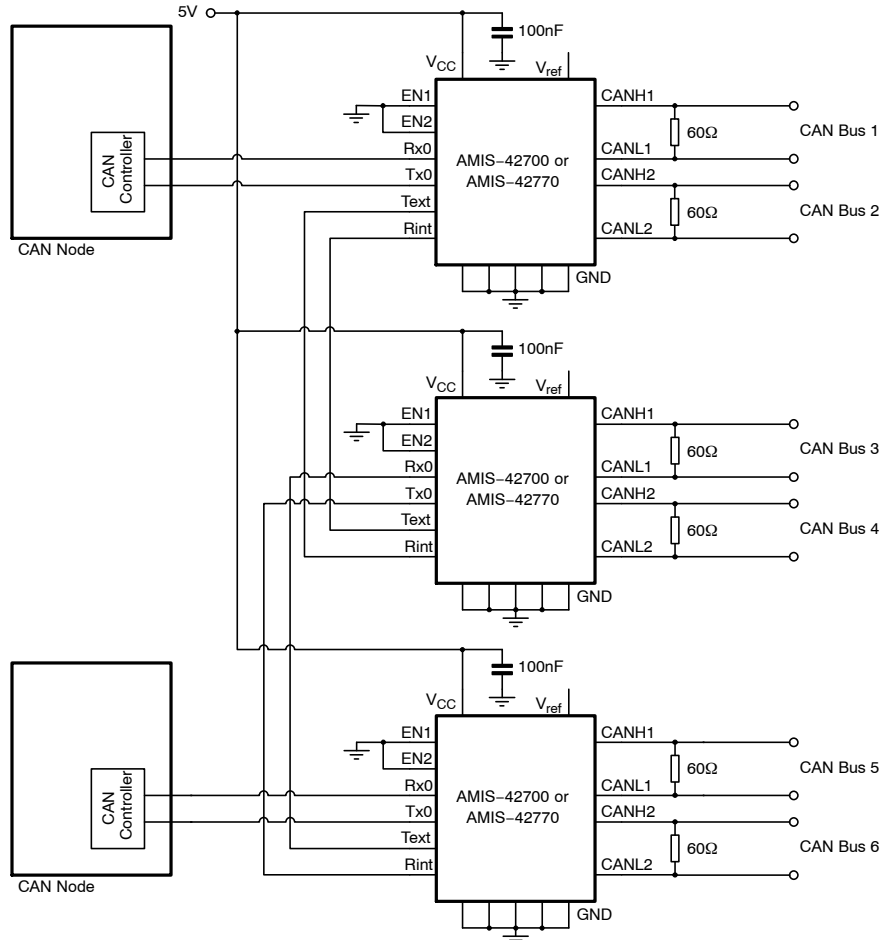



Figure 5. Adding CAN Nodes in Network Connection Board

By connecting the two CAN nodes as in Figure 5, two CAN transceivers can be saved, making the application less expensive.

Conclusion

By using AMIS-42700/AMIS-42770, a multiple CAN bus network can be built in a very easy and inexpensive way.

Additionally, the multiple CAN bus network will make the complete network more fault tolerant (safe) and also could save several meters of wire. Whether the same CAN baud rate can be obtained as in the original application depends on the bus topology.

ON Semiconductor and  are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor
P.O. Box 5163, Denver, Colorado 80217 USA
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada
Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free
USA/Canada
Europe, Middle East and Africa Technical Support:
Phone: 421 33 790 2910
Japan Customer Focus Center
Phone: 81-3-5773-3850

ON Semiconductor Website: www.onsemi.com
Order Literature: <http://www.onsemi.com/orderlit>

For additional information, please contact your local
Sales Representative