

# Li-Ion Switching Charger, High Efficiency, 1.55 A, with Integrated Power Path, USB-OTG, in a Small Solution Size

## FAN54063

### Description

The FAN54063 is a 1.55 A USB-compliant switch-mode charger featuring integrated power path operation, USB OTG boost support, JEITA temperature control, and production test mode support, in a small 25 bump, 0.4 mm pitch WLCSP package.

To facilitate fast system startup, the IC includes an integrated power path circuit, which disconnects the battery from the system rail, ensuring that the system can power up quickly following a VBUS connection. The power path circuit ensures that the system rail stays up when the charger is plugged in, even if the battery is dead.

The charging parameters and operating modes are programmable through an I<sup>2</sup>C Interface that operates up to 3.4 Mbps. The charger and boost regulator circuits switch at 3 MHz to minimize the size of external passive components.


The FAN54063 provides battery charging in three phases: conditioning, constant current and constant voltage. The IC automatically restarts the charge cycle when the battery falls below a voltage threshold. If the input source is removed, the IC enters a high-impedance mode blocking battery current from leaking to the input. Charger status is reported back to the host through the I<sup>2</sup>C port.

Dynamic input voltage control prevents a weak adapter's voltage from collapsing, ensuring charging capability from such adapters.

The FAN54063 is available in a space saving 2.4 mm x 2.0 mm WLCSP package.


### Features

- Fully Integrated, High-Efficiency Switch-Mode Charger for Single-Cell Li-Ion and Li-Polymer Batteries
- Integrated Power Path Circuit Ensures Fast System Startup with a Dead Battery when VBUS is Connected
- 1.55 A Maximum Charge Current
- Programmable High Accuracy Float Voltage:
  - ◆ ±0.5% at 25°C
  - ◆ ±1% from 0 to 125°C
- ±5% Input and Charge Current Regulation Accuracy
- Temperature-Sense Input for JEITA Compliance
- Thermal Regulation and Shutdown
- 4.2 V at 2.3 A Production Test Support
- 5 V, 500 mA Boost Mode for USB OTG



WLCSP25  
 CASE 567SQ

### MARKING DIAGRAM



- = Lot Code
- X = Year Code
- Y = 2 Weeks Code
- Z = Plant/Site Code

### ORDERING INFORMATION

See detailed ordering and shipping information on page 2 of this data sheet.

### Features (continued)

- 28 V Absolute Maximum Input Voltage
- 6 V Maximum Input Operating Voltage
- Programmable through High-Speed I<sup>2</sup>C Interface (3.4 Mb/s) with Fast Mode Plus Compatibility
  - ◆ Input Current
  - ◆ Fast-Charge / Termination Current
  - ◆ Float Voltage
  - ◆ Termination Enable
- 3 MHz Synchronous Buck PWM Controller with Wide Duty Cycle Range
- Small Footprint 1 μH External Inductor
- Safety Timer with Reset Control
- Dynamic Input Voltage Control
- Very Low Battery Current when Charger Inactive

### Applications

- Cell Phones, Smart Phones, PDAs
- Tablet, Portable Media Players
- Gaming Device, Digital Cameras

# FAN54063

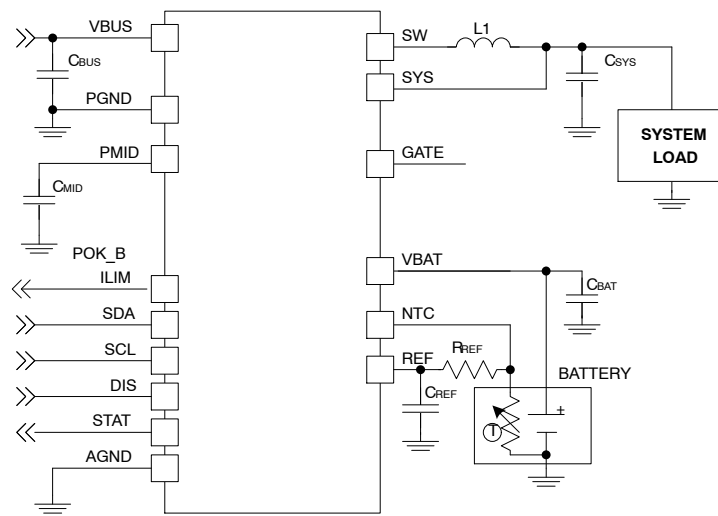


Figure 1. Typical Application

## ORDERING INFORMATION

| Part Number | Temperature Range | Package   | PN Bits:<br>IC_INFO[5:3] | Packing Method |
|-------------|-------------------|---|--------------------------|----------------|
| FAN54063UCX | -40 to 85°C       | 25-Bump, Wafer-Level Chip-Scale Package (WLCSP), 0.4 mm Pitch | 010                      | Tape and Reel  |

Table 1. FEATURE SUMMARY

| Part Number | Slave Address | Automatic Charge | Battery Absent Behavior | E1 Pin | Watchdog Timer Default |
|-------------|---------------|------------------|-------------------------|--------|------------------------|
| FAN54063    | 1101011       | No               | On                      | POK_B  | Disabled               |

# FAN54063

## Block Diagram

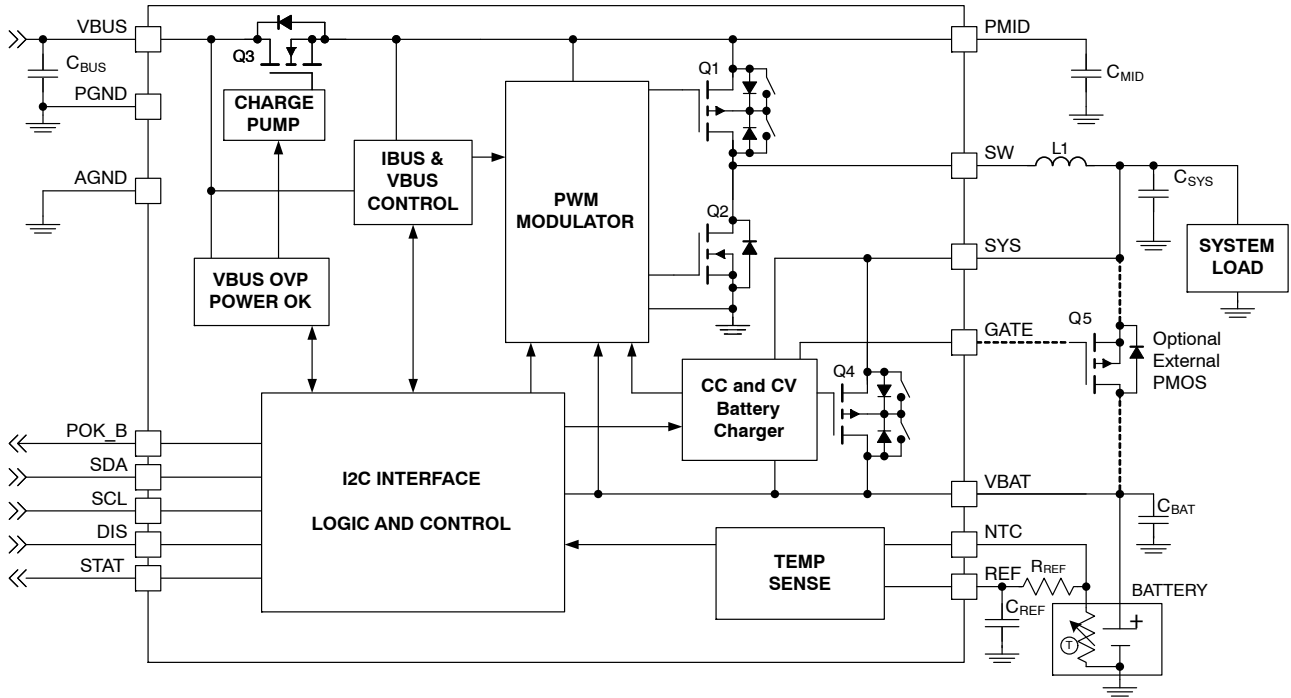


Figure 2. IC and System Block Diagram

Table 2. RECOMMENDED EXTERNAL COMPONENTS

| Component                           | Description                        | Vendor  | Parameter           | Typ. | Unit       |
|-------------------------------------|------------------------------------|---|---------------------|------|------------|
| L1                                  | 1 $\mu$ H, 20%, 4.0 A, 2016        | Semco CIGT201610EH1R0M<br>or Equivalent       | L                   | 1.0  | $\mu$ H    |
|                                     |                                    |   | DCR<br>(series R)   | 33   | m $\Omega$ |
| C <sub>BAT</sub> , C <sub>SYS</sub> | 10 $\mu$ F, 20%, 6.3 V, X5R, 0603  | Murata: GRM188R60J106M<br>TDK: C1608X5R0J106M | C                   | 10   | $\mu$ F    |
| C <sub>MID</sub>                    | 4.7 $\mu$ F, 10%, 10 V, X5R, 0603  | Murata: GRM188R61A475K<br>TDK: C1608X5R1A475K | C (Note 1)          | 4.7  | $\mu$ F    |
| C <sub>BUS</sub>                    | 1.0 $\mu$ F, 10%, 25 V, X5R, 0603  | Murata GRM188R61E105K<br>TDK:C1608X5R1E105M   | C                   | 1.0  | $\mu$ F    |
| C <sub>REF</sub>                    | 1 $\mu$ F, 10%, 6.3 V, X5R, 0402   |   | C                   | 1.0  | $\mu$ F    |
| Q5 (optional)                       | PMOS, 12 V, 16 m $\Omega$ , MLP2x2 | <b>onsemi</b> FDMA905P                        | R <sub>DS(ON)</sub> | 16   | m $\Omega$ |

1. 10 V rating is sufficient for C<sub>MID</sub> since PMID is protected from over-voltage surges on VBUS by Q3.

# FAN54063

## Pin Configuration

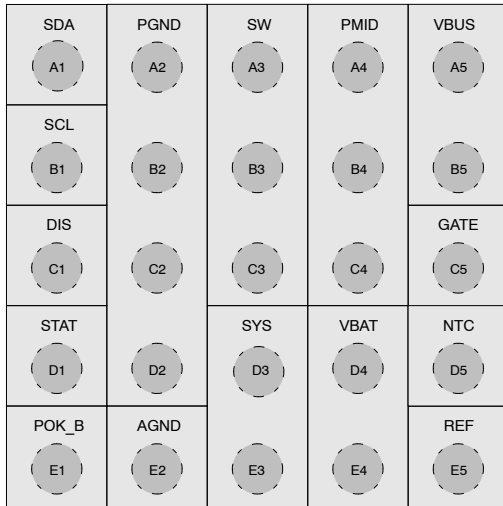


Figure 3. Top View

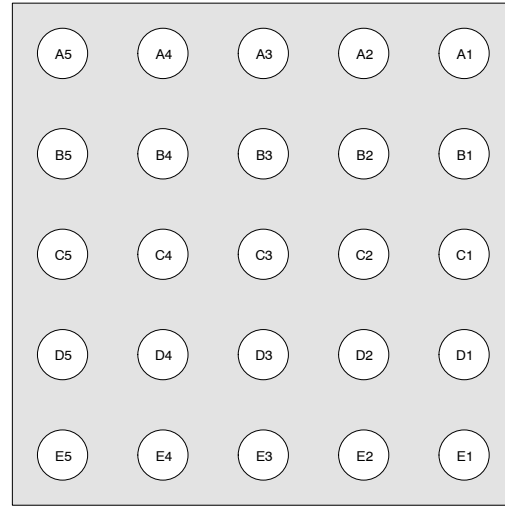


Figure 4. Bottom View

## PIN DEFINITIONS

| Pin #   | Name  | Description  |
|---------|-------|--|
| A1      | SDA   | <b>I<sup>2</sup>C Interface Serial Data.</b> This pin should not be left floating  |
| B1      | SCL   | <b>I<sup>2</sup>C Interface Serial Clock.</b> This pin should not be left floating   |
| C1      | DIS   | <b>Disable.</b> If this pin is held HIGH, Q1 and Q3 are turned off; creating a HIGH Z condition at VBUS and the PWM converter is disabled  |
| D1      | STAT  | <b>Status.</b> Open-drain output indicating charge status. The IC pulls this pin LOW when charge is in progress and is also used to signal the host processor when a fault condition occurs  |
| E1      | POK_B | <b>Power OK.</b> Open-drain output that pulls LOW when VBUS is plugged in and the battery has risen above V <sub>LOWV</sub> . This signal is used to signal the host processor that it can begin to draw significant current   |
| A2 – D2 | PGND  | <b>Power Ground.</b> Power return for gate drive and power transistors. The connection from this pin to the bottom of C <sub>MID</sub> should be as short as possible  |
| E2      | AGND  | <b>Analog Ground.</b> All IC signals are referenced to this node   |
| A3 – C3 | SW    | <b>Switching Node.</b> Connect to output inductor  |
| D3 – E3 | SYS   | <b>System Supply.</b> Output voltage of the switching charger and input to the power path controller. Bypass SYS to PGND with a 10 μF capacitor  |
| A4 – C4 | PMID  | <b>Power Input Voltage.</b> Power input to the charger regulator, bypass point for the input current sense. Bypass with a minimum of a 4.7 μF, 6.3 V capacitor to PGND   |
| D4 – E4 | VBAT  | <b>Battery Voltage.</b> Connect to the positive (+) terminal of the battery pack. Bypass with a 10 μF capacitor to PGND. VBAT is a power path connection   |
| A5 – B5 | VBUS  | <b>Charger Input Voltage and USB-OTG Output Voltage.</b> Bypass with a 1 μF capacitor to PGND  |
| C5      | GATE  | <b>External MOSFET Gate.</b> This pin controls the gate of an optional external P-channel MOSFET transistor used to augment the internal power-path FET (Q4) during battery discharge. The source of the P-channel MOSFET should be connected to SYS and the drain should be connected to VBAT |
| D5      | NTC   | <b>Thermistor Input.</b> The IC compares this node with taps on a resistor divider from REF to inhibit auto-charging when the battery temperature is outside of permitted fast-charge limits   |
| E5      | REF   | <b>Reference Voltage.</b> REF is a 1.8 V regulated output  |

**ABSOLUTE MAXIMUM RATINGS**

| Symbol                            | Parameter   |  | Min.    | Max.            | Unit       |    |
|-----------------------------------|---|--|---------|-----------------|------------|----|
| V <sub>BUS</sub>                  | Voltage on VBUS Pin   | Continuous                                   | -0.3    | 28.0            | V          |    |
|                                   |   | Pulsed, 100 ms Maximum Non-Repetitive        | -1.0    |                 |            |    |
| V <sub>I</sub>                    | Voltage on PMID, SW, SYS, VBAT, STAT, DIS Pins                          |  | -0.3    | 7.0             | V          |    |
| V <sub>O</sub>                    | Voltage on Other Pins   |  | -0.3    | 6.5<br>(Note 2) | V          |    |
| $\frac{\Delta V_{BUS}}{\Delta t}$ | Maximum V <sub>BUS</sub> Slope Above 5.5 V when Boost or Charger Active |  |         | 4               | V/ $\mu$ s |    |
| ESD                               | Electrostatic Discharge Protection Level                                | Human Body Model per JESD22-A114             | 2000    |                 | V          |    |
|                                   |   | Charged Device Model per JESD22-C101         | 500     |                 |            |    |
|                                   | IEC 61000-4-2 System ESD (Note 3)                                       | USB Connector Pins (V <sub>BUS</sub> to GND) | Air Gap | 15              |            | kV |
|                                   |   |  | Contact | 8               |            |    |
| T <sub>J</sub>                    | Junction Temperature  |  | -40     | +150            | °C         |    |
| T <sub>STG</sub>                  | Storage Temperature   |  | -65     | +150            | °C         |    |
| T <sub>L</sub>                    | Lead Soldering Temperature, 10 Seconds                                  |  |         | +260            | °C         |    |

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

2. Lesser of 6.5 V or V<sub>I</sub> + 0.3 V.
3. Guaranteed if C<sub>BUS</sub> ≥ 1  $\mu$ F and C<sub>MID</sub> ≥ 4.7  $\mu$ F.

**RECOMMENDED OPERATING CONDITIONS**

| Symbol                             | Parameter  |                       | Min. | Max. | Unit       |
|------------------------------------|--|-----------------------|------|------|------------|
| V <sub>BUS</sub>                   | Supply Voltage   |                       | 4    | 6    | V          |
| V <sub>BAT(MAX)</sub>              | Maximum Battery Voltage when Boost enabled   |                       |      | 4.5  | V          |
| $-\frac{\Delta V_{BUS}}{\Delta t}$ | Negative VBUS Slew Rate during VBUS Short Circuit, C <sub>MID</sub> ≤ 4.7 $\mu$ F, see VBUS Short While Charging | T <sub>A</sub> ≤ 60°C |      | 4    | V/ $\mu$ s |
|                                    |  | T <sub>A</sub> ≥ 60°C |      | 2    |            |
| T <sub>A</sub>                     | Ambient Temperature  |                       | -30  | +85  | °C         |
| T <sub>J</sub>                     | Junction Temperature (see Thermal Regulation and Shutdown)   |                       | -30  | +120 | °C         |

Functional operation above the stresses listed in the Recommended Operating Ranges is not implied. Extended exposure to stresses beyond the Recommended Operating Ranges limits may affect device reliability.

**THERMAL PROPERTIES**

Junction-to-ambient thermal resistance is a function of application and board layout. This data is measured with four-layer 2s2p boards in accordance to JEDEC standard JESD51. Special attention must be paid not to exceed junction temperature T<sub>J(max)</sub> at a given ambient temperature T<sub>A</sub>.

| Symbol        | Parameter                              | Typical | Unit |
|---------------|--|---------|------|
| $\theta_{JA}$ | Junction-to-Ambient Thermal Resistance | 50      | °C/W |
| $\theta_{JB}$ | Junction-to-PCB Thermal Resistance     | 20      | °C/W |

# FAN54063

## ELECTRICAL SPECIFICATIONS

Unless otherwise specified: according to the circuit of Figure 1; recommended operating temperature range for  $T_J$  and  $T_A$ ;  $V_{BUS} = 5.0\text{ V}$ ;  $HZ\_MODE = "0"$ ;  $OPA\_MODE = "0"$  (Charge Mode); SCL, SDA = 0 or 1.8 V; and typical values are for  $T_J = 25^\circ\text{C}$ . Min. and Max. values are not tested in production, but are determined by characterization.

| Symbol | Parameter | Conditions | Min. | Typ. | Max. | Unit |
|--------|-----------|------------|------|------|------|------|
|--------|-----------|------------|------|------|------|------|

### POWER SUPPLIES

|               |   |   |      |       |       |               |
|---------------|---|---|------|-------|-------|---------------|
| $I_{VBUS}$    | VBUS Current  | PWM Switching   |      | 20    |       | mA            |
|               |   | $V_{BAT} > V_{OREG}$<br>$I_{BUSLIM} = 500\text{ mA}$  |      | 6     |       | mA            |
|               |   | $0^\circ\text{C} < T_J < 85^\circ\text{C}$ , $HZ\_MODE = "1"$ or<br>DIS pin HIGH,<br>$V_{BAT} > V_{LOWV}$ |      | 190   | 280   | $\mu\text{A}$ |
| $I_{BAT\_HZ}$ | Battery Discharge Current in High-Impedance Mode            | DIS pin HIGH, or $HZ\_MODE = "1"$ ,<br>$V_{BAT} = 4.35\text{ V}$  |      | <1.25 | 10.00 | $\mu\text{A}$ |
| $I_{BUS\_HZ}$ | Battery Leakage Current to $V_{BUS}$ in High-Impedance Mode | DIS pin HIGH or $HZ\_MODE = "1"$ ,<br>$V_{BAT} = 4.35\text{ V}$ ,<br>$V_{BUS}$ Shorted to Ground          | -5.0 | -0.2  |       | $\mu\text{A}$ |

### CHARGER VOLTAGE REGULATION

|            |                         |   |      |  |      |   |
|------------|-------------------------|---|------|--|------|---|
| $V_{OREG}$ | Charge Voltage Range    |   | 3.51 |  | 4.45 | V |
|            | Charge Voltage Accuracy | $T_A = 25^\circ\text{C}$ , $V_{OREG} = 4.35\text{ V}$ | -0.5 |  | +0.5 | % |
|            |                         | $T_J = 0$ to $125^\circ\text{C}$                      | -1   |  | +1   | % |

### CHARGING CURRENT REGULATION (FAST CHARGE)

|             |                             |                             |     |     |      |    |
|-------------|-----------------------------|-----------------------------|-----|-----|------|----|
| $I_{OCHRG}$ | Output Charge Current Range | $IO\_LEVEL = "0"$           | 550 |     | 1550 | mA |
|             |                             | $IO\_LEVEL = "1"$ (default) | 165 | 200 | 230  | mA |
|             | Charge Current Accuracy     | $IO\_LEVEL = "0"$           | -5  |     | +5   | %  |

### WEAK BATTERY DETECTION

|            |                                 |  |     |    |     |    |
|------------|---------------------------------|--|-----|----|-----|----|
| $V_{LOWV}$ | Weak Battery Threshold Range    |  | 3.4 |    | 3.7 | V  |
|            | Weak Battery Threshold Accuracy |  | -5  |    | +5  | %  |
|            | Weak Battery Deglitch Time      |  |     | 32 |     | ms |

### PWM CHARGING THRESHOLD

|               |                                |  |     |     |     |   |
|---------------|--------------------------------|--|-----|-----|-----|---|
| $V_{BATMIN}$  | Rising PWM Charging Threshold  |  | 3.1 | 3.2 | 3.3 | V |
| $V_{BATFALL}$ | Falling PWM Charging Threshold |  |     | 3.0 |     | V |

### LOGIC LEVELS: DIS, SDA, SCL

|          |                          |                                |      |      |      |                  |
|----------|--------------------------|--------------------------------|------|------|------|------------------|
| $V_{IH}$ | High-Level Input Voltage |                                | 1.05 |      |      | V                |
| $V_{IL}$ | Low-Level Input Voltage  |                                |      |      | 0.4  | V                |
| $I_{IN}$ | Input Bias Current       | Input Tied to GND or $V_{BUS}$ |      | 0.01 | 1.00 | $\mu\text{A}$    |
| $R_{PD}$ | DIS Pull-Down Resistance | $V_{DIS} = 0.4\text{ V}$       |      | 300  |      | $\text{k}\Omega$ |

### CHARGE TERMINATION DETECTION

|            |  |   |     |    |     |    |
|------------|--|---|-----|----|-----|----|
| $I_{TERM}$ | Termination Current Range                  |   | 50  |    | 400 | mA |
|            | Termination Current Accuracy               | $I_{TERM}$ Setting $\leq 100\text{ mA}$ | -15 |    | +15 | %  |
|            |  | $I_{TERM}$ Setting $\geq 200\text{ mA}$ | -5  |    | +5  | %  |
|            | Termination Current Deglitch Time (Note 4) |   |     | 32 |     | ms |

# FAN54063

## ELECTRICAL SPECIFICATIONS (continued)

Unless otherwise specified: according to the circuit of Figure 1; recommended operating temperature range for  $T_J$  and  $T_A$ ;  $V_{BUS} = 5.0\text{ V}$ ;  $HZ\_MODE = "0"$ ;  $OPA\_MODE = "0"$  (Charge Mode);  $SCL, SDA = 0$  or  $1.8\text{ V}$ ; and typical values are for  $T_J = 25^\circ\text{C}$ . Min. and Max. values are not tested in production, but are determined by characterization.

| Symbol | Parameter | Conditions | Min. | Typ. | Max. | Unit |
|--------|-----------|------------|------|------|------|------|
|--------|-----------|------------|------|------|------|------|

### POWER PATH (Q4) CONTROL (PRECHARGE)

|             |   |   |     |     |     |    |
|-------------|---|---|-----|-----|-----|----|
| $I_{PP}$    | Power Path Maximum Charge Current                               | $IO\_LEVEL = "1"$ (default)                                 | 165 | 200 | 235 | mA |
|             |   | $IO\_LEVEL = "0"$ , $IBUSLIM \leq "01"$                     | 165 | 200 | 235 | mA |
|             |   | $IO\_LEVEL = "0"$ , $IBUSLIM > "01"$ , $IOCHARGE \leq "02"$ | 375 | 450 | 520 | mA |
|             |   | $IO\_LEVEL = "0"$ , $IBUSLIM > "01"$ , $IOCHARGE > "02"$    | 610 | 730 | 840 | mA |
| $V_{THSYS}$ | VBAT to SYS Threshold for Q4 and Gate Transition While Charging | (SYS-VBAT) Falling  | -6  | -5  | -3  | mV |
|             |   | (SYS-VBAT) Rising   | -1  | 1   | 2   | mV |

### PRODUCTION TEST MODE

|                             |                                |   |       |       |       |   |
|-----------------------------|--------------------------------|---|-------|-------|-------|---|
| $V_{BAT(P TM)}$<br>(Note 4) | Production Test Output Voltage | $1\text{ mA} < I_{BAT} < 2\text{ A}$ , $V_{BUS} = 5.5\text{ V}$ | 4.116 | 4.200 | 4.284 | V |
| $I_{BAT(P TM)}$<br>(Note 4) | Production Test Output Current | 20% Duty with Max. Period 10 ms                                 | 2.3   |       |       | A |

### BATTERY TEMPERATURE MONITOR (NTC)

|    |                                 |  |      |      |      |                |
|----|---------------------------------|--|------|------|------|----------------|
| T1 | T1 (0°C) Temperature Threshold  |  | 71.9 | 73.9 | 75.9 | % of $V_{REF}$ |
| T2 | T2 (10°C) Temperature Threshold |  | 62.6 | 64.6 | 66.6 |                |
| T3 | T3 (45°C) Temperature Threshold |  | 31.9 | 32.9 | 34.9 |                |
| T4 | T4 (60°C) Temperature Threshold |  | 21.3 | 23.3 | 25.3 |                |

### INPUT POWER SOURCE DETECTION

|                               |                            |                                      |  |      |      |    |
|-------------------------------|----------------------------|--------------------------------------|--|------|------|----|
| $V_{IN(MIN)1}$                | VBUS Input Voltage Rising  | To Initiate and Pass VBUS Validation |  | 4.35 | 4.45 | V  |
| $V_{IN(MIN)2}$                | Minimum VBUS during Charge | During Charging                      |  | 3.71 | 3.94 | V  |
| $t_{VBUS\_VALID}$<br>(Note 4) | VBUS Validation Time       |                                      |  | 32   |      | ms |

### VBUS CONTROL LOOP

|              |                             |  |    |  |    |   |
|--------------|-----------------------------|--|----|--|----|---|
| $V_{BUSLIM}$ | VBUS Loop Setpoint Accuracy |  | -3 |  | +3 | % |
|--------------|-----------------------------|--|----|--|----|---|

### INPUT CURRENT LIMIT

|              |                                       |                  |     |      |      |    |
|--------------|---------------------------------------|------------------|-----|------|------|----|
| $I_{BUSLIM}$ | Charger Input Current Limit Threshold | $IBUSLIM = "00"$ | 450 | 475  | 500  | mA |
|              |                                       | $IBUSLIM = "01"$ |     | 760  |      |    |
|              |                                       | $IBUSLIM = "10"$ | 972 | 1080 | 1188 |    |

### $V_{REF}$ BIAS GENERATOR

|           |                             |             |  |     |  |    |
|-----------|-----------------------------|-------------|--|-----|--|----|
| $V_{REF}$ | Bias Regulator Voltage      | Charge Mode |  | 1.8 |  | V  |
|           | Short-Circuit Current Limit |             |  | 2.5 |  | mA |

### BATTERY RECHARGE THRESHOLD

|           |                    |   |     |     |     |    |
|-----------|--------------------|---|-----|-----|-----|----|
| $V_{RCH}$ | Recharge Threshold | $V_{BAT}$ Below $V_{OREG}$                  | 100 | 120 | 150 | mV |
|           | Deglitch Time      | $V_{BAT}$ Falling Below $V_{RCH}$ Threshold |     | 130 |     | ms |

### STAT, POK\_B OUTPUTS

|            |                             |                           |  |  |     |               |
|------------|-----------------------------|---------------------------|--|--|-----|---------------|
| $V_{(OL)}$ | Output Low                  | $I_{SINK} = 10\text{ mA}$ |  |  | 0.4 | V             |
| $I_{(OH)}$ | Output High Leakage Current | $V_{OUTPUT} = 5\text{ V}$ |  |  | 1   | $\mu\text{A}$ |

# FAN54063

## ELECTRICAL SPECIFICATIONS (continued)

Unless otherwise specified: according to the circuit of Figure 1; recommended operating temperature range for  $T_J$  and  $T_A$ ;  $V_{BUS} = 5.0\text{ V}$ ;  $HZ\_MODE = "0"$ ;  $OPA\_MODE = "0"$  (Charge Mode); SCL, SDA = 0 or 1.8 V; and typical values are for  $T_J = 25^\circ\text{C}$ . Min. and Max. values are not tested in production, but are determined by characterization.

| Symbol | Parameter | Conditions | Min. | Typ. | Max. | Unit |
|--------|-----------|------------|------|------|------|------|
|--------|-----------|------------|------|------|------|------|

### BATTERY DETECTION

|              |  |   |  |      |  |    |
|--------------|--|---|--|------|--|----|
| $I_{DETECT}$ | Battery Detection Current before Charge Done (Sink Current) (Note 5) | Begins after Termination Detected and $V_{BAT} \leq V_{OREG} - V_{RCH}$ |  | -1.9 |  | mA |
| $t_{DETECT}$ | Battery Detection Time   |   |  | 262  |  | ms |

### SLEEP COMPARATOR

|           |   |  |   |      |      |   |
|-----------|---|--|---|------|------|---|
| $V_{SLP}$ | Sleep-Mode Entry Threshold, $V_{BUS} - V_{BAT}$ | $V_{IN(MIN)2} \leq V_{BAT} \leq V_{OREG}$ ,<br>$V_{BUS}$ Falling | 0 | 0.04 | 0.10 | V |
|-----------|---|--|---|------|------|---|

### POWER SWITCHES (see Figure 2)

|              |   |  |  |     |     |            |
|--------------|---|--|--|-----|-----|------------|
| $R_{DS(ON)}$ | Q3 On Resistance (VBUS to PMID)                                   | $I_{BUSLIM} = 500\text{ mA}$                         |  | 180 | 340 | m $\Omega$ |
|              | Q1 On Resistance (PMID to SW)                                     |  |  | 130 | 225 |            |
|              | Q2 On Resistance (SW to GND)                                      |  |  | 150 | 225 |            |
|              | Q4 On Resistance (SYS to VBAT)                                    | $V_{BAT} = 4.35\text{ V}$                            |  | 70  | 100 | m $\Omega$ |
| $I_{SYNC}$   | Synchronous to Non-Synchronous Current Cut-Off Threshold (Note 6) | Low-Side MOSFET (Q2)<br>Cycle-by-Cycle Current Limit |  | 180 |     | mA         |

### CHARGER PWM MODULATOR

|           |                      |  |     |     |     |     |
|-----------|----------------------|--|-----|-----|-----|-----|
| $f_{SW}$  | Oscillator Frequency |  | 2.7 | 3.0 | 3.3 | MHz |
| $D_{MAX}$ | Maximum Duty Cycle   |  |     |     | 100 | %   |
| $D_{MIN}$ | Minimum Duty Cycle   |  |     | 0   |     | %   |

### BOOST MODE OPERATION (OPA\_MODE=1)

|                  |   |  |      |      |      |               |
|------------------|---|--|------|------|------|---------------|
| $V_{BOOST}$      | Boost Output Voltage at VBUS                | $2.5\text{ V} < V_{BAT} < 4.5\text{ V}$ ,<br>$I_{LOAD}$ from 0 to 200 mA | 4.80 | 5.07 | 5.20 | V             |
|                  |   | $3.0\text{ V} < V_{BAT} < 4.5\text{ V}$ ,<br>$I_{LOAD}$ from 0 to 500 mA | 4.77 | 5.07 | 5.20 |               |
| $I_{BAT(BOOST)}$ | Boost Mode Quiescent Current                | PFM Mode, $V_{BAT} = 3.6\text{ V}$ , $I_{LOAD} = 0\text{ A}$             |      | 250  | 350  | $\mu\text{A}$ |
| $I_{LIMPK(BST)}$ | Q2 Peak Current Limit                       |  | 1550 | 1800 | 2100 | mA            |
| $UVLO_{BST}$     | Minimum Battery Voltage for Boost Operation | While Boost Active   |      | 2.32 |      | V             |
|                  |   | To Start Boost Regulator   |      | 2.48 | 2.70 |               |

### VBUS LOAD RESISTANCE

|            |                         |                  |  |     |  |            |
|------------|-------------------------|------------------|--|-----|--|------------|
| $R_{VBUS}$ | VBUS to PGND Resistance | Normal Operation |  | 500 |  | k $\Omega$ |
|            |                         | VBUS Validation  |  | 100 |  | $\Omega$   |

### PROTECTION AND TIMERS

|                  |                                       |                                 |      |      |      |                  |
|------------------|---------------------------------------|---------------------------------|------|------|------|------------------|
| $V_{BUSOV P}$    | VBUS Over-Voltage Shutdown            | $V_{BUS}$ Rising                | 6.09 | 6.29 | 6.49 | V                |
|                  | Hysteresis                            | $V_{BUS}$ Falling               |      | 100  |      | mV               |
| $I_{LIMPK(CHG)}$ | Q1 Cycle-by-Cycle Peak Current Limit  | Charge Mode                     |      | 3    |      | A                |
| $V_{SHORT}$      | Battery Short-Circuit Threshold       | $V_{BAT}$ Rising                | 1.95 | 2.00 | 2.07 | V                |
|                  | Hysteresis                            |                                 |      | 100  |      | mV               |
| $I_{SHORT}$      | Linear Charging Current               | $V_{BAT} < V_{SHORT}$           |      | 30   |      | mA               |
| $T_{SHUTDWN}$    | Thermal Shutdown Threshold (Note 4)   | $T_J$ Rising                    |      | 145  |      | $^\circ\text{C}$ |
|                  | Hysteresis (Note 4)                   | $T_J$ Falling                   |      | 25   |      |                  |
| $T_{CF}$         | Thermal Regulation Threshold (Note 4) | Charge Current Reduction Begins |      | 120  |      | $^\circ\text{C}$ |
| $t_{INT}$        | Detection Interval                    |                                 |      | 2    |      | s                |



# FAN54063

## ELECTRICAL SPECIFICATIONS (continued)

Unless otherwise specified: according to the circuit of Figure 1; recommended operating temperature range for  $T_J$  and  $T_A$ ;  $V_{BUS} = 5.0\text{ V}$ ;  $HZ\_MODE = "0"$ ;  $OPA\_MODE = "0"$  (Charge Mode); SCL, SDA = 0 or 1.8 V; and typical values are for  $T_J = 25^\circ\text{C}$ . Min. and Max. values are not tested in production, but are determined by characterization.

| Symbol                       | Parameter                    | Conditions       | Min. | Typ. | Max. | Unit |
|------------------------------|------------------------------|------------------|------|------|------|------|
| <b>PROTECTION AND TIMERS</b> |                              |                  |      |      |      |      |
| $T_{32S}$                    | 32-Second Timer (Note 7)     | Charger Enabled  | 20.5 | 25.2 | 28.0 | s    |
|                              |                              | Charger Disabled | 18.0 | 25.2 | 34.0 |      |
| $\Delta t_{LF}$              | Low-Frequency Timer Accuracy | Charger Inactive | -23  |      | 27   | %    |

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

4. Guaranteed by design; not tested in production.
5. Negative current is current flowing from the battery to ground (discharging the battery).
6. Q2 always turns on for 60 ns, then turns off if current is below  $I_{SYNC}$ .
7. This tolerance (%) applies to all timers on the IC, including soft-start and deglitching timers.

## I<sup>2</sup>C TIMING SPECIFICATIONS Guaranteed by design.

| Symbol       | Parameter                                       | Conditions                                | Min. | Typ. | Max. | Unit          |
|--------------|---|---|------|------|------|---------------|
| $f_{SCL}$    | SCL Clock Frequency                             | Standard Mode                             |      |      | 100  | kHz           |
|              |   | Fast Mode                                 |      |      | 400  |               |
|              |   | Fast Mode Plus                            |      |      | 1000 |               |
|              |   | High-Speed Mode, $C_B \leq 100\text{ pF}$ |      |      | 3400 |               |
|              |   | High-Speed Mode, $C_B \leq 400\text{ pF}$ |      |      | 1700 |               |
| $t_{BUF}$    | Bus-free Time between STOP and START Conditions | Standard Mode                             |      | 4.7  |      | $\mu\text{s}$ |
|              |   | Fast Mode                                 |      | 1.3  |      |               |
|              |   | Fast Mode Plus                            |      | 0.5  |      |               |
| $t_{HD;STA}$ | START or Repeated START Hold Time               | Standard Mode                             |      | 4    |      | s             |
|              |   | Fast Mode                                 |      | 600  |      | ns            |
|              |   | Fast Mode Plus                            |      | 260  |      | ns            |
|              |   | High-Speed Mode                           |      | 160  |      | ns            |
| $t_{LOW}$    | SCL LOW Period                                  | Standard Mode                             |      | 4.7  |      | $\mu\text{s}$ |
|              |   | Fast Mode                                 |      | 1.3  |      | $\mu\text{s}$ |
|              |   | Fast Mode Plus                            |      | 0.5  |      | $\mu\text{s}$ |
|              |   | High-Speed Mode, $C_B < 100\text{ pF}$    |      | 160  |      | ns            |
|              |   | High-Speed Mode, $C_B < 400\text{ pF}$    |      | 320  |      | ns            |
| $t_{HIGH}$   | SCL HIGH Period                                 | Standard Mode                             |      | 4    |      | $\mu\text{s}$ |
|              |   | Fast Mode                                 |      | 600  |      | ns            |
|              |   | Fast Mode Plus                            |      | 260  |      | ns            |
|              |   | High-Speed Mode, $C_B < 100\text{ pF}$    |      | 60   |      | ns            |
|              |   | High-Speed Mode, $C_B < 400\text{ pF}$    |      | 120  |      | ns            |
| $t_{SU;STA}$ | Repeated START Setup Time                       | Standard Mode                             |      | 4.7  |      | $\mu\text{s}$ |
|              |   | Fast Mode                                 |      | 600  |      | ns            |

# FAN54063

## I<sup>2</sup>C TIMING SPECIFICATIONS Guaranteed by design. (continued)

| Symbol              | Parameter   | Conditions                               | Min.                 | Typ. | Max. | Unit |
|---------------------|---|--|----------------------|------|------|------|
|                     |   | Fast Mode Plus                           |                      | 260  |      | ns   |
|                     |   | High-Speed Mode                          |                      | 160  |      | ns   |
| t <sub>SU;DAT</sub> | Data Setup Time   | Standard Mode                            |                      | 250  |      | ns   |
|                     |   | Fast Mode                                |                      | 100  |      |      |
|                     |   | Fast Mode Plus                           |                      | 50   |      |      |
|                     |   | High-Speed Mode                          |                      | 10   |      |      |
| t <sub>HD;DAT</sub> | Data Hold Time  | Standard Mode                            | 0                    |      | 3.45 | μs   |
|                     |   | Fast Mode                                | 0                    |      | 900  | ns   |
|                     |   | Fast Mode Plus                           | 0                    |      | 450  | ns   |
|                     |   | High-Speed Mode, C <sub>B</sub> < 100 pF | 0                    |      | 70   | ns   |
|                     |   | High-Speed Mode, C <sub>B</sub> < 400 pF | 0                    |      | 150  | ns   |
| t <sub>RCL</sub>    | SCL Rise Time   | Standard Mode                            | 20+0.1C <sub>B</sub> |      | 1000 | ns   |
|                     |   | Fast Mode                                | 20+0.1C <sub>B</sub> |      | 300  |      |
|                     |   | Fast Mode Plus                           | 20+0.1C <sub>B</sub> |      | 120  |      |
|                     |   | High-Speed Mode, C <sub>B</sub> < 100 pF |                      | 10   | 80   |      |
|                     |   | High-Speed Mode, C <sub>B</sub> < 400 pF |                      | 20   | 160  |      |
| t <sub>FCL</sub>    | SCL Fall Time   | Standard Mode                            | 20+0.1C <sub>B</sub> |      | 300  | ns   |
|                     |   | Fast Mode                                | 20+0.1C <sub>B</sub> |      | 300  |      |
|                     |   | Fast Mode Plus                           | 20+0.1C <sub>B</sub> |      | 120  |      |
|                     |   | High-Speed Mode, C <sub>B</sub> < 100 pF |                      | 10   | 40   |      |
|                     |   | High-Speed Mode, C <sub>B</sub> < 400 pF |                      | 20   | 80   |      |
| t <sub>RCL1</sub>   | Rise Time of SCL after a Repeated START Condition and after ACK Bit | High-Speed Mode, C <sub>B</sub> < 100 pF |                      | 10   | 80   | ns   |
|                     |   | High-Speed Mode, C <sub>B</sub> < 400 pF |                      | 20   | 160  |      |
| t <sub>RDA</sub>    | SDA Rise Time   | Standard Mode                            | 20+0.1C <sub>B</sub> |      | 1000 | ns   |
|                     |   | Fast Mode                                | 20+0.1C <sub>B</sub> |      | 300  |      |
|                     |   | Fast Mode Plus                           | 20+0.1C <sub>B</sub> |      | 120  |      |
|                     |   | High-Speed Mode, C <sub>B</sub> < 100 pF |                      | 10   | 80   |      |
|                     |   | High-Speed Mode, C <sub>B</sub> < 400 pF |                      | 20   | 160  |      |
| t <sub>FDA</sub>    | SDA Fall Time   | Standard Mode                            | 20+0.1C <sub>B</sub> |      | 300  | ns   |
|                     |   | Fast Mode                                | 20+0.1C <sub>B</sub> |      | 300  |      |
|                     |   | Fast Mode Plus                           | 20+0.1C <sub>B</sub> |      | 120  |      |
|                     |   | High-Speed Mode, C <sub>B</sub> < 100 pF |                      | 10   | 80   |      |
|                     |   | High-Speed Mode, C <sub>B</sub> < 400 pF |                      | 20   | 160  |      |
| t <sub>SU;STO</sub> | Stop Condition Setup Time   | Standard Mode                            |                      | 4    |      | μs   |
|                     |   | Fast Mode                                |                      | 600  |      | ns   |
|                     |   | Fast Mode Plus                           |                      | 120  |      | ns   |
|                     |   | High-Speed Mode                          |                      | 160  |      | ns   |
| C <sub>B</sub>      | Capacitive Load for SDA and SCL                                     |  |                      |      | 400  | pF   |

Timing Diagrams


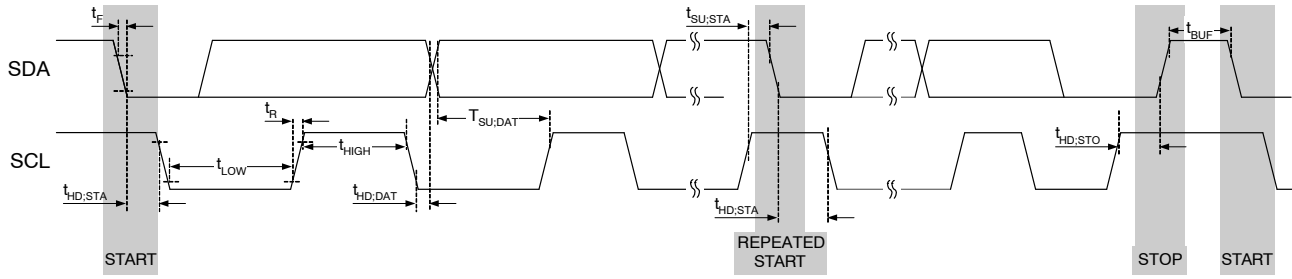


Figure 5. I<sup>2</sup>C Interface Timing for Fast and Slow Modes

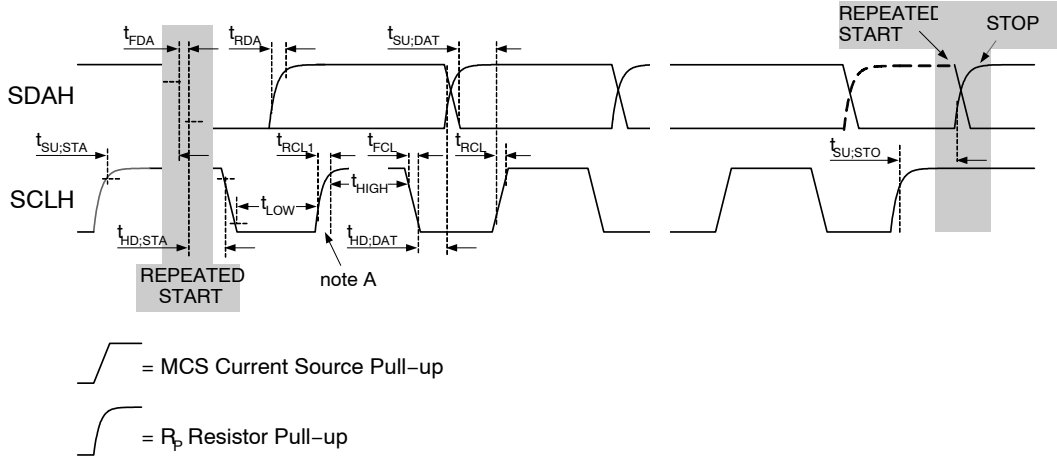

Note A: First rising edge of SCLH after Repeated Start and after each ACK bit.

Figure 6. I<sup>2</sup>C Interface Timing for High-Speed Mode

CHARGE MODE TYPICAL CHARACTERISTICS

Unless otherwise specified, circuit of Figure 1,  $V_{OREG} = 4.35\text{ V}$ ,  $I_{OCHARGE} = 950\text{ mA}$ ,  $I_{O\_LEVEL} = 0$ ,  $V_{BUS} = 5.0\text{ V}$ , and  $T_A = 25^\circ\text{C}$ .

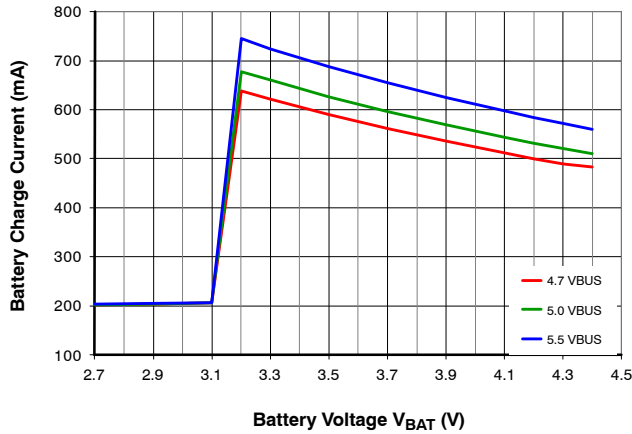


Figure 7. Battery Charge Current vs.  $V_{BUS}$  with  $I_{BUSLIM} = 500\text{ mA}$

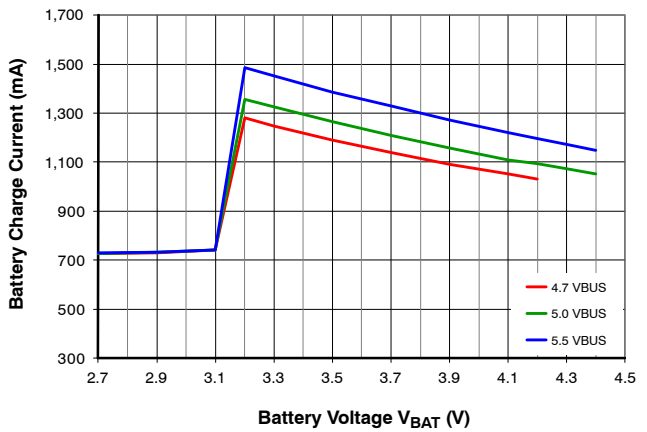


Figure 8. Battery Charge Current vs.  $V_{BUS}$  with  $I_{BUSLIM} = 1100\text{ mA}$ ,  $I_{OCHRG} = 1550\text{ mA}$

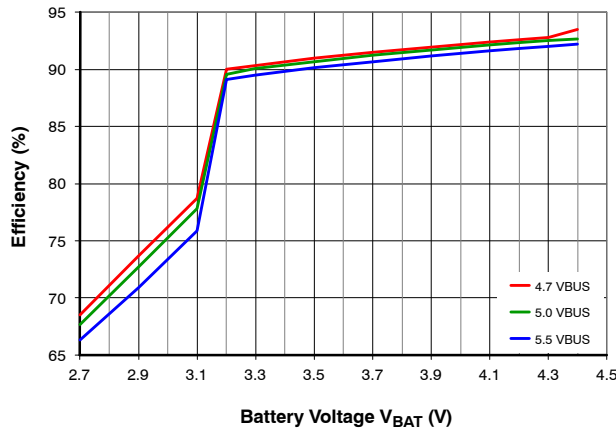


Figure 9. Efficiency vs.  $V_{BUS}$ ,  $I_{BUSLIM} = 500\text{ mA}$ ,  $I_{SYS} = 0$

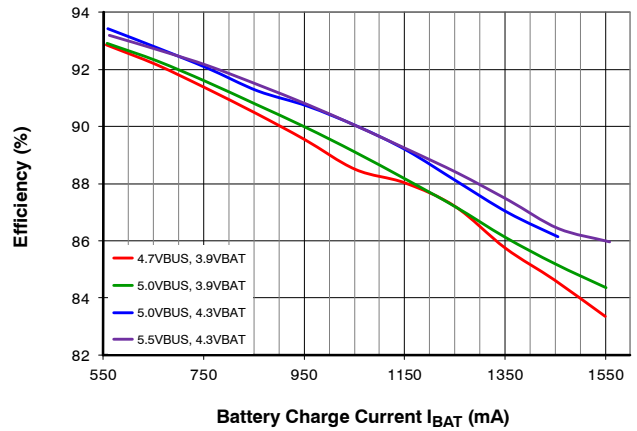


Figure 10. Efficiency vs. Charging Current,  $I_{BUSLIM} = \text{No Limit}$

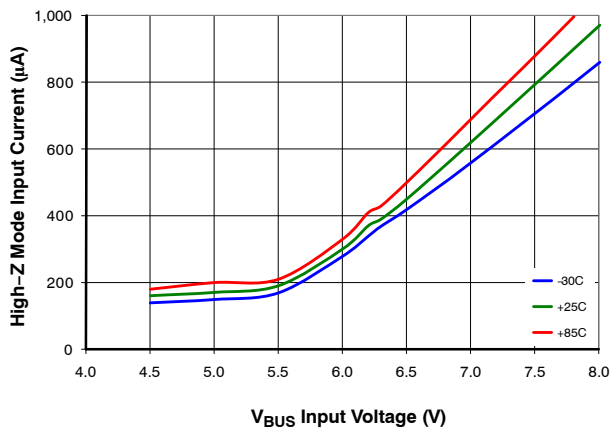


Figure 11. HZ Mode  $V_{BUS}$  Current vs. Temperature,  $3.7\text{ V}_{BAT}$

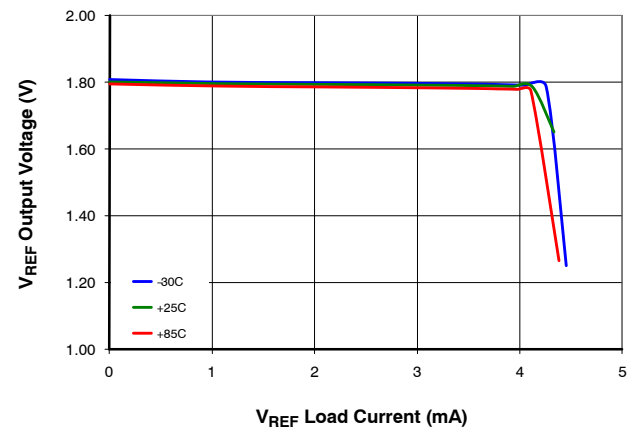


Figure 12.  $V_{REF}$  vs. Load Current, Over Temperature

CHARGE MODE TYPICAL CHARACTERISTICS

Unless otherwise specified circuit of Figure 1,  $V_{OREG} = 4.34\text{ V}$ ,  $I_{OCHARGE} = 950\text{ mA}$ ,  $IO\_LEVEL = 0$ ,  $V_{BUS} = 5.0\text{ V}$ , and  $T_A = 25^\circ\text{C}$

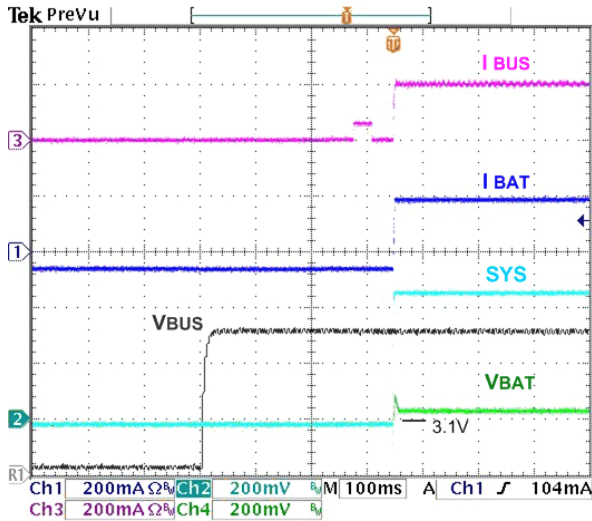


Figure 13. Charger Startup at  $V_{BUS}$  Plug-In, 500 mA  $I_{BUSLIM}$ , 3.1  $V_{BAT}$ , 50  $\Omega$  SYS Load, CE# = 0, IO\_LEVEL = 1

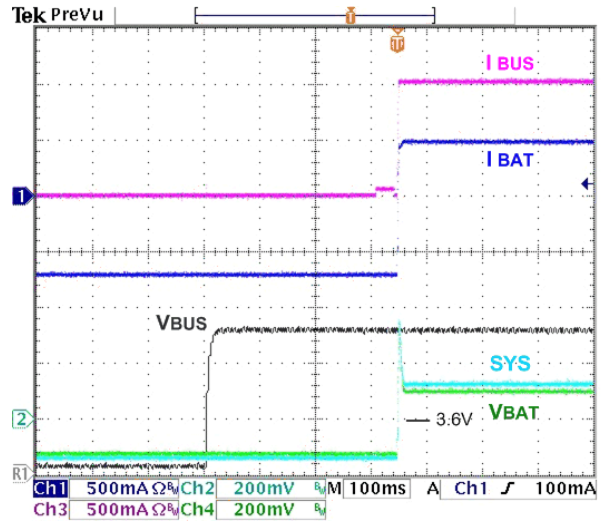


Figure 14. Charger Startup at  $V_{BUS}$  Plug-In, 1100 mA  $I_{BUSLIM}$ , 3.6  $V_{BAT}$ , 700 mA SYS Load, CE# = 0, IO\_LEVEL = 0

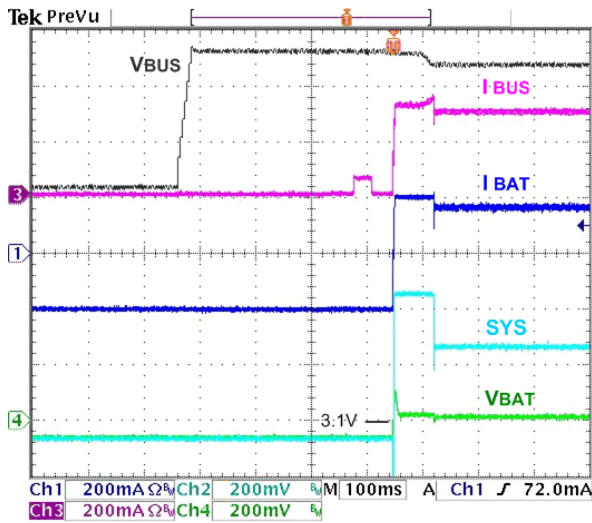


Figure 15. Charger Startup at  $V_{BUS}$  Plug-In Using 300 mA Current Limited Source, 500 mA  $I_{BUSLIM}$ , 3.1  $V_{BAT}$ , 200 mA SYS Load, CE# = 0, IO\_LEVEL=0

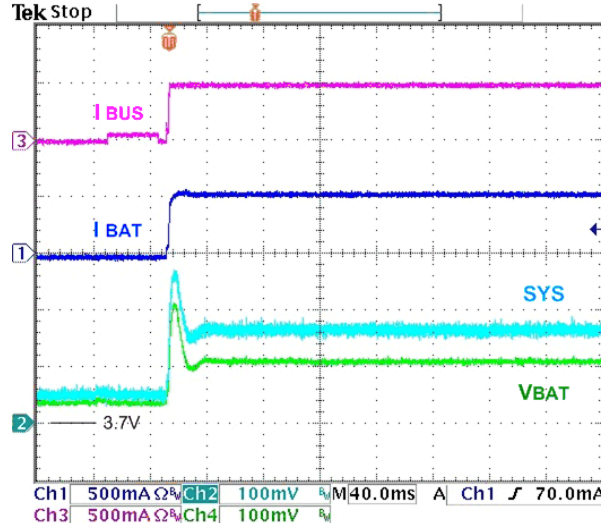


Figure 16. Charger Startup with HZ Bit Reset, 500 mA  $I_{BUSLIM}$ , 950 mA  $I_{CHARGE}$ , 50  $\Omega$  SYS Load, CE# = 0

CHARGE MODE TYPICAL CHARACTERISTICS

Unless otherwise specified circuit of Figure 1,  $V_{OREG} = 4.34\text{ V}$ ,  $I_{OCHARGE} = 950\text{ mA}$ ,  $IO\_LEVEL = 0$ ,  $V_{BUS} = 5.0\text{ V}$ , and  $T_A = 25^\circ\text{C}$

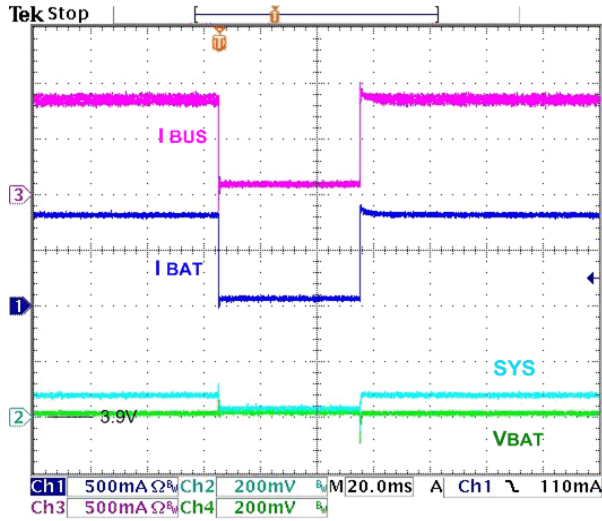


Figure 19. Battery Removal / Insertion while Charging, TE = 0, 3.9 V<sub>BAT</sub>, I<sub>CHRG</sub> = 950 mA, I<sub>BUSLIM</sub> = No Limit, 50 Ω SYS Load

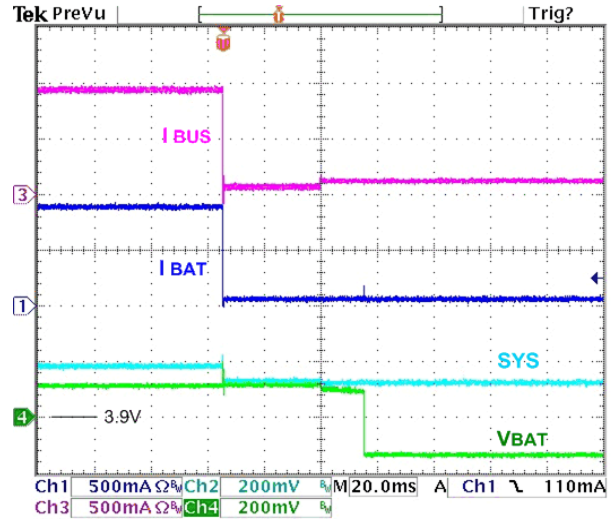


Figure 20. Battery Removal / Insertion when Charging, TE = 1, 3.9 V<sub>BAT</sub>, I<sub>BUSLIM</sub> = No Limit, 50 Ω SYS Load

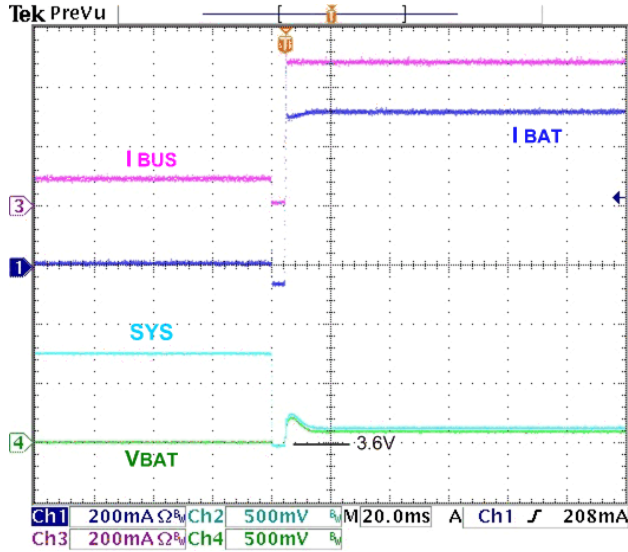


Figure 17. Charger Enable (CE# = 1 to 0) with V<sub>BUS</sub> Applied, I<sub>BUSLIM</sub> = 500 mA, 200 mA SYS Load, IO\_LEVEL = 0


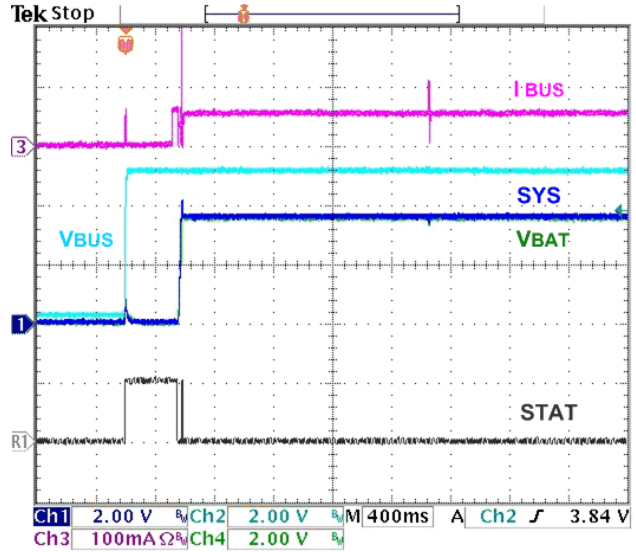



Figure 18. No Battery at V<sub>BUS</sub> Power-Up, 100 Ω SYS Load, 1 kΩ V<sub>BAT</sub> Load

**GSM TYPICAL CHARACTERISTICS**

A 2.0 A GSM pulse applied at  $V_{BAT}$  with 5 ms rise / fall time. Simultaneous to GSM pulse, 50Ω additional load applied at SYS

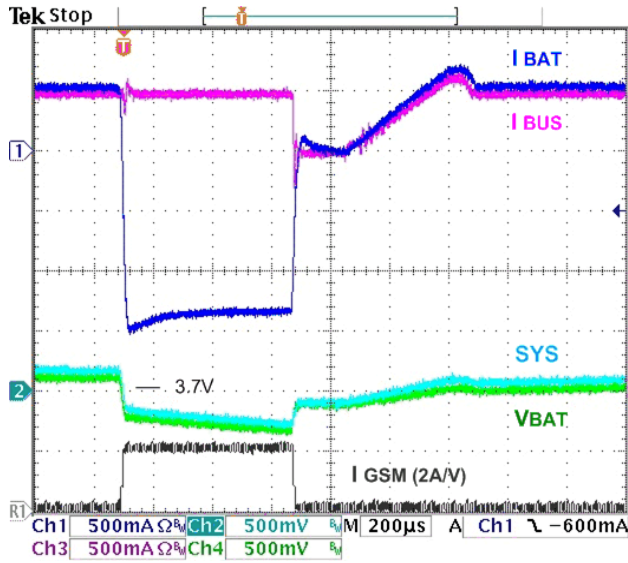


**Figure 21. 2.0 A GSM Pulse Response,  $I_{BUSLIM} = 500\text{ mA}$   
Control,  $I_{CHRG} = 950\text{ mA}$ ,  $3.7\text{ V}_{BAT}$ ,  $O_{REG} = 4.35\text{ V}$**

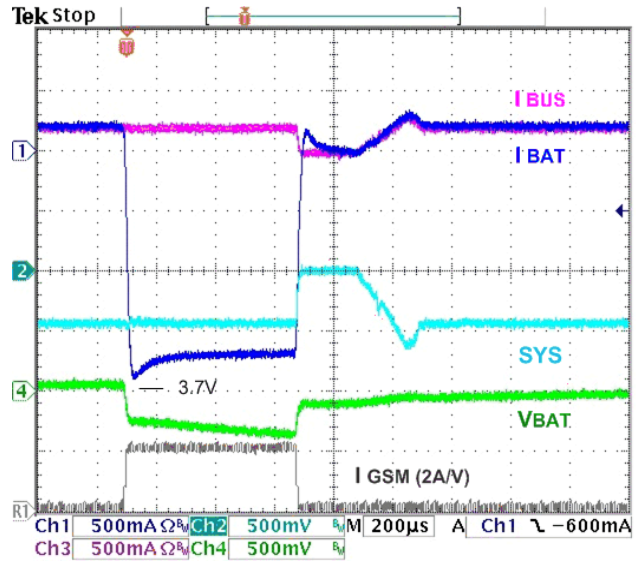


**Figure 22. 2.0 A GSM Pulse Response,  $I_{BUSLIM} = 500\text{ mA}$ ,  
 $I_{CHRG} = 950\text{ mA}$ ,  $3.7\text{ V}_{BAT}$ ,  $O_{REG} = 4.35\text{ V}$ ,  
200 mA Source Current Limit**

**BOOST MODE TYPICAL CHARACTERISTICS**


Unless otherwise specified, using circuit of Figure 1 with optional external PMOS,  $V_{BAT} = 3.6\text{ V}$ ,  $T_A = 25^\circ\text{C}$ .

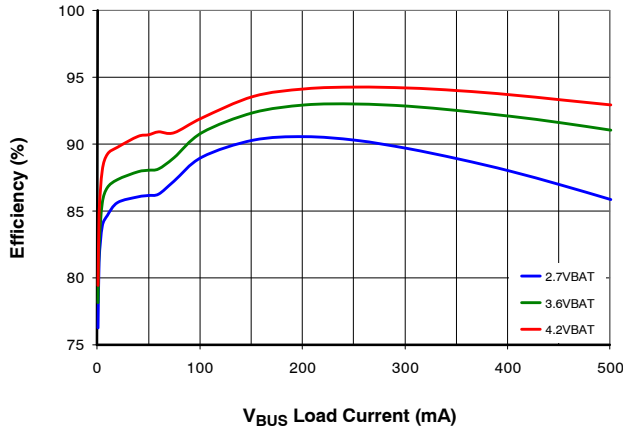


**Figure 23. Efficiency vs.  $I_{BUS}$  over  $V_{BAT}$**

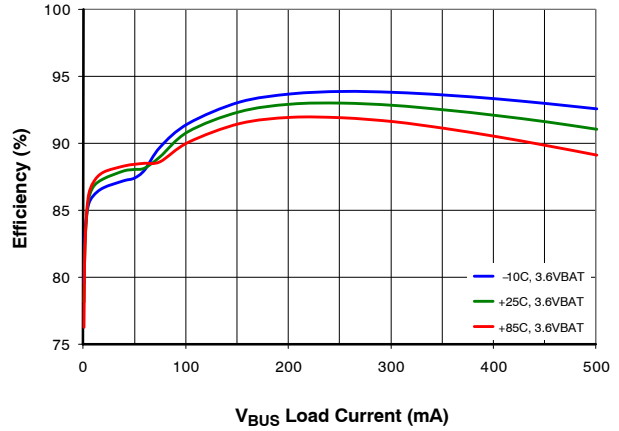


**Figure 24. Efficiency vs.  $I_{BUS}$  Over-Temperature,  $3.6\text{ V}_{BAT}$**

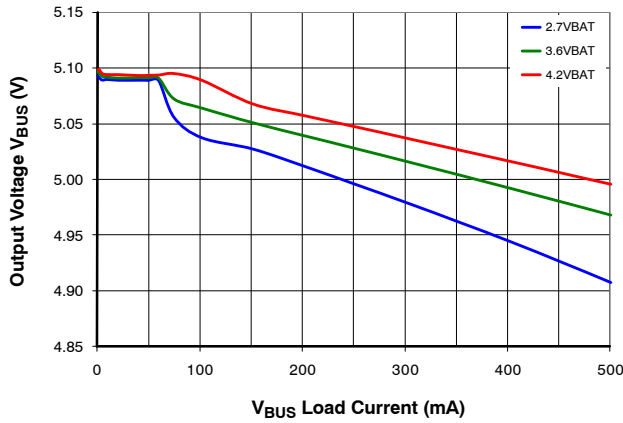


**Figure 25. Regulation vs.  $I_{BUS}$  over  $V_{BAT}$**

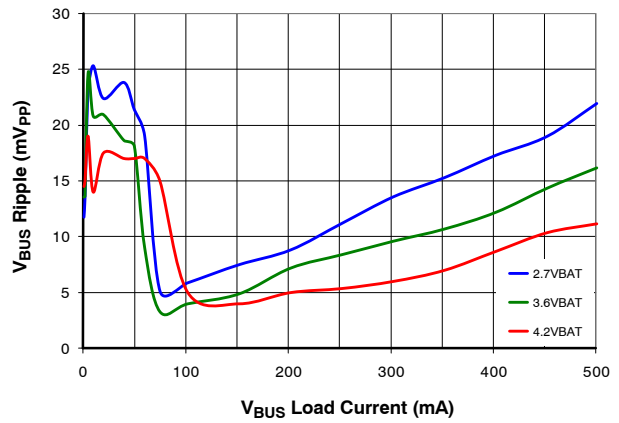

**Figure 26. Output Ripple vs.  $I_{BUS}$  over  $V_{BAT}$**

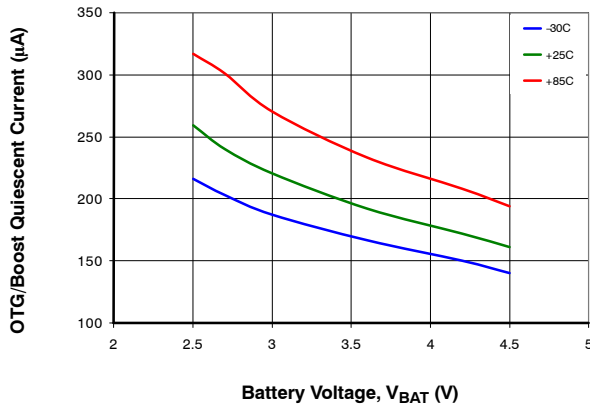

**Figure 27. Quiescent Current ( $I_Q$ ) vs.  $V_{BAT}$  Over-Temperature**

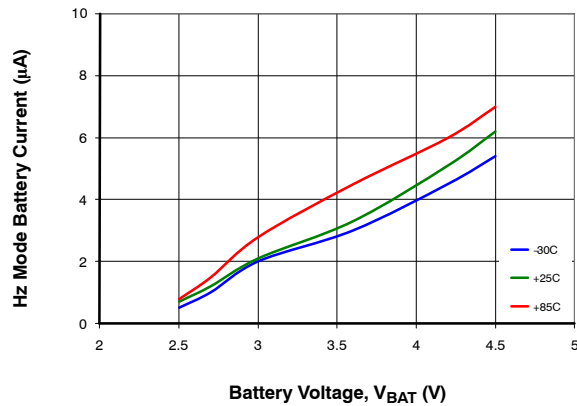

**Figure 28. Battery Discharge Current vs.  $V_{BAT}$ , Hz/ Sleep Mode**



**BOOST MODE TYPICAL CHARACTERISTICS**

Unless otherwise specified, using circuit of Figure 1 with optional external PMOS,  $V_{BAT} = 3.6\text{ V}$ ,  $T_A = 25^\circ\text{C}$ .

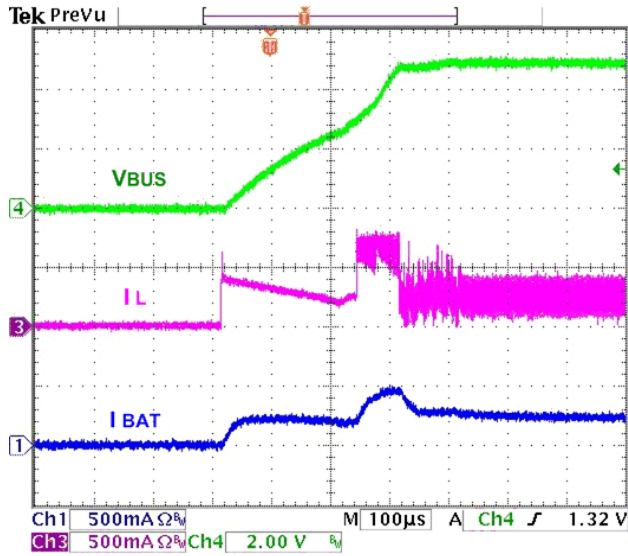


Figure 29. OTG Startup, 50  $\Omega$  Load, 3.6  $V_{BAT}$   
External / Additional 10  $\mu\text{F}$  on  $V_{BUS}$

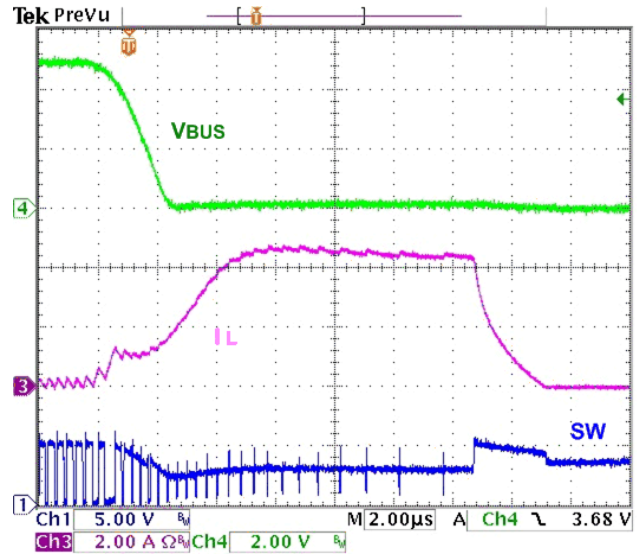


Figure 30. OTG  $V_{BUS}$  Overload Response

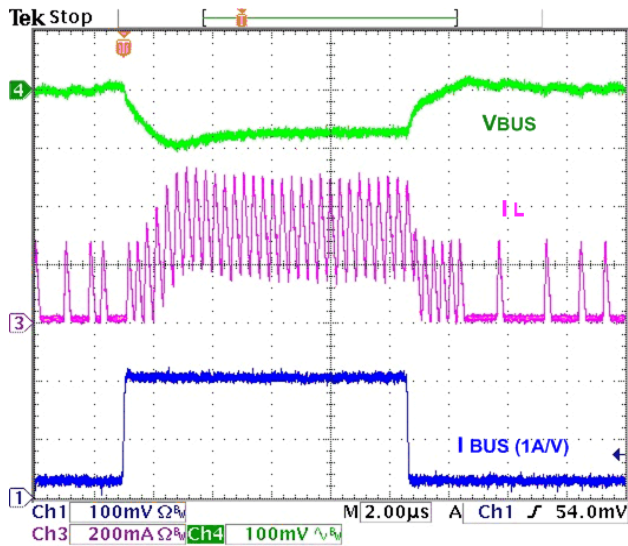


Figure 31. Load Transient, 20–200–20 mA  $I_{BUS}$ ,  
 $t_{RISE/FALL} = 100\text{ ns}$

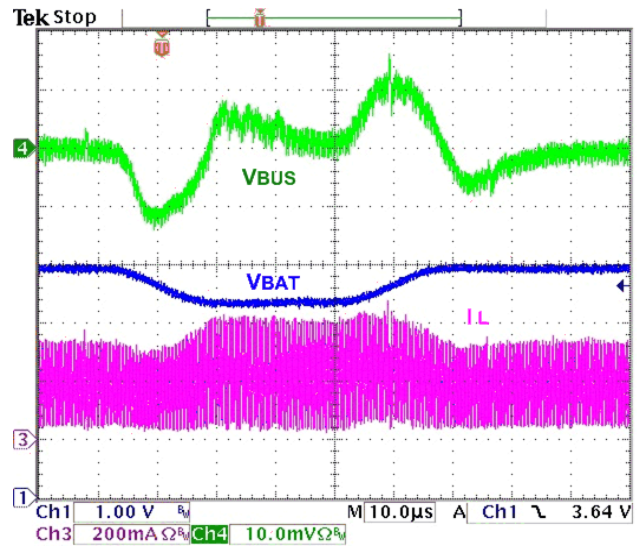


Figure 32. Line Transient, 50  $\Omega$  Load,  
3.9–3.3–3.9  $V_{BAT}$ ,  $t_{RISE/FALL} = 10\ \mu\text{s}$

**CIRCUIT DESCRIPTION / OVERVIEW**

When charging batteries with a current-limited input source, such as USB, a switching charger’s high efficiency over a wide range of output voltages minimizes charging time.

FAN54063 combines a highly integrated synchronous buck regulator for charging with a synchronous boost regulator, which can supply 5 V to USB On-The-Go (OTG) peripherals. The FAN54063 employs synchronous rectification for both the charger and boost regulators to maintain high efficiency over a wide range of battery voltages and charge states.

The FAN54063 has four operating modes:

1. Charge Mode:  
Charges a single-cell Li-ion or Li-polymer battery
2. Boost Mode:  
Provides 5 V power to USB-OTG with an integrated synchronous rectification boost regulator, using the battery as input
3. High-Impedance Mode:  
Both the boost and charging circuits are OFF in this mode. Current flow from VBUS to the battery or from the battery to VBUS is blocked in this mode. This mode consumes very little current from VBUS or the battery
4. Production Test Mode:  
This mode provides 4.2 V output on VBAT and supplies a load current of up to 2.3 A

**CHARGE MODE AND REGISTERS**

**Charge Mode**

In Charge Mode, FAN54063 employs six regulation loops:

1. Input Current: Limits the amount of current drawn from VBUS. This current is sensed internally and can be programmed through the I<sup>2</sup>C interface
2. Charging Current: Limits the maximum charging current. This current is sensed using an internal sense MOSFET
3. VBUS Voltage: This loop is designed to prevent the input supply from being dragged below VBUSLIM (typically 4.5 V) when the input power source is current limited. An example of this would be a travel charger. This loop cuts back the current when VBUS approaches VBUSLIM, allowing the input source to run in current limit
4. Charge Voltage: The regulator is restricted from exceeding this voltage. As the internal battery voltage rises, the battery’s internal impedance works in conjunction with the charge voltage regulation to decrease the amount of current

flowing to the battery. Battery charging is completed when the current through Q4 drops below the I<sub>TERM</sub> threshold

5. Pre-charge: When V<sub>BAT</sub> is below V<sub>BATMIN</sub>, Q4 operates as a linear current source and modulates its current to ensure that the voltage on SYS stays above 3.4 V
6. Temperature: If the IC’s junction temperature reaches 120°C, charge current is reduced until the IC’s temperature is below 120°C

**PWM Controller in Charge Mode**


The IC uses a current-mode PWM controller to regulate the output voltage and battery charge currents. The synchronous rectifier (Q2) has a negative current limit that turns off Q2 at 180 mA to prevent current flow from the battery.

**Battery Charging Curve**

If the battery voltage is below V<sub>SHORT</sub>, a linear current source pre-charges the battery until V<sub>BAT</sub> reaches V<sub>SHORT</sub>. The PWM charging circuit is then started and the battery is charged with a constant current if sufficient input power is available. The current slew rate is limited to prevent overshoot.

During the current regulation phase of charging, I<sub>BUSLIM</sub> or the programmed charging current limits the amount of current available to charge the battery and power the system.

During the voltage regulation phase of charging, assuming that V<sub>OREG</sub> is programmed to the cell’s fully charged “float” voltage, the current that the battery accepts with the PWM regulator limiting its output (sensed at V<sub>BAT</sub>) to V<sub>OREG</sub> declines.

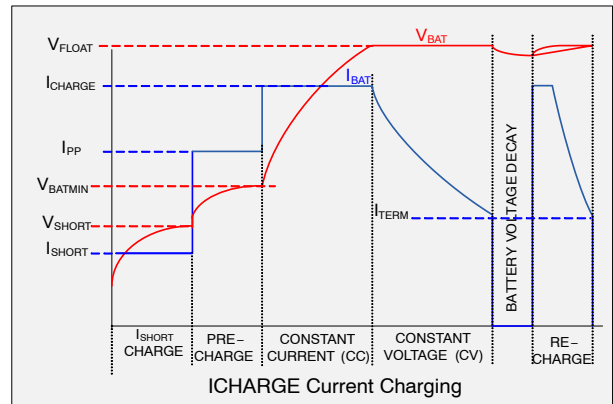

**Figure 33. Charge Curve, I<sub>CHARGE</sub> Not Limited by I<sub>BUSLIM</sub>**

The FAN54063 is designed to work with a current-limited input source at VBUS as shown below:

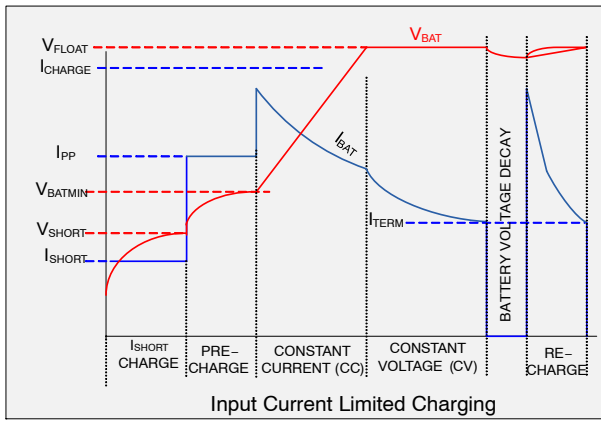


Figure 34. Charge Curve,  $I_{BUSLIM}$  Limits  $I_{CHARGE}$

The following charging parameters can be programmed by the host through I<sup>2</sup>C:

Table 3. PROGRAMMABLE CHARGING PARAMETERS

| Parameter                      | Name          | Register   |
|--------------------------------|---------------|------------|
| Output Voltage Regulation      | $V_{OREG}$    | REG02[7:2] |
| Battery Charging Current Limit | $I_{OCHARGE}$ | REG04[6:3] |
| Input Current Limit            | $I_{BUSLIM}$  | REG01[7:6] |
| Charge Termination Limit       | $I_{TERM}$    | REG04[2:0] |
| Weak Battery Voltage           | $V_{LOWV}$    | REG01[5:4] |

#### Output Voltage Regulation ( $V_{OREG}$ )

The charger output or “float” voltage can be programmed by the OREG (REG02[7:2]) bits from 3.51 V to 4.45 V in 20 mV increments. The default setting is 3.55 V.

See OREG Register Bit Definitions.(Table 17)

#### Battery Charging Current Limit ( $I_{OCHARGE}$ )

When the IO\_LEVEL bit is set (default), the IOCHARGE bits are ignored and charge current is set to 200 mA.

See IOCHARGE Register Bit Definitions.(Table 17)

#### Input Current Limiting ( $I_{BUSLIM}$ )

To minimize charging time without overloading VBUS current limitations, the IC’s input current limit can be programmed by the IBUSLIM (REG01[7:6]) bits.

See  $I_{BUSLIM}$  Register Bit Definitions.(Table 17)

#### Termination Limit ( $I_{TERM}$ )

Charge current termination can be enabled or disabled using the TE (REG01[3]) bit. By default TE = “0”, therefore, termination is disabled and charging does not terminate at the programmed  $I_{TERM}$  level.

When TE = “1”, and  $V_{BAT}$  reaches  $V_{OREG}$ , the charging current is reduced, limited by the battery’s ESR and its internal cell voltage. When the charge current falls below  $I_{TERM}$ ; PWM charging stops; but the STAT pin remains LOW. The STAT pin then goes HIGH and the STAT bits change to CHARGE DONE (10), provided the battery and charger are still connected. If  $V_{BAT}$  falls to  $V_{RCH}$  below  $V_{OREG}$ , the Fast Charge cycle starts again.

Post-charging can be enabled to “top-off” the battery to a lower termination current threshold than  $I_{TERM}$ . The PC\_EN bit (REG07[3]) must be set to “1” before the battery charging current reaches  $I_{TERM}$ . The lower termination current is set by the PC\_IT (REG07[2:0]) bits. Post-charging begins after normal charging is ended (as described above) with the PC\_ON (REG11[2]) monitor bit set to “1”.

During post-charging, the STAT pin is HIGH, indicating that the charge current is below the  $I_{TERM}$  level. Once the current reaches the threshold for post-charging completion (set by the PC\_IT bits), PWM charging stops and the PC\_ON bit changes back to “0”. If the charging current goes above  $I_{TERM}$  without first falling to PC\_IT, the PC\_ON bit can be reset by using any of these methods:  $V_{BAT}$  moving below and above  $V_{BATMIN}$ , a VBUS POR, or the CE# or HZ\_MODE bit cycled. If  $V_{BAT}$  falls to  $V_{RCH}$  below  $V_{OREG}$ , the Fast Charge cycle starts again.

See ITERM Register Bit Definitions.(Table 17)

#### Weak Battery Voltage ( $V_{LOWV}$ )

The FAN54063 monitors the level of the battery with respect to a programmable  $V_{LOWV}$  (REG01<5:4>) threshold (default 3.7 V).  $V_{LOWV}$  defines the voltage level of the battery at which the system is guaranteed to be fully operational when only powered by the battery.

The POK\_B pin pulls LOW once  $V_{BAT}$  reaches  $V_{LOWV}$ , and remains LOW as long as the IC is in Fast Charge. The IC will remain in Fast Charge as long as  $V_{BAT} > 3.0$  V.

See  $V_{LOWV}$  Register Bit Definitions.(Table 17)

#### VBUS Control loop ( $V_{BUSLIM}$ )

The IC includes a control loop that limits input current in case a current-limited source is supplying  $V_{BUS}$ .

The control increases the charging current until either:

- $I_{BUSLIM}$  or  $I_{OCHARGE}$  limit is reached OR
- $V_{BUS} = V_{BUSLIM}$

If  $V_{BUS}$  collapses to  $V_{BUSLIM}$ , the VBUS loop reduces its current to keep  $V_{BUS} = V_{BUSLIM}$ . When the VBUS control loop is limiting the charge current, the VLIM bit (REG05[3]) is set.

See  $V_{BUSLIM}$  Register Bit Definitions.(Table 17)

## CHARGER OPERATION

### VBUS Plug In and Safety Timer

At VBUS plug in, the TMR\_RST (Reg00[7]) bit must be set within 2 seconds of  $V_{BUS}$  rising above  $V_{(INMIN)1}$  or all registers, except for SAFETY (REG06), are set to their default values. This functionality occurs regardless of the state of the CE# and WD\_DIS bit. If plug in occurs with the device in a HZ or Charge Done state and the TMR\_RST bit is not set within 2 seconds of  $V_{BUS}$  rising above  $V_{(INMIN)1}$ , all register, except for SAFETY, will reset when the device enters PWM Charging or Recharge.

By default, the safety timers do not run in the FAN54063. A Watchdog ( $t_{32s}$ ) timer can be enabled by setting the WD\_DIS register bit, (REG13[1]) to “0”. When WD\_DIS = “0”, charging is controlled by the host with the  $t_{32s}$  timer running to ensure that the host is alive. Setting the TMR\_RST bit resets the  $t_{32s}$  timer. If the  $t_{32s}$  timer times out; all registers, except SAFETY, are set to their default values (including WD\_DIS and CE#), the FAULT bits are set to “110”, and STAT is pulsed.

### VBUS POR / Non-Compliant Charger Rejection

256 ms after VBUS is connected, the IC pulses the STAT pin and sets the VBUS\_CON bit. Before starting to supply current, the IC applies a 100  $\Omega$  load from VBUS to GND.  $V_{BUS}$  must remain above  $V_{IN(MIN)1}$  and below  $V_{BUS\_OVP}$  for  $t_{VBUS\_VALID}$  (32 ms) before the IC initiates charging or supplies power to SYS.

The VBUS validation sequence always occurs before significant current is drawn from VBUS (for example, after a VBUS OVP fault or a recharge initiation.  $t_{VBUS\_VALID}$  ensures that unfiltered 50/60 Hz chargers and other non-compliant chargers are rejected.

### USB-Friendly Boot Sequence

The FAN54063 does not automatically initiate charging at VBUS POR. Instead, prior to receiving host commands, the buck is enabled to provide power to SYS while Q4 and Q5 remain off until register bit CE# (REG01[2]) is set to “0” through the I<sup>2</sup>C interface, allowing charging through Q4.

### Startup with No Battery

The FAN54063 has Battery Absent Behavior enabled. At VBUS POR with the battery absent, the PWM will run, providing 3.55 V to the system from the input source with current limited by the default  $I_{BUSLIM}$  setting.

### Startup with a Dead Battery

At VBUSPOR, if  $V_{BAT} < V_{SHORT}$ , all registers, including the SAFETY register, are reset to their default values and the DBAT\_B (REG02[1]) bit is reset. CE# = “1”, so charging is disabled.

If the battery’s protection switch is open, the PWM will run, providing 3.55 V to the system from the input source

with current limited by the default  $I_{BUSLIM}$  setting. This allows the host processor to awaken and establish host control. Once this occurs, the host’s low level software can program the CE# bit to “0” and a linear current source closes the battery protection switch. When  $V_{BAT}$  voltage rises above  $V_{BATMIN}$  and sufficient power is available, PWM charging begins and the battery is charged through the BATFET, Q4. The IO\_LEVEL (REG05[5]) bit is set to “1” by default which limits charge current to 200 mA.

With CE# = “1” once  $V_{BAT}$  rises above  $V_{SHORT}$ , DBAT\_B is set. With CE# = “0” once  $V_{BAT}$  rises above  $V_{BATMIN}$ , DBAT\_B is set.

### Power Path Operation

As long as  $V_{BAT} < V_{BATMIN}$ , Q4 operates as a linear current source, (Precharge) with its current ( $I_{PP}$ ) limited to 200 mA when IO\_LEVEL (REG05[5]) is set to its default value of “1”. If IO\_LEVEL is set to “0” and  $I_{BUSLIM} > “01”$ , charge current is limited to 450 mA when  $I_{OCHARGE} \leq 750$  mA, and 730 mA when  $I_{OCHARGE} > 750$  mA. Providing the input current is not limited by the  $I_{BUSLIM}$  setting or the current available from the source, during precharge, the IC regulates SYS to 3.55 V and provides the  $I_{PP}$  limited current to the battery.

System power always has the highest priority when power from the buck is limited ensuring SYS does not fall below 3.4 V. This is managed by folding back the current to charge the battery until charge current is reduced to 0 A.

After  $V_{BAT}$  reaches  $V_{BATMIN}$ , Q4 fully enhances and is used as a current-sense element to limit current ( $I_{OCHARGE}$ ) per the I<sup>2</sup>C register settings. This is accomplished by limiting the PWM modulator’s current (Fast Charge). If SYS drops more than 5 mV ( $V_{THSYS}$ ) below  $V_{BAT}$  and CE# = “0”, Q4 is turned on and GATE is pulled LOW. If CE# = “1”, only GATE is forced LOW. Once SYS voltage becomes higher than  $V_{BAT}$ , GATE returns HIGH and Q4, once again, serves as the current-sense element to limit  $I_{OCHARGE}$ .

If the DIS pin is HIGH or HZ\_MODE = “1” while  $V_{BAT} > V_{LOWV}$ , Q4 is enabled and GATE is forced LOW to prevent the system from crashing. Upon entering SLEEP Mode ( $V_{BUS} < V_{BAT}$ ), Q4 is turned on and GATE is held LOW.

### Optional External Power Path Provisions

Q4 has a typical on-resistance of 70m $\Omega$ , which is sufficient for most applications. However, if high system load currents are expected, it is possible to augment Q4 with a parallel external PMOS element, connected as shown by dotted lines in Figure 2. Use of the optional external PMOS reduces the series voltage drop associated with battery discharge during SLEEP mode or supplemental mode operation. For example, the addition of onsemi’s FDMA905P can support discharge currents above 10 A.

## FAN54063

### POK\_B (see Table 4)

The POK\_B pin and the POK\_B (REG11[5]) bit are intended to provide feedback to the processor that the battery is strong enough to allow the system to fully function. Whenever the IC is operating in precharge, POK\_B is HIGH. On exiting Precharge, POK\_B remains HIGH until  $V_{BAT} > V_{LOWV}$ . REG01[5:4] sets the  $V_{LOWV}$  threshold. POK\_B pulls LOW once  $V_{BAT}$  reaches  $V_{LOWV}$ , and remains LOW as long as the IC is in Fast Charge and the IC will remain in Fast Charge as long as  $V_{BAT} > 3.0$  V. If the

battery voltage falls below 3.0 V the IC enters Precharge. If  $WD\_DIS = "0"$  and the  $t_{32S}$  timer expires during charging, the POK\_B pin will go HIGH.

The POK\_B bit can be set via I2C to change the state of the pin to HIGH. This setting of the bit and pin can be used to signal the system into a low-power state, preventing excessive loading from the system while attempting to recharge a depleted battery.

The STAT pin pulses any time the POK\_B pin and bit change states.

**Table 4. Q4, Q5, POK\_B vs. OPERATING MODE**

| Operating Mode   | V <sub>BUS</sub>                   | V <sub>BAT</sub>                              | CE# | PWM | V <sub>SYS</sub>  | Q4     | Q5  | GATE | POK_B                  |
|--|------------------------------------|---|-----|-----|-------------------|--------|-----|------|------------------------|
| <b>VBUS DISCONNECTED</b>   |                                    |   |     |     |                   |        |     |      |                        |
| OFF  | $< V_{BAT}$ OR<br>$< V_{IN(MIN)2}$ | $> V_{SHORT}$                                 | X   | OFF | $\leq V_{BAT}$    | ON     | ON  | LOW  | HIGH                   |
| <b>VBUS PLUG IN WITH BATTERY PROTECTION SWITCH OPEN</b>            |                                    |   |     |     |                   |        |     |      |                        |
| PWM  | Valid                              | OPEN  | 1   | ON  | V <sub>OREG</sub> | OFF    | OFF | HIGH | HIGH                   |
|  |                                    |   | 0   |     |                   |        |     |      | Indeterminate (Note 8) |
| 30 mA Linear Charging (Note 8)                                     | Valid                              | $< V_{SHORT}$                                 | 0   | ON  | 3.55              | OFF    | OFF | HIGH | HIGH                   |
| <b>CHARGE MODE</b>   |                                    |   |     |     |                   |        |     |      |                        |
| Precharge  | Valid                              | $> V_{SHORT}$ and<br>$< V_{BATMIN}$           | 0   | ON  | 3.55              | Linear | OFF | HIGH | HIGH                   |
| Precharge:<br>$I_{SYS} + I_{PP} > I_{PWM}$ ,<br>$I_{BAT} < I_{PP}$ | Valid                              | $< V_{BATMIN}$                                | 0   | ON  | $< 3.55$          | Linear | OFF | HIGH | HIGH                   |
| Fast Charge  | Valid                              | $> V_{BATMIN}$ and<br>$< V_{LOWV}$            | 0   | ON  | $> V_{BAT}$       | ON     | OFF | HIGH | HIGH                   |
|  |                                    | $> V_{LOWV}$                                  |     |     |                   |        |     |      | LOW                    |
| <b>BATTERY VOLTAGE FALLING FROM FAST CHARGE</b>                    |                                    |   |     |     |                   |        |     |      |                        |
| Precharge  | Valid                              | V <sub>BATFALL</sub>                          | 0   | ON  | 3.55              | ON     | OFF | HIGH | HIGH                   |
| <b>BATTERY SUPPLEMENTING SYS</b>                                   |                                    |   |     |     |                   |        |     |      |                        |
| Supplemental Mode :<br>$I_{SYS} > I_{PWM}$                         | Valid                              | $> V_{BATMIN}$ and<br>$> V_{SYS} + V_{THSYS}$ | X   | ON  | $< V_{BAT}$       | X      | ON  | LOW  | X                      |

8. When VBAT is open,  $V_{BAT}$  can float to  $V_{SYS}$ , and POK\_B = HIGH when  $V_{BAT} < V_{LOWV}$  and POK\_B = LOW when  $V_{BAT} > V_{LOWV}$ . Battery's presence or not (VBAT open) can be monitored by reading NOBAT bit (REG11[3]).

9. 30 mA Linear Charging operating mode assumes the host has programmed CE# = "0" during PWM Operating Mode.

**Charger Status / Fault Status**

The STAT pin indicates the operating condition of the IC and provides a fault indicator for interrupt driven systems.

**Table 5. STAT Pin Function**

| EN_STAT | Charge State              | STAT Pin                     |
|---------|---------------------------|------------------------------|
| 0       | X                         | OPEN                         |
| X       | Normal Conditions         | OPEN                         |
| 1       | Charging                  | LOW                          |
| X       | Fault (Charging or Boost) | 128 $\mu$ s Pulse, then OPEN |

The FAULT bits (REG00[2:0]) indicate the type of fault in Charge Mode.

**Monitor Registers (REG10, REG11)**

Additional status monitoring bits enable the host processor to have more visibility into the status of the IC. The monitor bits are real-time status indicators and are not internally debounced or otherwise time qualified.

The state of the MONITOR register bits listed in High-Impedance Mode is valid only when V<sub>BUS</sub> is valid.

**Charge Mode Control Bits**

The CE# (REG01[2]) bit is set to “1” by default, therefore, charging is disabled.

Setting the RESET (REG04[7]) bit clears all registers (except SAFETY). The CE# bit will only be cleared if RESET occurs with a valid V<sub>BUS</sub> and V<sub>BAT</sub> < V<sub>LOWV</sub>. If the HZ\_MODE bit was set when the RESET bit is set, this bit is also cleared. Refer to the Register Bit Definitions section for more details.


Setting the HZ\_MODE bit (REG01[1]) or raising the DIS pin will put the device in High-Impedance Mode, where the buck is disabled. Q4 and Q5 are enabled to prevent the system from crashing. Refer to Table 6 for details.

If the charger is in High-Impedance mode and V<sub>BAT</sub> drops below V<sub>LOWV</sub>, or High Impedance mode is entered while V<sub>BAT</sub> < V<sub>LOWV</sub>, all registers (except SAFETY), including HZ\_MODE and CE#, are reset to their default values. If WD\_DIS = “0” (REG13[1]), the register resets, including WD\_DIS, only occur if the Watch-Dog Timer (t<sub>32s</sub>) expires. If the DIS pin is HIGH, the IC will remain in High-Impedance Mode. If the DIS pin is LOW, the buck will be enabled.

**Table 6. DIS PIN, HZ\_MODE AND WD\_DIS BIT OPERATION**

| Conditions  | Functionality  |
|---|--|
| WD_DIS = 1 (default) and V <sub>BAT</sub> > V <sub>LOWV</sub> | Setting either the HZ_MODE bit through I <sup>2</sup> C or the DIS pin HIGH will disable the charger and put the IC into High-Impedance Mode.<br>Resetting the HZ_MODE bit or the DIS pin to LOW will allow charging to resume.  |
| WD_DIS = 0 and V <sub>BAT</sub> > V <sub>LOWV</sub>           | Setting either the HZ_MODE bit through I <sup>2</sup> C or the DIS pin HIGH will stop the t <sub>32s</sub> timer from advancing (does not reset it), disable the charger, and put the IC into High-Impedance Mode.<br>Resetting the HZ_MODE bit or the DIS pin LOW allows charging to resume. The t <sub>32s</sub> timer resuming counting down the remainder of time from where it was suspended, at HZ mode entry. |

FLOW CHARTS

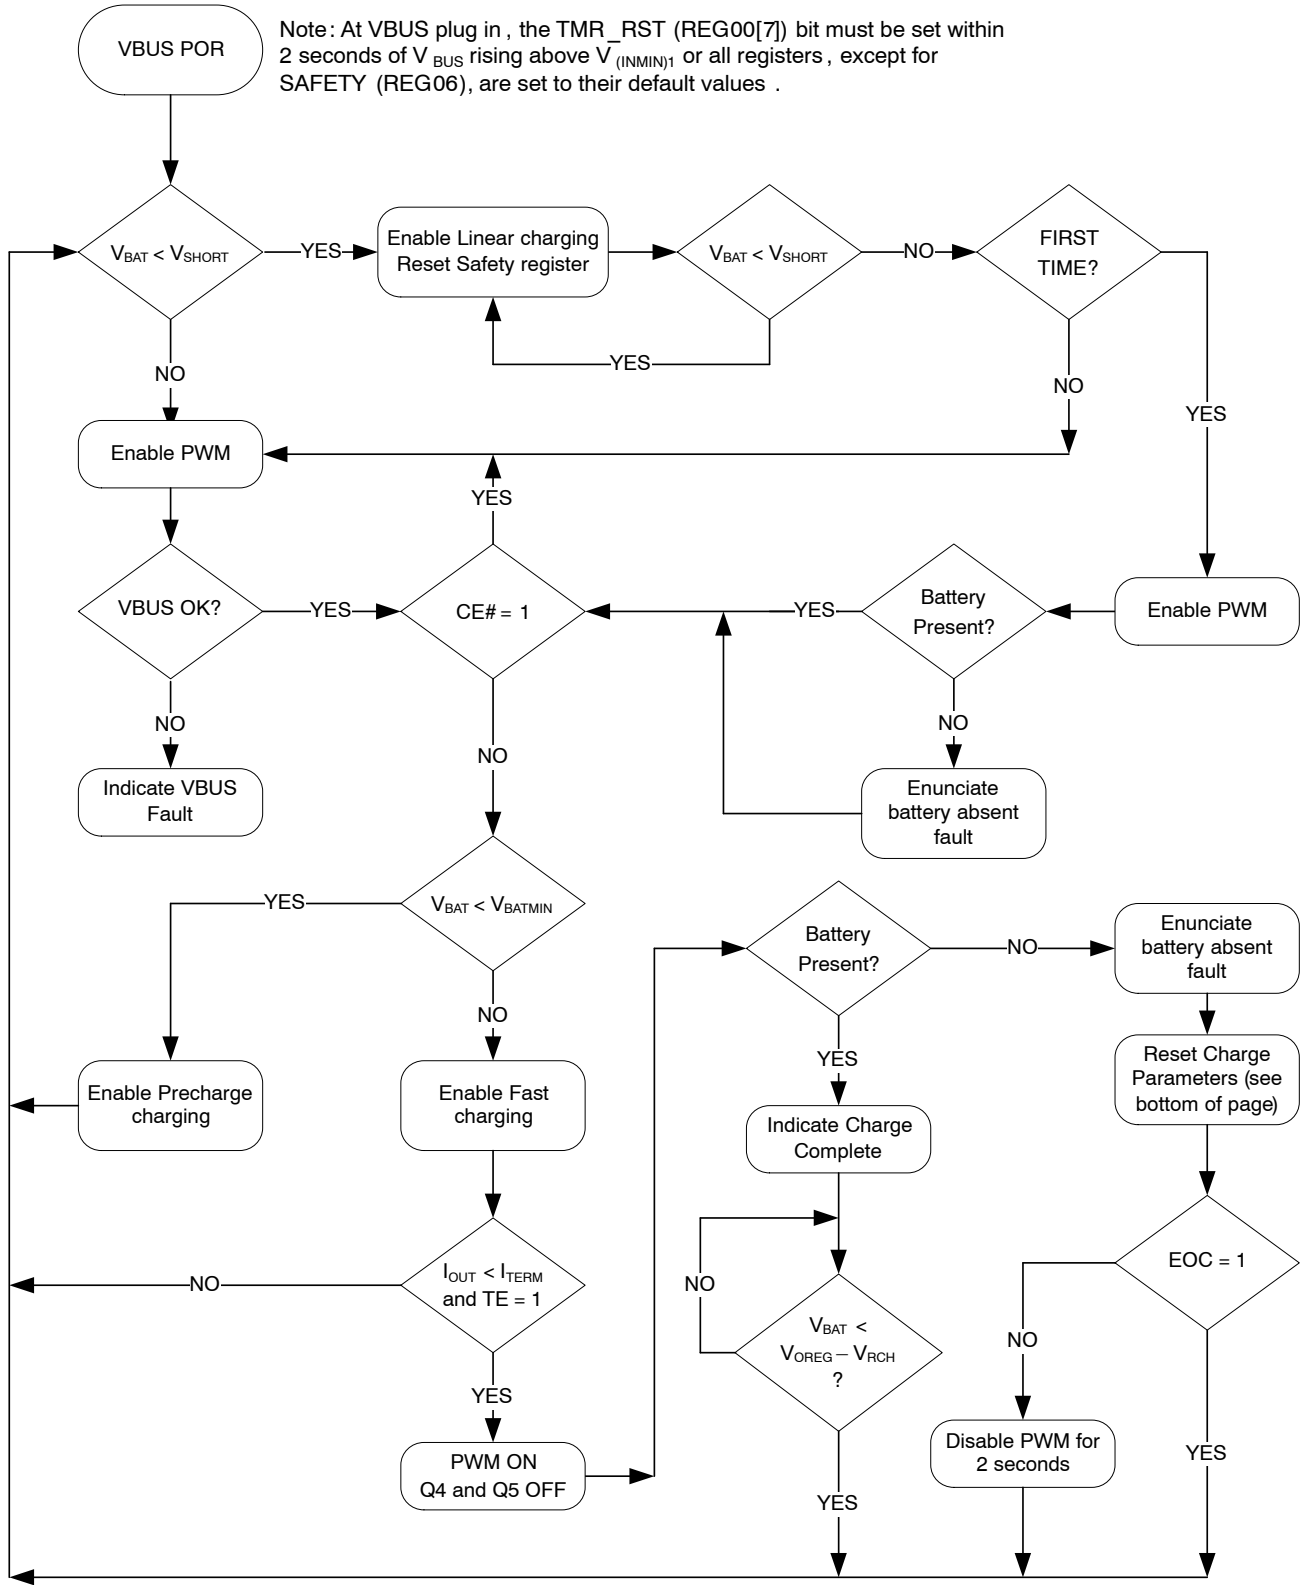

Note: Reset Charge Parameters is a condition that results in the O REG, IOCHARGE, IBUSLIM, ITERM, VLOWV, and the Safety register bits resetting. It does not reset the IO\_LEVEL, EOC, and TE register bits .

Figure 35. Charge State Flow Chart

**NON-CHARGING STATES**

**Sleep Mode**

When  $V_{BUS}$  falls below  $V_{BAT} + V_{SLP}$  and  $V_{BUS}$  is above  $V_{IN(MIN)2}$ , the IC enters Sleep Mode to prevent the battery from draining into  $V_{BUS}$ . During Sleep Mode, reverse current is disabled by body switching Q1.

**Idle State**

The Idle State is related to the condition of the battery. During Idle mode the Switch Mode Power Supply (SMPS) is operating, but the battery is not being charged for one or more of the following conditions: the Safety Timer expires (CE# reset to 1), charging is complete, or the BATFET is disabled by the Charge Enable bit, CE# = "1".

The PWM Buck continues to supply power to the system, but the Battery is no longer being charged and the BATFET is disabled.

**Standby State**

The Standby State is an intermediate state where the switch mode supply is off due to either bad input power, the device has been put in High-Impedance Mode, or the die temperature is too hot.

**CHARGER PROTECTION**

**Battery Temperature (NTC) Monitor**

The FAN54063 reduces the maximum charge current and termination voltage if an NTC measuring battery temperature ( $T_{BAT}$ ) indicates that it is outside the fast-charging limits (T2 to T3), as described in the JEITA specification<sup>1</sup>. There are four temperature thresholds that change battery charger operation: T1, T2, T3, and T4, shown below.

**Table 7. BATTERY TEMPERATURE THRESHOLDS**

For use with 10 kΩ NTC, b = 3380, and  $R_{REF} = 10\text{ k}\Omega$ .

| Threshold | Temperature | % of $V_{REF}$ |
|-----------|-------------|----------------|
| T1        | 0°C         | 73.9           |
| T2        | 10°C        | 64.6           |
| T3        | 45°C        | 32.9           |
| T4        | 60°C        | 23.3           |

**Table 8. CHARGE PARAMETERS VS.  $T_{BAT}$**

For use with 10 kΩ NTC, b = 3380, and  $R_{REF} = 10\text{ k}\Omega$ .

| $T_{BAT}$ (°C)    | $I_{CHARGE}$                   | $V_{FLOAT}$ |
|-------------------|--------------------------------|-------------|
| Below T1          | Charging to $V_{BAT}$ Disabled |             |
| Between T1 and T2 | $I_{CHARGE} / 2$ (Note 10)     | 4.0 V       |
| Between T2 and T3 | $I_{CHARGE}$                   | $V_{OREG}$  |
| Between T3 and T4 | $I_{CHARGE} / 2$ (Note 10)     | 4.0 V       |
| Above T4          | Charging to $V_{BAT}$ Disabled |             |

10. If  $I_{CHARGE}$  is programmed to less than 650 mA, the charge current is limited to 340 mA.

Thermistors with other  $\beta$  values can be used, with some shift in the corresponding temperature threshold, as shown in Table 9.

**Table 9. THERMISTOR TEMPERATURE THRESHOLDS**

$R_{REF} = R_{THRM}$  at 25°C.

| Parameter              | Various Thermistors |       |       |        |
|------------------------|---------------------|-------|-------|--------|
|                        | 10 kΩ               | 10 kΩ | 47 kΩ | 100 kΩ |
| $R_{THRM(25^\circ C)}$ | 10 kΩ               | 10 kΩ | 47 kΩ | 100 kΩ |
| $\beta$                | 3380                | 3940  | 4050  | 4250   |
| T1                     | 0°C                 | 3°C   | 6°C   | 8°C    |
| T2                     | 10°C                | 12°C  | 13°C  | 14°C   |
| T3                     | 45°C                | 42°C  | 41°C  | 40°C   |
| T4                     | 60°C                | 55°C  | 53°C  | 51°C   |

<sup>1</sup> Japan Electronics and Information Technology Industries Association (JEITA) and Battery Association of Japan. "A Guide to the Safe Use of Secondary Lithium Ion Batteries in Notebook-type Personal Computers," April 28, 2007.



The host processor can disable temperature-driven control of charging parameters by writing “1” to the TEMP\_DIS bit. Since TEMP\_DIS is reset whenever the IC resets its registers, the temperature controls are enforced whenever the IC is auto-charging, since auto-charge is always preceded by a reset of registers.

To disable the thermistor circuit, tie the NTC pin to GND. Before enabling the charger, the IC tests to see if NTC is shorted to GND. If NTC is shorted to GND, no thermistor readings occur and the NTC\_OK and NTC1–NTC4 is reset.

The IC first measures the NTC immediately prior to entering any PWM charging state, then measures the NTC once per second, updating the result in NTC1–NTC4 bits (REG 12[3:0]).

**Table 10. NTC1–NTC4 DECODING**

| T <sub>BAT</sub> (°C) | NTC4 | NTC3 | NTC2 | NTC1 |
|-----------------------|------|------|------|------|
| Above T4              | 1    | 1    | 1    | 1    |
| Between T3 and T4     | 0    | 1    | 1    | 1    |
| Between T2 and T3     | 0    | 0    | 1    | 1    |
| Between T1 and T2     | 0    | 0    | 0    | 1    |
| Below T1              | 0    | 0    | 0    | 0    |

**Safety Register Settings**

The IC contains a SAFETY register (REG06) that prevents the values of OREG (REG02[7:2]) and IOCHARGE (REG04[6:3]) from exceeding the values of VSAFE (REG06[3:0]) and ISAFE (REG06[7:4]) in the SAFETY register.

After V<sub>BAT</sub> rises above V<sub>SHORT</sub>, the SAFETY register is loaded with its default value and may be written to only before writing to any other register. The same 8-bit value should be written to the SAFETY register twice to set the register value. After writing to any other register, the SAFETY register is locked until V<sub>BAT</sub> falls below V<sub>SHORT</sub>.

If the host attempts to write a value higher than VSAFE or ISAFE to OREG or IOCHARGE, respectively; the VSAFE, ISAFE value appears as the OREG, IOCHARGE register value, respectively.

The Safety register is reset when the battery is below V<sub>SHORT</sub> and power is removed from VBUS.

See VSAFE and ISAFE Register Bit Definitions. (Table 17)

**Thermal Regulation and Shutdown**

When the IC’s junction temperature reaches T<sub>CF</sub> (about 120°C), the charger reduces its output current to 550 mA to prevent overheating. If the temperature increases beyond T<sub>SHUTDOWN</sub>; charging is suspended, the FAULT bits are set to 101, and STAT is pulsed high. In Suspend Mode, all timers stop and the state of the IC’s logic is preserved. Charging resumes at programmed current after the die cools to about 120°C.

Note that as power dissipation increases, the effective  $\theta_{JA}$  decreases due to the larger difference between the die temperature and ambient.

**Charge Mode Input Supply Protection**

*Input Supply Low–Voltage Detection*

The IC continuously monitors V<sub>BUS</sub> during charging. If V<sub>BUS</sub> falls below V<sub>IN(MIN)2</sub>, the IC:

1. Terminates charging
2. Pulses the STAT pin, sets the STAT bits to “00”, and sets the FAULT bits to “011”

If V<sub>BUS</sub> recovers above the V<sub>IN(MIN)1</sub> rising threshold after time t<sub>INT</sub> (about two seconds), the charging process is repeated. This function prevents the USB power bus from collapsing or oscillating when the IC is connected to a suspended USB port or a low-current-capable OTG device.

*Input Over–Voltage Detection*

When V<sub>BUS</sub> exceeds VBUS<sub>OVP</sub>, the IC:

1. Turns off Q3
2. Suspends charging
3. Sets the FAULT bits to “001”, sets the STAT bits to “11”, and pulses the STAT pin

When VBUS falls about 100 mV below VBUS<sub>OVP</sub>, the fault is cleared and charging resumes after VBUS is revalidated.

*SYS Short During Discharge / Supplemental Mode*

Caution should be taken to ensure the SYS pin is not shorted when connected to a battery. This condition can induce high current flow through the BATFET (Q4) and the external PMOS, if equipped, until the battery’s own safety circuit trips. The resulting high current can damage the IC.

**Charge Mode Battery Detection & Protection**

*V<sub>BAT</sub> Over-Voltage Protection*

The OREG voltage regulation loop prevents V<sub>BAT</sub> from overshooting V<sub>OREG</sub> by more than 50 mV when the battery is removed. When the PWM charger runs with no battery, the TE bit is not set and a battery is inserted that is charged to a voltage higher than V<sub>OREG</sub>; PWM pulses stop. If no further pulses occur for 30 ms, the IC sets the FAULT bits to “100”, sets the STAT bits to “11”, and pulses the STAT pin.

*Battery Detection during Charging*

The IC can detect the presence, absence, or removal of a battery if the termination bit (TE) is set to “1” and CE# = “0”. During normal charging, once V<sub>BAT</sub> is close to V<sub>OREG</sub> and the charge current falls below I<sub>TERM</sub>; the PWM charger continues to provide power to SYS and Q4 is turned off. It then turns on a discharge current, I<sub>DETECT</sub>, for t<sub>DETECT</sub>. If V<sub>BAT</sub> is still above V<sub>OREG</sub> - V<sub>RCH</sub>, the battery is present and the IC sets the STAT bits to “10” (Charge Done). If V<sub>BAT</sub> is below V<sub>OREG</sub> - V<sub>RCH</sub>, the battery is absent and the IC:

1. Sets the charging parameters to their default values
2. Sets the FAULT bits to “111” (Battery Absent) and sets the NOBAT bit
3. If EOC = “0”, the IC turns off the PWM for t<sub>INT</sub>, then resumes charging and retries Battery Detection. If the battery is still absent, the process repeats with the “No Battery” fault re-enunciated
4. If EOC = “1”, the PWM remains on to provide power to SYS, but charge termination and the battery absent test are performed every t<sub>INT</sub>

*Linear Charging*

If the battery voltage is below the short-circuit threshold (V<sub>SHORT</sub>); a linear current source, I<sub>SHORT</sub>, charges V<sub>BAT</sub> until V<sub>BAT</sub> > V<sub>SHORT</sub>.

**PRODUCTION TEST MODE (PTM)**

PTM provides 4.20 V at up to 2.3 A to V<sub>BAT</sub> when V<sub>BUS</sub> = 5.5 V ±5%.

The IC enters PTM when the PROD (REG05[6]) bit is set after the NOBAT (REG11[3]) bit has been set. The NOBAT bit indicates that the IC has detected battery absence. A battery absence detection test is performed automatically at current termination. The steps for entering PTM should include: set the TE (REG01[3]) bit high, set the CE# (REG01[2]) bit low, wait for the NOBAT bit to set HIGH, then set the PROD bit to “1” to enter PTM. Battery absence detection is completed within 500 ms from the time that CE# is set.

In PTM, the GATE bit (REG11[7]) is LOW, Q5 is on, and all auxiliary control loops are disabled. Only the OREG loop is active, which controls V<sub>BAT</sub> to 4.20 V, regardless of the OREG register setting. Thermal shutdown remains active.

During PTM, high current pulses (load currents greater than 1.5 A) must be limited to 20% duty cycle with a minimum period of 10 ms.

**BOOST MODE**

Boost Mode can be enabled by setting the OPA\_MODE REG01[0]) bit HIGH and clearing the HZ\_MODE bit.

**Table 11. ENABLING BOOST**


| HZ_MODE | OPA_MODE | BOOST    |
|---------|----------|----------|
| 0       | 1        | Enabled  |
| 1       | X        | Disabled |
| X       | 0        | Disabled |

If WD\_DIS = “0”, to remain in Boost Mode, the TMR\_RST must be set by the host before the t<sub>32S</sub> timer times out. If t<sub>32S</sub> times out in Boost Mode; the IC resets all registers, pulses the STAT pin, sets the FAULT bits to 110, and resets the BOOST bit. V<sub>BUS</sub> POR or reading REG00 clears the fault condition.

**Boost PWM Control**

The IC uses a minimum on-time and computed minimum off-time to regulate V<sub>BUS</sub>. The regulator achieves excellent transient response by employing current-mode modulation. This technique causes the regulator to exhibit a load line. The output voltage drops slightly as the output current rises. With a constant V<sub>BAT</sub>, this appears as a constant output resistance.

The “droop” caused by the output resistance when a load is applied allows the regulator to respond smoothly to load transients with no undershoot from the load line. This can be seen in Figure 31 and Figure 36.

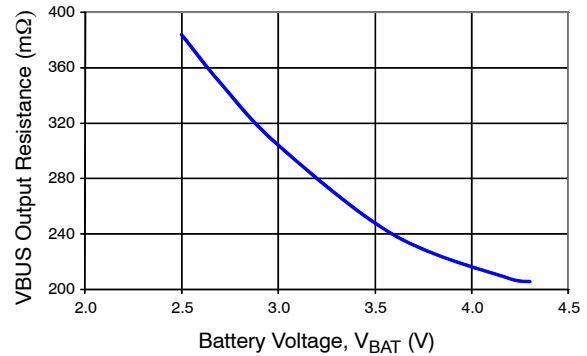

**Figure 36. Output Resistance (R<sub>OUT</sub>)**

V<sub>BUS</sub> as a function of I<sub>LOAD</sub> can be computed when the regulator is in PWM Mode (continuous conduction) as:

$$V_{OUT} = 5.07 - R_{OUT} \times I_{LOAD} \quad (\text{eq. 1})$$

At V<sub>BAT</sub> = 3.0 V and I<sub>LOAD</sub> = 300 mA, V<sub>BUS</sub> drops to:

$$V_{OUT} = 5.07 - 0.30 \times 0.3 = 4.98 \text{ V} \quad (\text{eq. 2})$$

At V<sub>BAT</sub> = 3.6 V and I<sub>LOAD</sub> = 500 mA, V<sub>BUS</sub> drops to:

$$V_{OUT} = 5.07 - 0.24 \times 0.5 = 4.95 \text{ V} \quad (\text{eq. 3})$$

**PFM Mode**

If  $V_{BUS} > V_{REF_{BOOST}}$  (nominally 5.07 V) when the minimum off-time ends, the regulator enters PFM Mode. Boost pulses are inhibited until  $V_{BUS} < V_{REF_{BOOST}}$ . The minimum on-time is increased to enable the output to pump up sufficiently with each PFM boost pulse. Therefore, the regulator behaves like a constant on-time regulator, with the bottom of its output voltage ripple at 5.07 V in PFM Mode.

**Table 12. BOOST PWM OPERATING STATES**

| Mode | Description          | Invoked When                            |
|------|----------------------|---|
| LIN  | Linear Startup       | $V_{BAT} > V_{BUS}$                     |
| SS   | Boost Soft-Start     | $V_{BUS} < V_{BST}$                     |
| BST  | Boost Operating Mode | $V_{BAT} > UVLO_{BST}$ and SS Completed |

**Startup**

When the boost regulator is shut down, current flow is prevented from  $V_{BAT}$  to  $V_{BUS}$ , as well as reverse flow from  $V_{BUS}$  to  $V_{BAT}$ .

**LIN State**

When the boost is enabled by setting  $OPA\_MODE = 1$  and  $HZ\_MODE = 0$ , if  $V_{BAT} > UVLO_{BST}$ , the regulator first attempts to bring  $PMID$  to within approximately 500 mV of  $V_{BAT}$  using an internal 1100 mA limited current source from  $V_{BAT}$ . If  $PMID$  has not achieved  $V_{BAT} - 500$  mV after 8 ms, a fault state is declared.

**SS State**

Once  $PMID > V_{BAT} - 500$  mV, Q3 begins to close, connecting  $V_{BUS}$  to  $PMID$ , and the boost regulator begins switching with a reduced peak current limit of 50% of its nominal current limit for up to 128  $\mu$ s. After the 128  $\mu$ s, the peak current limit is increased to 100%.

**Table 13. FAULT BITS DURING BOOST MODE**

| Fault Bit |    |    | Fault (REG00h[2:0]) Description  |
|-----------|----|----|--|
| B2        | B1 | B0 |  |
| 0         | 0  | 0  | Normal (no fault)  |
| 0         | 0  | 1  | $V_{BUS} > V_{BUS_{OVP}}$  |
| 0         | 1  | 0  | $V_{BUS}$ fails to achieve the voltage required to advance to the next state during soft-start or sustained ( $> 50 \mu$ s) current limit during the BST state |
| 0         | 1  | 1  | $V_{BAT} < UVLO_{BST}$   |
| 1         | 0  | 0  | NA: This code does not appear  |
| 1         | 0  | 1  | Thermal shutdown   |
| 1         | 1  | 0  | Timer fault; all registers reset   |
| 1         | 1  | 1  | NA: This code does not appear  |

If the output fails to achieve 95% of its setpoint within 4 ms, while the peak current limit is 100%, a restart cycle is initiated. Up to 15 restart attempts will be made before a fault is declared.

Once the voltage reaches 95%, the device begins to increment the voltage in 50 mV steps, every 512  $\mu$ sec, until full regulation is achieved.

During the soft start state, the high-side FET (Q1) is operated asynchronously until  $PMID > V_{BAT}$ .

**BST State**

This is the normal operating mode of the regulator. The regulator uses a calculated  $t_{OFF}$ , modulated  $t_{ON}$  scheme. The calculated  $t_{OFF}$  is proportional to  $V_{IN}/V_{OUT}$ , which keeps the regulator's switching frequency reasonably constant in CCM.  $t_{ON(MIN)}$  is proportional to  $V_{BAT}$  and is a higher value if the inductor current reached 0 before  $t_{OFF(MIN)}$  in the prior cycle.

To ensure  $V_{BUS}$  does not overshoot the regulation point, the boost switch remains off as long as  $V_{BUS} > V_{REF_{BOOST}}$ .

If a USB peripheral hot insertion causes  $V_{BUS}$  to dip below  $V_{BAT}$ , the device will commence a restart without faulting.

**Boost Faults**

If a BOOST fault occurs:

1. The STAT pin pulses
2.  $OPA\_MODE$  bit is reset
3. The power stage is in High-Impedance Mode
4. The FAULT bits (REG0[2:0]) are set per Table 13.

**Restart After Boost Faults**

$OPA\_MODE$  is reset on boost faults. Boost Mode can only be re-enabled by setting the  $OPA\_MODE$  bit.

**I<sup>2</sup>C INTERFACE**

The FAN54063’s serial interface is compatible with Standard, Fast, Fast Plus, and High-Speed Mode I<sup>2</sup>C bus specifications. The FAN54063 SCL line is an input and the SDA line is a bi-directional open-drain output; it can only pull down the bus when active. The SDA line only pulls LOW during data reads and when signaling ACK. All data is shifted in MSB (bit 7) first.

**Slave Address**


**Table 14. I<sup>2</sup>C SLAVE ADDRESS BYTE**

| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0   |
|---|---|---|---|---|---|---|-----|
| 1 | 1 | 0 | 1 | 0 | 1 | 1 | R/W |

In hex notation, the slave address assumes a 0 LSB. The hex slave address is D6 for all parts in the family. Other slave addresses can be accommodated upon request. *Contact a onsemi representative.*


**Bus Timing**

Shown in Figure 37, data is normally transferred when SCL is LOW. Data is clocked in on the rising edge of SCL. Typically, data transitions shortly at or after the falling edge of SCL to allow ample time for the data to set up before the next SCL rising edge.

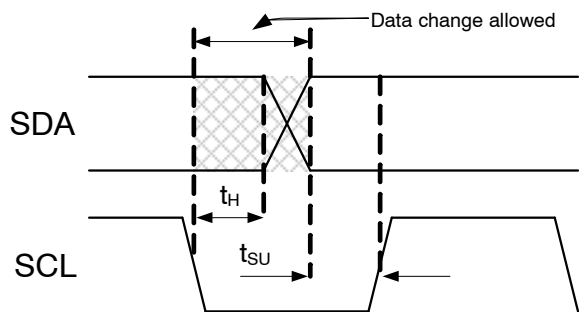


**Figure 37. Data Transfer Timing**

Each bus transaction begins and ends with SDA and SCL HIGH. A transaction begins with a START condition, which is defined as SDA transitioning from 1 to 0 with SCL HIGH, as shown in Figure 38.

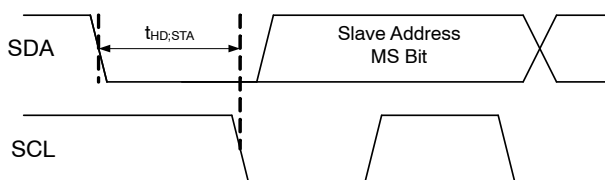

**Figure 38. Start Bit**

Transactions end with a STOP condition, which is SDA transitioning from 0 to 1 with SCL HIGH, as shown in Figure 39.

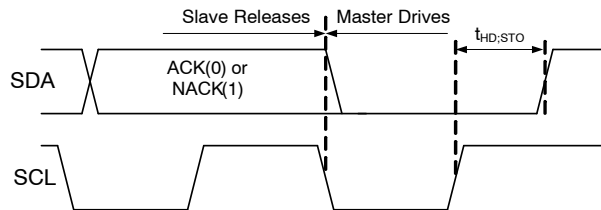

**Figure 39. Stop Bit**


During a read from the FAN54063, the master issues a Repeated Start after sending the register address and before resending the slave address. The Repeated Start is a 1-to-0 transition on SDA while SCL is HIGH, as shown in Figure 40.

**High-Speed (HS) Mode**

The protocols for High-Speed (HS), Low-Speed (LS), and Fast-Speed (FS) Modes are identical except the bus speed for HS Mode is 3.4 MHz. HS Mode is entered when the bus master sends the HS master code 00001XXX after a start condition. The master code is sent in Fast or Fast Plus Mode (less than 1 MHz clock); slaves do not ACK the transmission.

The master then generates a repeated start condition that causes all slaves on the bus to switch to HS Mode. The master then sends I<sup>2</sup>C packets, as described above, using the HS Mode clock rate and timing.

The bus remains in HS Mode until a stop bit is sent by the master. While in HS Mode, packets are separated by repeated start conditions (Figure 40).

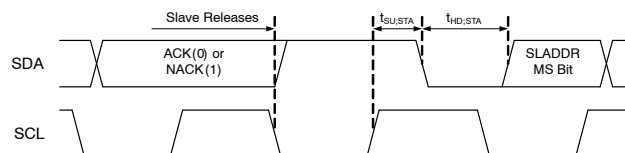

**Figure 40. Repeated Start Timing**

**Read and Write Transactions**

The figures below outline the sequences for data read and write. Bus control is signified by the shading of the packet,

defined as Master Drives Bus and Slave Drives Bus. All addresses and data are MSB first.

**Table 15. BIT DEFINITIONS FOR FIGURE 41– FIGURE 44**

| Symbol    | Definition   |
|-----------|--|
| S         | START, see Figure 38   |
| A         | ACK. The slave drives SDA to 0 to acknowledge the preceding packet |
| $\bar{A}$ | NACK. The slave sends a 1 to NACK the preceding packet             |
| R         | Repeated START, see Figure 40                                      |
| P         | STOP, see Figure 39  |

**Multi-Byte (Sequential) Read and Write Transactions**

*Sequential Write*

The Slave Address, Reg Addr address, and the first data byte are transmitted to the FAN54063 in the same way as in a byte write Figure 41. However, instead of generating a Stop condition, the master transmits additional bytes that are written to consecutive sequential registers after the falling edge of the eighth bit. After the last byte written and its ACK bit received, the master issues a STOP bit. The IC contains an 8-bit counter that increments the address pointer after each byte is written.

**Sequential Read**


Sequential reads are initiated in the same way as a single-byte read, except that once the slave transmits the first data byte, the master issues an acknowledge instead of a STOP condition. This directs the slave's I<sup>2</sup>C logic to transmit the next sequentially addressed 8-bit word. The FAN54063 contains an 8-bit counter that increments the address pointer after each byte is read, which allows the entire memory contents to be read during one I<sup>2</sup>C transaction.




**Figure 41. Single-Byte Write Transaction**



**Figure 42. Single-Byte Read Transaction**

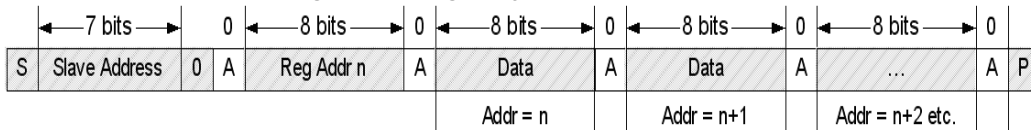

**Figure 43. Multi-Byte (Sequential) Write Transaction**

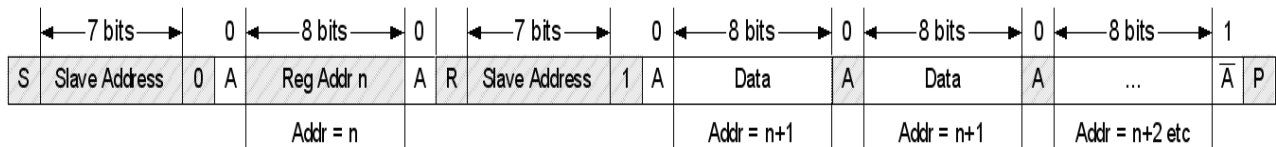

**Figure 44. Multi-Byte (Sequential) Read Transaction**

**REGISTER DESCRIPTIONS**

The Twelve user-accessible IC registers are defined in Table 17.

**Table 16. I<sup>2</sup>C REGISTER MAP**

| Register      |      | BIT NAME    |          |           |           |          |          |            |          |
|---------------|------|-------------|----------|-----------|-----------|----------|----------|------------|----------|
| Name          | REG# | 7           | 6        | 5         | 4         | 3        | 2        | 1          | 0        |
| CONTROL0      | 0H   | TMR_RST     | EN_STAT  | STAT      |           | BOOST    | FAULT    |            |          |
| CONTROL1      | 1H   | IBUSLIM     |          | VLOWV     |           | TE       | CE#      | HZ_MODE    | OPA_MODE |
| OREG          | 2H   | OREG        |          |           |           |          |          | DBAT_B     | EOC      |
| IC_INFO       | 3H   | Vendor Code |          | PN        |           |          | REVISION |            |          |
| IBAT          | 4H   | RESET       | IOCHARGE |           |           |          | ITERM    |            |          |
| VBUS_CONTROL  | 5H   | Reserved    | PROD     | IO_LEVEL  | VBUS_CON  | VLIM     | VBUSLIM  |            |          |
| SAFETY        | 6H   | ISAFE       |          |           |           | VSAFE    |          |            |          |
| POST_CHARGING | 7H   | Reserved    | Reserved | VBUS_LOAD |           | PC_EN    | PC_IT    |            |          |
| MONITOR0      | 10H  | ITERM_CMP   | VBAT_CMP | LINCHG    | T_120     | ICHG     | IBUS     | VBUS_VALID | CV       |
| MONITOR1      | 11H  | GATE        | VBAT     | POK_B     | DIS_LEVEL | NOBAT    | PC_ON    | Reserved   | Reserved |
| NTC           | 12H  | Reserved    |          | TEMP_DIS  | NTC_OK    | NTC4     | NTC3     | NTC2       | NTC1     |
| WD_CONTROL    | 13H  | Reserved    | Reserved | Reserved  | Reserved  | Reserved | EN_REG   | WD_DIS     | Reserved |
| RESTART       | FA   | RESTART     |          |           |           |          |          |            |          |

# FAN54063

**Table 17. REGISTER BIT DEFINITIONS**

This table defines the operation of each register bit. Default values are in **bold** text.

| Bit   | Name              | Value   | Type                    | Description   |              |                   |                   |   |          |          |         |   |   |   |                   |   |             |   |   |          |   |   |   |    |            |   |   |   |   |                   |   |   |   |   |             |   |   |   |   |                  |   |   |   |    |             |   |   |   |    |            |
|---|-------------------|---|-------------------------|---|--------------|-------------------|-------------------|---|----------|----------|---------|---|---|---|-------------------|---|-------------|---|---|----------|---|---|---|----|------------|---|---|---|---|-------------------|---|---|---|---|-------------|---|---|---|---|------------------|---|---|---|----|-------------|---|---|---|----|------------|
| <b>CONTROL0 REGISTER ADDRESS: 00H DEFAULT VALUE = 0100 0000 (40h)</b> |                   |   |                         |   |              |                   |                   |   |          |          |         |   |   |   |                   |   |             |   |   |          |   |   |   |    |            |   |   |   |   |                   |   |   |   |   |             |   |   |   |   |                  |   |   |   |    |             |   |   |   |    |            |
| 7   | TMR_RST           | <b>0</b>                                      | W                       | Writing a 1 resets the $t_{32S}$ timer; writing a 0 has no effect. Reading this bit always returns 0  |              |                   |                   |   |          |          |         |   |   |   |                   |   |             |   |   |          |   |   |   |    |            |   |   |   |   |                   |   |   |   |   |             |   |   |   |   |                  |   |   |   |    |             |   |   |   |    |            |
| 6   | EN_STAT           | 0   | R/W                     | Prevents STAT pin from going LOW during charging; STAT pin still pulses to enunciate faults   |              |                   |                   |   |          |          |         |   |   |   |                   |   |             |   |   |          |   |   |   |    |            |   |   |   |   |                   |   |   |   |   |             |   |   |   |   |                  |   |   |   |    |             |   |   |   |    |            |
|   |                   | 1   |                         | Enables STAT pin to be LOW when IC is charging  |              |                   |                   |   |          |          |         |   |   |   |                   |   |             |   |   |          |   |   |   |    |            |   |   |   |   |                   |   |   |   |   |             |   |   |   |   |                  |   |   |   |    |             |   |   |   |    |            |
| 5:4   | STAT              | <b>00</b>                                     | R                       | <table border="1"> <thead> <tr> <th>Bit</th> <th>STAT Description</th> </tr> </thead> <tbody> <tr> <td>5</td> <td>4</td> </tr> <tr> <td><b>0</b></td> <td><b>0</b></td> <td>Standby</td> </tr> <tr> <td>0</td> <td>1</td> <td>PWM enabled. Charging is occurring if CE# = 0</td> </tr> <tr> <td>1</td> <td>0</td> <td>Charge Done</td> </tr> <tr> <td>1</td> <td>1</td> <td>Fault</td> </tr> </tbody> </table>  | Bit          | STAT Description  | 5                 | 4 | <b>0</b> | <b>0</b> | Standby | 0 | 1 | PWM enabled. Charging is occurring if CE# = 0 | 1                 | 0 | Charge Done | 1 | 1 | Fault    |   |   |   |    |            |   |   |   |   |                   |   |   |   |   |             |   |   |   |   |                  |   |   |   |    |             |   |   |   |    |            |
| Bit   | STAT Description  |   |                         |   |              |                   |                   |   |          |          |         |   |   |   |                   |   |             |   |   |          |   |   |   |    |            |   |   |   |   |                   |   |   |   |   |             |   |   |   |   |                  |   |   |   |    |             |   |   |   |    |            |
| 5   | 4                 |   |                         |   |              |                   |                   |   |          |          |         |   |   |   |                   |   |             |   |   |          |   |   |   |    |            |   |   |   |   |                   |   |   |   |   |             |   |   |   |   |                  |   |   |   |    |             |   |   |   |    |            |
| <b>0</b>  | <b>0</b>          | Standby                                       |                         |   |              |                   |                   |   |          |          |         |   |   |   |                   |   |             |   |   |          |   |   |   |    |            |   |   |   |   |                   |   |   |   |   |             |   |   |   |   |                  |   |   |   |    |             |   |   |   |    |            |
| 0   | 1                 | PWM enabled. Charging is occurring if CE# = 0 |                         |   |              |                   |                   |   |          |          |         |   |   |   |                   |   |             |   |   |          |   |   |   |    |            |   |   |   |   |                   |   |   |   |   |             |   |   |   |   |                  |   |   |   |    |             |   |   |   |    |            |
| 1   | 0                 | Charge Done                                   |                         |   |              |                   |                   |   |          |          |         |   |   |   |                   |   |             |   |   |          |   |   |   |    |            |   |   |   |   |                   |   |   |   |   |             |   |   |   |   |                  |   |   |   |    |             |   |   |   |    |            |
| 1   | 1                 | Fault   |                         |   |              |                   |                   |   |          |          |         |   |   |   |                   |   |             |   |   |          |   |   |   |    |            |   |   |   |   |                   |   |   |   |   |             |   |   |   |   |                  |   |   |   |    |             |   |   |   |    |            |
| 3   | BOOST             | 0   | R                       | IC is not in Boost Mode   |              |                   |                   |   |          |          |         |   |   |   |                   |   |             |   |   |          |   |   |   |    |            |   |   |   |   |                   |   |   |   |   |             |   |   |   |   |                  |   |   |   |    |             |   |   |   |    |            |
|   |                   | 1   |                         | IC is in Boost Mode   |              |                   |                   |   |          |          |         |   |   |   |                   |   |             |   |   |          |   |   |   |    |            |   |   |   |   |                   |   |   |   |   |             |   |   |   |   |                  |   |   |   |    |             |   |   |   |    |            |
| 2:0   | FAULT             | <b>000</b>                                    | See table to the right. | <table border="1"> <thead> <tr> <th>Fault Bit</th> <th>Type</th> <th>FAULT Description</th> </tr> </thead> <tbody> <tr> <td>2</td> <td>1</td> <td>0</td> </tr> <tr> <td>0</td> <td>0</td> <td>0</td> <td>R</td> <td>Normal (No Fault)</td> </tr> <tr> <td>0</td> <td>0</td> <td>1</td> <td>R</td> <td>VBUS OVP</td> </tr> <tr> <td>0</td> <td>1</td> <td>0</td> <td>RC</td> <td>Sleep Mode</td> </tr> <tr> <td>0</td> <td>1</td> <td>1</td> <td>R</td> <td>Poor Input Source</td> </tr> <tr> <td>1</td> <td>0</td> <td>0</td> <td>R</td> <td>Battery OVP</td> </tr> <tr> <td>1</td> <td>0</td> <td>1</td> <td>R</td> <td>Thermal Shutdown</td> </tr> <tr> <td>1</td> <td>1</td> <td>0</td> <td>RC</td> <td>Timer Fault</td> </tr> <tr> <td>1</td> <td>1</td> <td>1</td> <td>RC</td> <td>No Battery</td> </tr> </tbody> </table> <p>For Boost Mode faults, see Table 13.</p> | Fault Bit    | Type              | FAULT Description | 2 | 1        | 0        | 0       | 0 | 0 | R   | Normal (No Fault) | 0 | 0           | 1 | R | VBUS OVP | 0 | 1 | 0 | RC | Sleep Mode | 0 | 1 | 1 | R | Poor Input Source | 1 | 0 | 0 | R | Battery OVP | 1 | 0 | 1 | R | Thermal Shutdown | 1 | 1 | 0 | RC | Timer Fault | 1 | 1 | 1 | RC | No Battery |
| Fault Bit   | Type              | FAULT Description                             |                         |   |              |                   |                   |   |          |          |         |   |   |   |                   |   |             |   |   |          |   |   |   |    |            |   |   |   |   |                   |   |   |   |   |             |   |   |   |   |                  |   |   |   |    |             |   |   |   |    |            |
| 2   | 1                 | 0   |                         |   |              |                   |                   |   |          |          |         |   |   |   |                   |   |             |   |   |          |   |   |   |    |            |   |   |   |   |                   |   |   |   |   |             |   |   |   |   |                  |   |   |   |    |             |   |   |   |    |            |
| 0   | 0                 | 0   | R                       | Normal (No Fault)   |              |                   |                   |   |          |          |         |   |   |   |                   |   |             |   |   |          |   |   |   |    |            |   |   |   |   |                   |   |   |   |   |             |   |   |   |   |                  |   |   |   |    |             |   |   |   |    |            |
| 0   | 0                 | 1   | R                       | VBUS OVP  |              |                   |                   |   |          |          |         |   |   |   |                   |   |             |   |   |          |   |   |   |    |            |   |   |   |   |                   |   |   |   |   |             |   |   |   |   |                  |   |   |   |    |             |   |   |   |    |            |
| 0   | 1                 | 0   | RC                      | Sleep Mode  |              |                   |                   |   |          |          |         |   |   |   |                   |   |             |   |   |          |   |   |   |    |            |   |   |   |   |                   |   |   |   |   |             |   |   |   |   |                  |   |   |   |    |             |   |   |   |    |            |
| 0   | 1                 | 1   | R                       | Poor Input Source   |              |                   |                   |   |          |          |         |   |   |   |                   |   |             |   |   |          |   |   |   |    |            |   |   |   |   |                   |   |   |   |   |             |   |   |   |   |                  |   |   |   |    |             |   |   |   |    |            |
| 1   | 0                 | 0   | R                       | Battery OVP   |              |                   |                   |   |          |          |         |   |   |   |                   |   |             |   |   |          |   |   |   |    |            |   |   |   |   |                   |   |   |   |   |             |   |   |   |   |                  |   |   |   |    |             |   |   |   |    |            |
| 1   | 0                 | 1   | R                       | Thermal Shutdown  |              |                   |                   |   |          |          |         |   |   |   |                   |   |             |   |   |          |   |   |   |    |            |   |   |   |   |                   |   |   |   |   |             |   |   |   |   |                  |   |   |   |    |             |   |   |   |    |            |
| 1   | 1                 | 0   | RC                      | Timer Fault   |              |                   |                   |   |          |          |         |   |   |   |                   |   |             |   |   |          |   |   |   |    |            |   |   |   |   |                   |   |   |   |   |             |   |   |   |   |                  |   |   |   |    |             |   |   |   |    |            |
| 1   | 1                 | 1   | RC                      | No Battery  |              |                   |                   |   |          |          |         |   |   |   |                   |   |             |   |   |          |   |   |   |    |            |   |   |   |   |                   |   |   |   |   |             |   |   |   |   |                  |   |   |   |    |             |   |   |   |    |            |
| <b>CONTROL1 REGISTER ADDRESS: 01H DEFAULT VALUE = 0011 0100 (34h)</b> |                   |   |                         |   |              |                   |                   |   |          |          |         |   |   |   |                   |   |             |   |   |          |   |   |   |    |            |   |   |   |   |                   |   |   |   |   |             |   |   |   |   |                  |   |   |   |    |             |   |   |   |    |            |
| 7:6   | IBUSLIM           | <b>00</b>                                     | R/W                     | <table border="1"> <thead> <tr> <th>Bit</th> <th><math>I_{BUSLIM}</math> (mA)</th> </tr> </thead> <tbody> <tr> <td>7</td> <td>6</td> </tr> <tr> <td><b>0</b></td> <td><b>0</b></td> <td>475</td> </tr> <tr> <td>0</td> <td>1</td> <td>760</td> </tr> <tr> <td>1</td> <td>0</td> <td>1080</td> </tr> <tr> <td>1</td> <td>1</td> <td>No Limit</td> </tr> </tbody> </table>  | Bit          | $I_{BUSLIM}$ (mA) | 7                 | 6 | <b>0</b> | <b>0</b> | 475     | 0 | 1 | 760   | 1                 | 0 | 1080        | 1 | 1 | No Limit |   |   |   |    |            |   |   |   |   |                   |   |   |   |   |             |   |   |   |   |                  |   |   |   |    |             |   |   |   |    |            |
| Bit   | $I_{BUSLIM}$ (mA) |   |                         |   |              |                   |                   |   |          |          |         |   |   |   |                   |   |             |   |   |          |   |   |   |    |            |   |   |   |   |                   |   |   |   |   |             |   |   |   |   |                  |   |   |   |    |             |   |   |   |    |            |
| 7   | 6                 |   |                         |   |              |                   |                   |   |          |          |         |   |   |   |                   |   |             |   |   |          |   |   |   |    |            |   |   |   |   |                   |   |   |   |   |             |   |   |   |   |                  |   |   |   |    |             |   |   |   |    |            |
| <b>0</b>  | <b>0</b>          | 475   |                         |   |              |                   |                   |   |          |          |         |   |   |   |                   |   |             |   |   |          |   |   |   |    |            |   |   |   |   |                   |   |   |   |   |             |   |   |   |   |                  |   |   |   |    |             |   |   |   |    |            |
| 0   | 1                 | 760   |                         |   |              |                   |                   |   |          |          |         |   |   |   |                   |   |             |   |   |          |   |   |   |    |            |   |   |   |   |                   |   |   |   |   |             |   |   |   |   |                  |   |   |   |    |             |   |   |   |    |            |
| 1   | 0                 | 1080  |                         |   |              |                   |                   |   |          |          |         |   |   |   |                   |   |             |   |   |          |   |   |   |    |            |   |   |   |   |                   |   |   |   |   |             |   |   |   |   |                  |   |   |   |    |             |   |   |   |    |            |
| 1   | 1                 | No Limit                                      |                         |   |              |                   |                   |   |          |          |         |   |   |   |                   |   |             |   |   |          |   |   |   |    |            |   |   |   |   |                   |   |   |   |   |             |   |   |   |   |                  |   |   |   |    |             |   |   |   |    |            |
| 5:4   | VLOWV             | <b>11</b>                                     | R/W                     | <table border="1"> <thead> <tr> <th>Bit</th> <th><math>V_{LOWV}</math> (V)</th> </tr> </thead> <tbody> <tr> <td>5</td> <td>4</td> </tr> <tr> <td>0</td> <td>0</td> <td>3.4</td> </tr> <tr> <td>0</td> <td>1</td> <td>3.5</td> </tr> <tr> <td>1</td> <td>0</td> <td>3.6</td> </tr> <tr> <td>1</td> <td>1</td> <td>3.7</td> </tr> </tbody> </table>   | Bit          | $V_{LOWV}$ (V)    | 5                 | 4 | 0        | 0        | 3.4     | 0 | 1 | 3.5   | 1                 | 0 | 3.6         | 1 | 1 | 3.7      |   |   |   |    |            |   |   |   |   |                   |   |   |   |   |             |   |   |   |   |                  |   |   |   |    |             |   |   |   |    |            |
| Bit   | $V_{LOWV}$ (V)    |   |                         |   |              |                   |                   |   |          |          |         |   |   |   |                   |   |             |   |   |          |   |   |   |    |            |   |   |   |   |                   |   |   |   |   |             |   |   |   |   |                  |   |   |   |    |             |   |   |   |    |            |
| 5   | 4                 |   |                         |   |              |                   |                   |   |          |          |         |   |   |   |                   |   |             |   |   |          |   |   |   |    |            |   |   |   |   |                   |   |   |   |   |             |   |   |   |   |                  |   |   |   |    |             |   |   |   |    |            |
| 0   | 0                 | 3.4   |                         |   |              |                   |                   |   |          |          |         |   |   |   |                   |   |             |   |   |          |   |   |   |    |            |   |   |   |   |                   |   |   |   |   |             |   |   |   |   |                  |   |   |   |    |             |   |   |   |    |            |
| 0   | 1                 | 3.5   |                         |   |              |                   |                   |   |          |          |         |   |   |   |                   |   |             |   |   |          |   |   |   |    |            |   |   |   |   |                   |   |   |   |   |             |   |   |   |   |                  |   |   |   |    |             |   |   |   |    |            |
| 1   | 0                 | 3.6   |                         |   |              |                   |                   |   |          |          |         |   |   |   |                   |   |             |   |   |          |   |   |   |    |            |   |   |   |   |                   |   |   |   |   |             |   |   |   |   |                  |   |   |   |    |             |   |   |   |    |            |
| 1   | 1                 | 3.7   |                         |   |              |                   |                   |   |          |          |         |   |   |   |                   |   |             |   |   |          |   |   |   |    |            |   |   |   |   |                   |   |   |   |   |             |   |   |   |   |                  |   |   |   |    |             |   |   |   |    |            |
| 3   | TE                | <b>0</b>                                      | R/W                     | Setting the TE bit to a 1 will enable Charge Termination.   |              |                   |                   |   |          |          |         |   |   |   |                   |   |             |   |   |          |   |   |   |    |            |   |   |   |   |                   |   |   |   |   |             |   |   |   |   |                  |   |   |   |    |             |   |   |   |    |            |
| 2   | CE#               | <b>1</b>                                      | R/W                     | This is an active low bit and by setting the bit to a "0" will enable Charging. When the bit is reset, it will return to the "1" state and charging will be disabled.   |              |                   |                   |   |          |          |         |   |   |   |                   |   |             |   |   |          |   |   |   |    |            |   |   |   |   |                   |   |   |   |   |             |   |   |   |   |                  |   |   |   |    |             |   |   |   |    |            |
| 1   | HZ_MODE           | <b>0</b>                                      | R/W                     | Setting this bit to a "1" puts the device in High Impedance mode.   | See Table 11 |                   |                   |   |          |          |         |   |   |   |                   |   |             |   |   |          |   |   |   |    |            |   |   |   |   |                   |   |   |   |   |             |   |   |   |   |                  |   |   |   |    |             |   |   |   |    |            |
| 0   | OPA_MODE          | <b>0</b>                                      | R/W                     | The device is in Charge Mode when the OPA_MODE bit = 0 and in Boost Operation when the bit = 1.   |              |                   |                   |   |          |          |         |   |   |   |                   |   |             |   |   |          |   |   |   |    |            |   |   |   |   |                   |   |   |   |   |             |   |   |   |   |                  |   |   |   |    |             |   |   |   |    |            |

# FAN54063

**Table 17. REGISTER BIT DEFINITIONS** (continued)

This table defines the operation of each register bit. Default values are in **bold** text.

| Bit  | Name   | Value             | Type     | Description   |                   |               |   |  |   |   |                         |  |                   |          |          |            |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |          |           |             |    |    |      |    |    |      |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |       |       |      |
|--|--|-------------------|----------|---|-------------------|---------------|---|--|---|---|-------------------------|--|-------------------|----------|----------|------------|----|----|------|----|----|------|---|----|------|----|----|------|----|----|------|----------|-----------|-------------|----|----|------|----|----|------|---|----|------|----|----|-------|----|----|------|---|----|-------|----|----|------|----|----|-------|---|----|------|----|----|-------|----|----|------|---|----|-------|----|----|------|----|----|-------|---|----|------|----|----|------|----|----|------|---|----|------|----|----|------|----|----|------|---|----|------|----|----|------|----|----|------|----|----|------|----|----|------|----|----|------|----|----|------|----|----|------|----|----|------|----|----|------|----|----|------|----|----|------|----|----|------|----|----|------|----|----|------|----|----|------|----|----|------|----|----|------|----|----|------|----|----|------|-------|-------|------|
| <b>OREG REGISTER ADDRESS: 02H DEFAULT VALUE = 0000 1000 (08h)</b>    |  |                   |          |   |                   |               |   |  |   |   |                         |  |                   |          |          |            |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |          |           |             |    |    |      |    |    |      |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |       |       |      |
| 7:2  | OREG   | <b>000010</b>     | R/W      | Charger output “float” voltage; programmable from 3.51 to 4.45 V in 20 mV increments.<br><table style="width: 100%; border-collapse: collapse; font-size: small;"> <thead> <tr> <th>Dec</th> <th>Hex</th> <th>V<sub>OREG</sub></th> <th>Dec</th> <th>Hex</th> <th>V<sub>OREG</sub></th> <th>Dec</th> <th>Hex</th> <th>V<sub>OREG</sub></th> </tr> </thead> <tbody> <tr><td>0</td><td>00</td><td>3.51</td><td>16</td><td>10</td><td>3.83</td><td>32</td><td>20</td><td>4.15</td></tr> <tr><td>1</td><td>01</td><td>3.53</td><td>17</td><td>11</td><td>3.85</td><td>33</td><td>21</td><td>4.17</td></tr> <tr><td><b>2</b></td><td><b>02</b></td><td><b>3.55</b></td><td>18</td><td>12</td><td>3.87</td><td>34</td><td>22</td><td>4.19</td></tr> <tr><td>3</td><td>03</td><td>3.57</td><td>19</td><td>13</td><td>3.89</td><td>35</td><td>23</td><td>4.21</td></tr> <tr><td>4</td><td>04</td><td>3.59</td><td>20</td><td>14</td><td>3.91</td><td>36</td><td>24</td><td>4.23</td></tr> <tr><td>5</td><td>05</td><td>3.61</td><td>21</td><td>15</td><td>3.93</td><td>37</td><td>25</td><td>4.25</td></tr> <tr><td>6</td><td>06</td><td>3.63</td><td>22</td><td>16</td><td>3.95</td><td>38</td><td>26</td><td>4.27</td></tr> <tr><td>7</td><td>07</td><td>3.65</td><td>23</td><td>17</td><td>3.97</td><td>39</td><td>27</td><td>4.29</td></tr> <tr><td>8</td><td>08</td><td>3.67</td><td>24</td><td>18</td><td>3.99</td><td>40</td><td>28</td><td>4.31</td></tr> <tr><td>9</td><td>09</td><td>3.69</td><td>25</td><td>19</td><td>4.01</td><td>41</td><td>29</td><td>4.33</td></tr> <tr><td>10</td><td>0A</td><td>3.71</td><td>26</td><td>1A</td><td>4.03</td><td>42</td><td>2A</td><td>4.35</td></tr> <tr><td>11</td><td>0B</td><td>3.73</td><td>27</td><td>1B</td><td>4.05</td><td>43</td><td>2B</td><td>4.37</td></tr> <tr><td>12</td><td>0C</td><td>3.75</td><td>28</td><td>1C</td><td>4.07</td><td>44</td><td>2C</td><td>4.39</td></tr> <tr><td>13</td><td>0D</td><td>3.77</td><td>29</td><td>1D</td><td>4.09</td><td>45</td><td>2D</td><td>4.41</td></tr> <tr><td>14</td><td>0E</td><td>3.79</td><td>30</td><td>1E</td><td>4.11</td><td>46</td><td>2E</td><td>4.43</td></tr> <tr><td>15</td><td>0F</td><td>3.81</td><td>31</td><td>1F</td><td>4.13</td><td>47–63</td><td>2F–3F</td><td>4.45</td></tr> </tbody> </table> | Dec               | Hex           | V <sub>OREG</sub>   | Dec  | Hex   | V <sub>OREG</sub>   | Dec                     | Hex  | V <sub>OREG</sub> | 0        | 00       | 3.51       | 16 | 10 | 3.83 | 32 | 20 | 4.15 | 1 | 01 | 3.53 | 17 | 11 | 3.85 | 33 | 21 | 4.17 | <b>2</b> | <b>02</b> | <b>3.55</b> | 18 | 12 | 3.87 | 34 | 22 | 4.19 | 3 | 03 | 3.57 | 19 | 13 | 3.89  | 35 | 23 | 4.21 | 4 | 04 | 3.59  | 20 | 14 | 3.91 | 36 | 24 | 4.23  | 5 | 05 | 3.61 | 21 | 15 | 3.93  | 37 | 25 | 4.25 | 6 | 06 | 3.63  | 22 | 16 | 3.95 | 38 | 26 | 4.27  | 7 | 07 | 3.65 | 23 | 17 | 3.97 | 39 | 27 | 4.29 | 8 | 08 | 3.67 | 24 | 18 | 3.99 | 40 | 28 | 4.31 | 9 | 09 | 3.69 | 25 | 19 | 4.01 | 41 | 29 | 4.33 | 10 | 0A | 3.71 | 26 | 1A | 4.03 | 42 | 2A | 4.35 | 11 | 0B | 3.73 | 27 | 1B | 4.05 | 43 | 2B | 4.37 | 12 | 0C | 3.75 | 28 | 1C | 4.07 | 44 | 2C | 4.39 | 13 | 0D | 3.77 | 29 | 1D | 4.09 | 45 | 2D | 4.41 | 14 | 0E | 3.79 | 30 | 1E | 4.11 | 46 | 2E | 4.43 | 15 | 0F | 3.81 | 31 | 1F | 4.13 | 47–63 | 2F–3F | 4.45 |
| Dec  | Hex  | V <sub>OREG</sub> | Dec      | Hex   | V <sub>OREG</sub> | Dec           | Hex   | V <sub>OREG</sub>  |   |   |                         |  |                   |          |          |            |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |          |           |             |    |    |      |    |    |      |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |       |       |      |
| 0  | 00   | 3.51              | 16       | 10  | 3.83              | 32            | 20  | 4.15   |   |   |                         |  |                   |          |          |            |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |          |           |             |    |    |      |    |    |      |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |       |       |      |
| 1  | 01   | 3.53              | 17       | 11  | 3.85              | 33            | 21  | 4.17   |   |   |                         |  |                   |          |          |            |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |          |           |             |    |    |      |    |    |      |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |       |       |      |
| <b>2</b>   | <b>02</b>  | <b>3.55</b>       | 18       | 12  | 3.87              | 34            | 22  | 4.19   |   |   |                         |  |                   |          |          |            |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |          |           |             |    |    |      |    |    |      |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |       |       |      |
| 3  | 03   | 3.57              | 19       | 13  | 3.89              | 35            | 23  | 4.21   |   |   |                         |  |                   |          |          |            |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |          |           |             |    |    |      |    |    |      |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |       |       |      |
| 4  | 04   | 3.59              | 20       | 14  | 3.91              | 36            | 24  | 4.23   |   |   |                         |  |                   |          |          |            |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |          |           |             |    |    |      |    |    |      |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |       |       |      |
| 5  | 05   | 3.61              | 21       | 15  | 3.93              | 37            | 25  | 4.25   |   |   |                         |  |                   |          |          |            |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |          |           |             |    |    |      |    |    |      |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |       |       |      |
| 6  | 06   | 3.63              | 22       | 16  | 3.95              | 38            | 26  | 4.27   |   |   |                         |  |                   |          |          |            |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |          |           |             |    |    |      |    |    |      |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |       |       |      |
| 7  | 07   | 3.65              | 23       | 17  | 3.97              | 39            | 27  | 4.29   |   |   |                         |  |                   |          |          |            |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |          |           |             |    |    |      |    |    |      |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |       |       |      |
| 8  | 08   | 3.67              | 24       | 18  | 3.99              | 40            | 28  | 4.31   |   |   |                         |  |                   |          |          |            |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |          |           |             |    |    |      |    |    |      |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |       |       |      |
| 9  | 09   | 3.69              | 25       | 19  | 4.01              | 41            | 29  | 4.33   |   |   |                         |  |                   |          |          |            |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |          |           |             |    |    |      |    |    |      |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |       |       |      |
| 10   | 0A   | 3.71              | 26       | 1A  | 4.03              | 42            | 2A  | 4.35   |   |   |                         |  |                   |          |          |            |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |          |           |             |    |    |      |    |    |      |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |       |       |      |
| 11   | 0B   | 3.73              | 27       | 1B  | 4.05              | 43            | 2B  | 4.37   |   |   |                         |  |                   |          |          |            |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |          |           |             |    |    |      |    |    |      |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |       |       |      |
| 12   | 0C   | 3.75              | 28       | 1C  | 4.07              | 44            | 2C  | 4.39   |   |   |                         |  |                   |          |          |            |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |          |           |             |    |    |      |    |    |      |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |       |       |      |
| 13   | 0D   | 3.77              | 29       | 1D  | 4.09              | 45            | 2D  | 4.41   |   |   |                         |  |                   |          |          |            |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |          |           |             |    |    |      |    |    |      |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |       |       |      |
| 14   | 0E   | 3.79              | 30       | 1E  | 4.11              | 46            | 2E  | 4.43   |   |   |                         |  |                   |          |          |            |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |          |           |             |    |    |      |    |    |      |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |       |       |      |
| 15   | 0F   | 3.81              | 31       | 1F  | 4.13              | 47–63         | 2F–3F   | 4.45   |   |   |                         |  |                   |          |          |            |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |          |           |             |    |    |      |    |    |      |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |       |       |      |
| 1  | DBAT_B   | <b>0</b>          | R/W      | Indicates that the IC detected a dead battery after V <sub>BUS</sub> _POR.<br><br>The IC sets this bit to 1 if a dead battery (V <sub>BAT</sub> < V <sub>SHORT</sub> ) was not detected at V <sub>BUS</sub> _POR.<br><br>Writing a “1” or a “0” to this bit does not affect charger operation. The bit state will not change until the next V <sub>BUS</sub> POR.   |                   |               |   |  |   |   |                         |  |                   |          |          |            |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |          |           |             |    |    |      |    |    |      |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |       |       |      |
|  |  | 1                 |          |   |                   |               |   |  |   |   |                         |  |                   |          |          |            |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |          |           |             |    |    |      |    |    |      |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |       |       |      |
| 0  | EOC  | <b>0</b>          | R/W      | If TE = “1”, and no battery is detected at I <sub>TERM</sub> , the IC turns off the PWM for t <sub>INT</sub> , then resumes charging and retries Battery Detection. If the battery is still absent, the process repeats with the “No Battery” fault re-enunciated, and sets the charging parameters to the default values (see Charge State Flow Chart)   |                   |               |   |  |   |   |                         |  |                   |          |          |            |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |          |           |             |    |    |      |    |    |      |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |       |       |      |
|  |  | 1                 |          | If no battery is detected when a full battery (end of charge) is reached, the PWM charger stays on, allowing the host processor to continue to run with no battery.   |                   |               |   |  |   |   |                         |  |                   |          |          |            |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |          |           |             |    |    |      |    |    |      |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |       |       |      |
| <b>IC_INFO REGISTER ADDRESS: 03H DEFAULT VALUE = 1001 0XXX (9Xh)</b> |  |                   |          |   |                   |               |   |  |   |   |                         |  |                   |          |          |            |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |          |           |             |    |    |      |    |    |      |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |       |       |      |
| 7:6  | Vendor Code  | <b>10</b>         | R        | Identifies <b>onsemi</b> as the IC supplier   |                   |               |   |  |   |   |                         |  |                   |          |          |            |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |          |           |             |    |    |      |    |    |      |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |       |       |      |
| 5:3  | PN   | <b>010</b>        | R        | Part number bits, <i>see Ordering Information</i>   |                   |               |   |  |   |   |                         |  |                   |          |          |            |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |          |           |             |    |    |      |    |    |      |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |       |       |      |
| 2:0  | REV  |                   | R        | IC Revision bits  |                   |               |   |  |   |   |                         |  |                   |          |          |            |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |          |           |             |    |    |      |    |    |      |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |       |       |      |
| <b>IBAT REGISTER ADDRESS: 04H DEFAULT VALUE = 1000 0001 (81h)</b>    |  |                   |          |   |                   |               |   |  |   |   |                         |  |                   |          |          |            |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |          |           |             |    |    |      |    |    |      |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |       |       |      |
| 7  | RESET  | <b>1</b>          | W        | <table style="width: 100%; border-collapse: collapse; font-size: small;"> <thead> <tr> <th style="width: 30%;">Conditions</th> <th style="width: 70%;">Functionality</th> </tr> </thead> <tbody> <tr> <td>Valid V<sub>BUS</sub>, V<sub>BAT</sub> &gt; V<sub>LOWV</sub></td> <td>Setting the RESET bit clears all registers (except SAFETY and CE#) including WD_DIS and HZ_MODE.</td> </tr> <tr> <td>Valid V<sub>BUS</sub>, V<sub>BAT</sub> &lt; V<sub>LOWV</sub></td> <td>Setting the RESET bit clears all registers (except SAFETY) including WD_DIS, HZ_MODE and CE#.</td> </tr> <tr> <td>Absent V<sub>BUS</sub></td> <td>Setting the RESET bit clears all registers (except SAFETY and CE#) including WD_DIS and HZ_MODE.</td> </tr> </tbody> </table> <p>Writing a 0 has no effect; read returns 1</p>   | Conditions        | Functionality | Valid V <sub>BUS</sub> , V <sub>BAT</sub> > V <sub>LOWV</sub> | Setting the RESET bit clears all registers (except SAFETY and CE#) including WD_DIS and HZ_MODE. | Valid V <sub>BUS</sub> , V <sub>BAT</sub> < V <sub>LOWV</sub> | Setting the RESET bit clears all registers (except SAFETY) including WD_DIS, HZ_MODE and CE#. | Absent V <sub>BUS</sub> | Setting the RESET bit clears all registers (except SAFETY and CE#) including WD_DIS and HZ_MODE. |                   |          |          |            |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |          |           |             |    |    |      |    |    |      |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |       |       |      |
| Conditions   | Functionality  |                   |          |   |                   |               |   |  |   |   |                         |  |                   |          |          |            |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |          |           |             |    |    |      |    |    |      |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |       |       |      |
| Valid V <sub>BUS</sub> , V <sub>BAT</sub> > V <sub>LOWV</sub>        | Setting the RESET bit clears all registers (except SAFETY and CE#) including WD_DIS and HZ_MODE. |                   |          |   |                   |               |   |  |   |   |                         |  |                   |          |          |            |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |          |           |             |    |    |      |    |    |      |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |       |       |      |
| Valid V <sub>BUS</sub> , V <sub>BAT</sub> < V <sub>LOWV</sub>        | Setting the RESET bit clears all registers (except SAFETY) including WD_DIS, HZ_MODE and CE#.    |                   |          |   |                   |               |   |  |   |   |                         |  |                   |          |          |            |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |          |           |             |    |    |      |    |    |      |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |       |       |      |
| Absent V <sub>BUS</sub>  | Setting the RESET bit clears all registers (except SAFETY and CE#) including WD_DIS and HZ_MODE. |                   |          |   |                   |               |   |  |   |   |                         |  |                   |          |          |            |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |          |           |             |    |    |      |    |    |      |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |       |       |      |
| 6:3  | IOCHARGE   | <b>0000</b>       | R/W      | <p>Programs the typical charge current (550 mA default)</p> <table style="width: 100%; border-collapse: collapse; font-size: small;"> <thead> <tr> <th style="width: 15%;">Bit</th> <th style="width: 15%;">6</th> <th style="width: 15%;">5</th> <th style="width: 15%;">4</th> <th style="width: 15%;">3</th> <th style="width: 30%;">IOCHARGE (mA)</th> </tr> </thead> <tbody> <tr><td><b>0</b></td><td><b>0</b></td><td><b>0</b></td><td><b>0</b></td><td><b>0</b></td><td><b>550</b></td></tr> <tr><td>0</td><td>0</td><td>0</td><td>0</td><td>1</td><td>650</td></tr> <tr><td>0</td><td>0</td><td>0</td><td>1</td><td>0</td><td>750</td></tr> <tr><td>0</td><td>0</td><td>0</td><td>1</td><td>1</td><td>850</td></tr> <tr><td>0</td><td>1</td><td>0</td><td>0</td><td>0</td><td>950</td></tr> <tr><td>0</td><td>1</td><td>0</td><td>0</td><td>1</td><td>1,050</td></tr> <tr><td>0</td><td>1</td><td>1</td><td>0</td><td>0</td><td>1,150</td></tr> <tr><td>0</td><td>1</td><td>1</td><td>0</td><td>1</td><td>1,250</td></tr> <tr><td>1</td><td>0</td><td>0</td><td>0</td><td>0</td><td>1,350</td></tr> <tr><td>1</td><td>0</td><td>0</td><td>0</td><td>1</td><td>1,450</td></tr> <tr><td></td><td></td><td></td><td></td><td></td><td>1,550</td></tr> </tbody> </table> <p style="text-align: center;">1010–1111</p>   | Bit               | 6             | 5   | 4  | 3   | IOCHARGE (mA)   | <b>0</b>                | <b>0</b>   | <b>0</b>          | <b>0</b> | <b>0</b> | <b>550</b> | 0  | 0  | 0    | 0  | 1  | 650  | 0 | 0  | 0    | 1  | 0  | 750  | 0  | 0  | 0    | 1        | 1         | 850         | 0  | 1  | 0    | 0  | 0  | 950  | 0 | 1  | 0    | 0  | 1  | 1,050 | 0  | 1  | 1    | 0 | 0  | 1,150 | 0  | 1  | 1    | 0  | 1  | 1,250 | 1 | 0  | 0    | 0  | 0  | 1,350 | 1  | 0  | 0    | 0 | 1  | 1,450 |    |    |      |    |    | 1,550 |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |       |       |      |
| Bit  | 6  | 5                 | 4        | 3   | IOCHARGE (mA)     |               |   |  |   |   |                         |  |                   |          |          |            |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |          |           |             |    |    |      |    |    |      |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |       |       |      |
| <b>0</b>   | <b>0</b>   | <b>0</b>          | <b>0</b> | <b>0</b>  | <b>550</b>        |               |   |  |   |   |                         |  |                   |          |          |            |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |          |           |             |    |    |      |    |    |      |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |       |       |      |
| 0  | 0  | 0                 | 0        | 1   | 650               |               |   |  |   |   |                         |  |                   |          |          |            |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |          |           |             |    |    |      |    |    |      |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |       |       |      |
| 0  | 0  | 0                 | 1        | 0   | 750               |               |   |  |   |   |                         |  |                   |          |          |            |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |          |           |             |    |    |      |    |    |      |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |       |       |      |
| 0  | 0  | 0                 | 1        | 1   | 850               |               |   |  |   |   |                         |  |                   |          |          |            |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |          |           |             |    |    |      |    |    |      |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |       |       |      |
| 0  | 1  | 0                 | 0        | 0   | 950               |               |   |  |   |   |                         |  |                   |          |          |            |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |          |           |             |    |    |      |    |    |      |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |       |       |      |
| 0  | 1  | 0                 | 0        | 1   | 1,050             |               |   |  |   |   |                         |  |                   |          |          |            |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |          |           |             |    |    |      |    |    |      |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |       |       |      |
| 0  | 1  | 1                 | 0        | 0   | 1,150             |               |   |  |   |   |                         |  |                   |          |          |            |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |          |           |             |    |    |      |    |    |      |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |       |       |      |
| 0  | 1  | 1                 | 0        | 1   | 1,250             |               |   |  |   |   |                         |  |                   |          |          |            |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |          |           |             |    |    |      |    |    |      |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |       |       |      |
| 1  | 0  | 0                 | 0        | 0   | 1,350             |               |   |  |   |   |                         |  |                   |          |          |            |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |          |           |             |    |    |      |    |    |      |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |       |       |      |
| 1  | 0  | 0                 | 0        | 1   | 1,450             |               |   |  |   |   |                         |  |                   |          |          |            |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |          |           |             |    |    |      |    |    |      |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |       |       |      |
|  |  |                   |          |   | 1,550             |               |   |  |   |   |                         |  |                   |          |          |            |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |          |           |             |    |    |      |    |    |      |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |       |    |    |      |   |    |       |    |    |      |    |    |       |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |   |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |    |    |      |       |       |      |



# FAN54063

**Table 17. REGISTER BIT DEFINITIONS** (continued)

This table defines the operation of each register bit. Default values are in **bold** text.

| Bit   | Name     | Value       | Type                   | Description  |   |   |   |                        |                    |   |   |       |          |          |          |            |   |   |     |       |   |   |   |       |          |          |          |              |     |          |          |          |          |            |   |       |   |   |       |       |   |   |   |       |   |   |   |   |       |   |   |   |   |       |   |   |   |   |       |           |  |  |  |       |
|---|----------|-------------|------------------------|--|---|---|---|------------------------|--------------------|---|---|-------|----------|----------|----------|------------|---|---|-----|-------|---|---|---|-------|----------|----------|----------|--------------|-----|----------|----------|----------|----------|------------|---|-------|---|---|-------|-------|---|---|---|-------|---|---|---|---|-------|---|---|---|---|-------|---|---|---|---|-------|-----------|--|--|--|-------|
| <b>IBAT</b> <span style="float: right;"><b>REGISTER ADDRESS: 04H</b>      <b>DEFAULT VALUE = 1000 0001 (81h)</b></span>   |          |             |                        |  |   |   |   |                        |                    |   |   |       |          |          |          |            |   |   |     |       |   |   |   |       |          |          |          |              |     |          |          |          |          |            |   |       |   |   |       |       |   |   |   |       |   |   |   |   |       |   |   |   |   |       |   |   |   |   |       |           |  |  |  |       |
| 2:0   | ITERM    | <b>001</b>  | R/W                    | Sets the current used for charging termination<br><table style="margin-left: 20px; border-collapse: collapse;"> <thead> <tr> <th style="text-align: left;">2</th> <th style="text-align: left;">1</th> <th style="text-align: left;">0</th> <th style="text-align: left;">I<sub>TERM</sub> (mA)</th> </tr> </thead> <tbody> <tr><td>0</td><td>0</td><td>0</td><td>50</td></tr> <tr><td><b>0</b></td><td><b>0</b></td><td><b>1</b></td><td><b>100</b></td></tr> <tr><td>0</td><td>1</td><td>0</td><td>150</td></tr> <tr><td>0</td><td>1</td><td>1</td><td>200</td></tr> <tr><td>1</td><td>0</td><td>0</td><td>250</td></tr> <tr><td>1</td><td>0</td><td>1</td><td>300</td></tr> <tr><td>1</td><td>1</td><td>0</td><td>350</td></tr> <tr><td>1</td><td>1</td><td>1</td><td>400</td></tr> </tbody> </table>   | 2 | 1 | 0 | I <sub>TERM</sub> (mA) | 0                  | 0 | 0 | 50    | <b>0</b> | <b>0</b> | <b>1</b> | <b>100</b> | 0 | 1 | 0   | 150   | 0 | 1 | 1 | 200   | 1        | 0        | 0        | 250          | 1   | 0        | 1        | 300      | 1        | 1          | 0 | 350   | 1 | 1 | 1     | 400   |   |   |   |       |   |   |   |   |       |   |   |   |   |       |   |   |   |   |       |           |  |  |  |       |
| 2   | 1        | 0           | I <sub>TERM</sub> (mA) |  |   |   |   |                        |                    |   |   |       |          |          |          |            |   |   |     |       |   |   |   |       |          |          |          |              |     |          |          |          |          |            |   |       |   |   |       |       |   |   |   |       |   |   |   |   |       |   |   |   |   |       |   |   |   |   |       |           |  |  |  |       |
| 0   | 0        | 0           | 50                     |  |   |   |   |                        |                    |   |   |       |          |          |          |            |   |   |     |       |   |   |   |       |          |          |          |              |     |          |          |          |          |            |   |       |   |   |       |       |   |   |   |       |   |   |   |   |       |   |   |   |   |       |   |   |   |   |       |           |  |  |  |       |
| <b>0</b>  | <b>0</b> | <b>1</b>    | <b>100</b>             |  |   |   |   |                        |                    |   |   |       |          |          |          |            |   |   |     |       |   |   |   |       |          |          |          |              |     |          |          |          |          |            |   |       |   |   |       |       |   |   |   |       |   |   |   |   |       |   |   |   |   |       |   |   |   |   |       |           |  |  |  |       |
| 0   | 1        | 0           | 150                    |  |   |   |   |                        |                    |   |   |       |          |          |          |            |   |   |     |       |   |   |   |       |          |          |          |              |     |          |          |          |          |            |   |       |   |   |       |       |   |   |   |       |   |   |   |   |       |   |   |   |   |       |   |   |   |   |       |           |  |  |  |       |
| 0   | 1        | 1           | 200                    |  |   |   |   |                        |                    |   |   |       |          |          |          |            |   |   |     |       |   |   |   |       |          |          |          |              |     |          |          |          |          |            |   |       |   |   |       |       |   |   |   |       |   |   |   |   |       |   |   |   |   |       |   |   |   |   |       |           |  |  |  |       |
| 1   | 0        | 0           | 250                    |  |   |   |   |                        |                    |   |   |       |          |          |          |            |   |   |     |       |   |   |   |       |          |          |          |              |     |          |          |          |          |            |   |       |   |   |       |       |   |   |   |       |   |   |   |   |       |   |   |   |   |       |   |   |   |   |       |           |  |  |  |       |
| 1   | 0        | 1           | 300                    |  |   |   |   |                        |                    |   |   |       |          |          |          |            |   |   |     |       |   |   |   |       |          |          |          |              |     |          |          |          |          |            |   |       |   |   |       |       |   |   |   |       |   |   |   |   |       |   |   |   |   |       |   |   |   |   |       |           |  |  |  |       |
| 1   | 1        | 0           | 350                    |  |   |   |   |                        |                    |   |   |       |          |          |          |            |   |   |     |       |   |   |   |       |          |          |          |              |     |          |          |          |          |            |   |       |   |   |       |       |   |   |   |       |   |   |   |   |       |   |   |   |   |       |   |   |   |   |       |           |  |  |  |       |
| 1   | 1        | 1           | 400                    |  |   |   |   |                        |                    |   |   |       |          |          |          |            |   |   |     |       |   |   |   |       |          |          |          |              |     |          |          |          |          |            |   |       |   |   |       |       |   |   |   |       |   |   |   |   |       |   |   |   |   |       |   |   |   |   |       |           |  |  |  |       |
| <b>VBUS_CONTROL</b> <span style="float: right;"><b>REGISTER ADDRESS: 05H</b>      <b>DEFAULT VALUE = 001X X100</b></span> |          |             |                        |  |   |   |   |                        |                    |   |   |       |          |          |          |            |   |   |     |       |   |   |   |       |          |          |          |              |     |          |          |          |          |            |   |       |   |   |       |       |   |   |   |       |   |   |   |   |       |   |   |   |   |       |   |   |   |   |       |           |  |  |  |       |
| 7   | Reserved | <b>0</b>    | R                      | This bit always returns 0  |   |   |   |                        |                    |   |   |       |          |          |          |            |   |   |     |       |   |   |   |       |          |          |          |              |     |          |          |          |          |            |   |       |   |   |       |       |   |   |   |       |   |   |   |   |       |   |   |   |   |       |   |   |   |   |       |           |  |  |  |       |
| 6   | PROD     | <b>0</b>    | R/W                    | Charger operates in Normal Mode.   |   |   |   |                        |                    |   |   |       |          |          |          |            |   |   |     |       |   |   |   |       |          |          |          |              |     |          |          |          |          |            |   |       |   |   |       |       |   |   |   |       |   |   |   |   |       |   |   |   |   |       |   |   |   |   |       |           |  |  |  |       |
|   |          | 1           |                        | Charger operates in Production Test Mode.  |   |   |   |                        |                    |   |   |       |          |          |          |            |   |   |     |       |   |   |   |       |          |          |          |              |     |          |          |          |          |            |   |       |   |   |       |       |   |   |   |       |   |   |   |   |       |   |   |   |   |       |   |   |   |   |       |           |  |  |  |       |
| 5   | IO_LEVEL | 0           | R/W                    | Battery current is controlled by IOCHARGE and IBUSLIM bits while Fast Charging. During Precharge Mode, battery current is limited to 450 mA when I <sub>OCHARGE</sub> ≤ 750 mA and 730 mA when I <sub>OCHARGE</sub> > 750 mA. IBUSLIM bits must be set to "10" or "11" or IO_LEVEL current will remain at 200 mA.  |   |   |   |                        |                    |   |   |       |          |          |          |            |   |   |     |       |   |   |   |       |          |          |          |              |     |          |          |          |          |            |   |       |   |   |       |       |   |   |   |       |   |   |   |   |       |   |   |   |   |       |   |   |   |   |       |           |  |  |  |       |
|   |          | 1           |                        | Battery current control is set to 200 mA for Fast Charge and Precharge Mode.   |   |   |   |                        |                    |   |   |       |          |          |          |            |   |   |     |       |   |   |   |       |          |          |          |              |     |          |          |          |          |            |   |       |   |   |       |       |   |   |   |       |   |   |   |   |       |   |   |   |   |       |   |   |   |   |       |           |  |  |  |       |
| 4   | VBUS_CON |             | R                      | 1 Indicates that V <sub>BUS</sub> is above 4.4 V (rising) or 3.7 V (falling). When VBUS_CON changes from 0 to 1, a STAT pulse occurs.  |   |   |   |                        |                    |   |   |       |          |          |          |            |   |   |     |       |   |   |   |       |          |          |          |              |     |          |          |          |          |            |   |       |   |   |       |       |   |   |   |       |   |   |   |   |       |   |   |   |   |       |   |   |   |   |       |           |  |  |  |       |
| 3   | VLIM     | 0           | R                      | VBUS control loop is not active (V <sub>BUS</sub> is able to stay above V <sub>BUSLIM</sub> )  |   |   |   |                        |                    |   |   |       |          |          |          |            |   |   |     |       |   |   |   |       |          |          |          |              |     |          |          |          |          |            |   |       |   |   |       |       |   |   |   |       |   |   |   |   |       |   |   |   |   |       |   |   |   |   |       |           |  |  |  |       |
|   |          | 1           |                        | VBUS control loop is active and V <sub>BUS</sub> is being regulated to V <sub>BUSLIM</sub>   |   |   |   |                        |                    |   |   |       |          |          |          |            |   |   |     |       |   |   |   |       |          |          |          |              |     |          |          |          |          |            |   |       |   |   |       |       |   |   |   |       |   |   |   |   |       |   |   |   |   |       |   |   |   |   |       |           |  |  |  |       |
| 2:0   | VBUSLIM  | <b>100</b>  | R/W                    | VBUS control voltage reference<br><table style="margin-left: 20px; border-collapse: collapse;"> <thead> <tr> <th style="text-align: left;">2</th> <th style="text-align: left;">1</th> <th style="text-align: left;">0</th> <th style="text-align: left;">VBUSLIM (V)</th> </tr> </thead> <tbody> <tr><td>0</td><td>0</td><td>0</td><td>4.213</td></tr> <tr><td>0</td><td>0</td><td>1</td><td>4.293</td></tr> <tr><td>0</td><td>1</td><td>0</td><td>4.373</td></tr> <tr><td>0</td><td>1</td><td>1</td><td>4.453</td></tr> <tr><td><b>1</b></td><td><b>0</b></td><td><b>0</b></td><td><b>4.533</b></td></tr> <tr><td>1</td><td>0</td><td>1</td><td>4.613</td></tr> <tr><td>1</td><td>1</td><td>0</td><td>4.693</td></tr> <tr><td>1</td><td>1</td><td>1</td><td>4.773</td></tr> </tbody> </table>  | 2 | 1 | 0 | VBUSLIM (V)            | 0                  | 0 | 0 | 4.213 | 0        | 0        | 1        | 4.293      | 0 | 1 | 0   | 4.373 | 0 | 1 | 1 | 4.453 | <b>1</b> | <b>0</b> | <b>0</b> | <b>4.533</b> | 1   | 0        | 1        | 4.613    | 1        | 1          | 0 | 4.693 | 1 | 1 | 1     | 4.773 |   |   |   |       |   |   |   |   |       |   |   |   |   |       |   |   |   |   |       |           |  |  |  |       |
| 2   | 1        | 0           | VBUSLIM (V)            |  |   |   |   |                        |                    |   |   |       |          |          |          |            |   |   |     |       |   |   |   |       |          |          |          |              |     |          |          |          |          |            |   |       |   |   |       |       |   |   |   |       |   |   |   |   |       |   |   |   |   |       |   |   |   |   |       |           |  |  |  |       |
| 0   | 0        | 0           | 4.213                  |  |   |   |   |                        |                    |   |   |       |          |          |          |            |   |   |     |       |   |   |   |       |          |          |          |              |     |          |          |          |          |            |   |       |   |   |       |       |   |   |   |       |   |   |   |   |       |   |   |   |   |       |   |   |   |   |       |           |  |  |  |       |
| 0   | 0        | 1           | 4.293                  |  |   |   |   |                        |                    |   |   |       |          |          |          |            |   |   |     |       |   |   |   |       |          |          |          |              |     |          |          |          |          |            |   |       |   |   |       |       |   |   |   |       |   |   |   |   |       |   |   |   |   |       |   |   |   |   |       |           |  |  |  |       |
| 0   | 1        | 0           | 4.373                  |  |   |   |   |                        |                    |   |   |       |          |          |          |            |   |   |     |       |   |   |   |       |          |          |          |              |     |          |          |          |          |            |   |       |   |   |       |       |   |   |   |       |   |   |   |   |       |   |   |   |   |       |   |   |   |   |       |           |  |  |  |       |
| 0   | 1        | 1           | 4.453                  |  |   |   |   |                        |                    |   |   |       |          |          |          |            |   |   |     |       |   |   |   |       |          |          |          |              |     |          |          |          |          |            |   |       |   |   |       |       |   |   |   |       |   |   |   |   |       |   |   |   |   |       |   |   |   |   |       |           |  |  |  |       |
| <b>1</b>  | <b>0</b> | <b>0</b>    | <b>4.533</b>           |  |   |   |   |                        |                    |   |   |       |          |          |          |            |   |   |     |       |   |   |   |       |          |          |          |              |     |          |          |          |          |            |   |       |   |   |       |       |   |   |   |       |   |   |   |   |       |   |   |   |   |       |   |   |   |   |       |           |  |  |  |       |
| 1   | 0        | 1           | 4.613                  |  |   |   |   |                        |                    |   |   |       |          |          |          |            |   |   |     |       |   |   |   |       |          |          |          |              |     |          |          |          |          |            |   |       |   |   |       |       |   |   |   |       |   |   |   |   |       |   |   |   |   |       |   |   |   |   |       |           |  |  |  |       |
| 1   | 1        | 0           | 4.693                  |  |   |   |   |                        |                    |   |   |       |          |          |          |            |   |   |     |       |   |   |   |       |          |          |          |              |     |          |          |          |          |            |   |       |   |   |       |       |   |   |   |       |   |   |   |   |       |   |   |   |   |       |   |   |   |   |       |           |  |  |  |       |
| 1   | 1        | 1           | 4.773                  |  |   |   |   |                        |                    |   |   |       |          |          |          |            |   |   |     |       |   |   |   |       |          |          |          |              |     |          |          |          |          |            |   |       |   |   |       |       |   |   |   |       |   |   |   |   |       |   |   |   |   |       |   |   |   |   |       |           |  |  |  |       |
| <b>SAFETY</b> <span style="float: right;"><b>REGISTER ADDRESS: 06H</b>      <b>DEFAULT VALUE = 0100 1010 (4Ah)</b></span> |          |             |                        |  |   |   |   |                        |                    |   |   |       |          |          |          |            |   |   |     |       |   |   |   |       |          |          |          |              |     |          |          |          |          |            |   |       |   |   |       |       |   |   |   |       |   |   |   |   |       |   |   |   |   |       |   |   |   |   |       |           |  |  |  |       |
| 7:4   | ISAFE    | <b>0100</b> | R/W                    | Sets the maximum IOCHARGE value used by the control circuit<br><table style="margin-left: 20px; border-collapse: collapse;"> <thead> <tr> <th style="text-align: left;">7</th> <th style="text-align: left;">6</th> <th style="text-align: left;">5</th> <th style="text-align: left;">4</th> <th style="text-align: left;">IOCHARGE(MAX) (mA)</th> </tr> </thead> <tbody> <tr><td>0</td><td>0</td><td>0</td><td>0</td><td>550</td></tr> <tr><td>0</td><td>0</td><td>0</td><td>1</td><td>650</td></tr> <tr><td>0</td><td>0</td><td>1</td><td>0</td><td>750</td></tr> <tr><td>0</td><td>0</td><td>1</td><td>1</td><td>850</td></tr> <tr><td><b>0</b></td><td><b>1</b></td><td><b>0</b></td><td><b>0</b></td><td><b>950</b></td></tr> <tr><td>0</td><td>1</td><td>0</td><td>1</td><td>1,050</td></tr> <tr><td>0</td><td>1</td><td>1</td><td>0</td><td>1,050</td></tr> <tr><td>0</td><td>1</td><td>1</td><td>1</td><td>1,250</td></tr> <tr><td>1</td><td>0</td><td>0</td><td>0</td><td>1,350</td></tr> <tr><td>1</td><td>0</td><td>0</td><td>1</td><td>1,450</td></tr> <tr><td>1010–1111</td><td></td><td></td><td></td><td>1,550</td></tr> </tbody> </table> | 7 | 6 | 5 | 4                      | IOCHARGE(MAX) (mA) | 0 | 0 | 0     | 0        | 550      | 0        | 0          | 0 | 1 | 650 | 0     | 0 | 1 | 0 | 750   | 0        | 0        | 1        | 1            | 850 | <b>0</b> | <b>1</b> | <b>0</b> | <b>0</b> | <b>950</b> | 0 | 1     | 0 | 1 | 1,050 | 0     | 1 | 1 | 0 | 1,050 | 0 | 1 | 1 | 1 | 1,250 | 1 | 0 | 0 | 0 | 1,350 | 1 | 0 | 0 | 1 | 1,450 | 1010–1111 |  |  |  | 1,550 |
| 7   | 6        | 5           | 4                      | IOCHARGE(MAX) (mA)   |   |   |   |                        |                    |   |   |       |          |          |          |            |   |   |     |       |   |   |   |       |          |          |          |              |     |          |          |          |          |            |   |       |   |   |       |       |   |   |   |       |   |   |   |   |       |   |   |   |   |       |   |   |   |   |       |           |  |  |  |       |
| 0   | 0        | 0           | 0                      | 550  |   |   |   |                        |                    |   |   |       |          |          |          |            |   |   |     |       |   |   |   |       |          |          |          |              |     |          |          |          |          |            |   |       |   |   |       |       |   |   |   |       |   |   |   |   |       |   |   |   |   |       |   |   |   |   |       |           |  |  |  |       |
| 0   | 0        | 0           | 1                      | 650  |   |   |   |                        |                    |   |   |       |          |          |          |            |   |   |     |       |   |   |   |       |          |          |          |              |     |          |          |          |          |            |   |       |   |   |       |       |   |   |   |       |   |   |   |   |       |   |   |   |   |       |   |   |   |   |       |           |  |  |  |       |
| 0   | 0        | 1           | 0                      | 750  |   |   |   |                        |                    |   |   |       |          |          |          |            |   |   |     |       |   |   |   |       |          |          |          |              |     |          |          |          |          |            |   |       |   |   |       |       |   |   |   |       |   |   |   |   |       |   |   |   |   |       |   |   |   |   |       |           |  |  |  |       |
| 0   | 0        | 1           | 1                      | 850  |   |   |   |                        |                    |   |   |       |          |          |          |            |   |   |     |       |   |   |   |       |          |          |          |              |     |          |          |          |          |            |   |       |   |   |       |       |   |   |   |       |   |   |   |   |       |   |   |   |   |       |   |   |   |   |       |           |  |  |  |       |
| <b>0</b>  | <b>1</b> | <b>0</b>    | <b>0</b>               | <b>950</b>   |   |   |   |                        |                    |   |   |       |          |          |          |            |   |   |     |       |   |   |   |       |          |          |          |              |     |          |          |          |          |            |   |       |   |   |       |       |   |   |   |       |   |   |   |   |       |   |   |   |   |       |   |   |   |   |       |           |  |  |  |       |
| 0   | 1        | 0           | 1                      | 1,050  |   |   |   |                        |                    |   |   |       |          |          |          |            |   |   |     |       |   |   |   |       |          |          |          |              |     |          |          |          |          |            |   |       |   |   |       |       |   |   |   |       |   |   |   |   |       |   |   |   |   |       |   |   |   |   |       |           |  |  |  |       |
| 0   | 1        | 1           | 0                      | 1,050  |   |   |   |                        |                    |   |   |       |          |          |          |            |   |   |     |       |   |   |   |       |          |          |          |              |     |          |          |          |          |            |   |       |   |   |       |       |   |   |   |       |   |   |   |   |       |   |   |   |   |       |   |   |   |   |       |           |  |  |  |       |
| 0   | 1        | 1           | 1                      | 1,250  |   |   |   |                        |                    |   |   |       |          |          |          |            |   |   |     |       |   |   |   |       |          |          |          |              |     |          |          |          |          |            |   |       |   |   |       |       |   |   |   |       |   |   |   |   |       |   |   |   |   |       |   |   |   |   |       |           |  |  |  |       |
| 1   | 0        | 0           | 0                      | 1,350  |   |   |   |                        |                    |   |   |       |          |          |          |            |   |   |     |       |   |   |   |       |          |          |          |              |     |          |          |          |          |            |   |       |   |   |       |       |   |   |   |       |   |   |   |   |       |   |   |   |   |       |   |   |   |   |       |           |  |  |  |       |
| 1   | 0        | 0           | 1                      | 1,450  |   |   |   |                        |                    |   |   |       |          |          |          |            |   |   |     |       |   |   |   |       |          |          |          |              |     |          |          |          |          |            |   |       |   |   |       |       |   |   |   |       |   |   |   |   |       |   |   |   |   |       |   |   |   |   |       |           |  |  |  |       |
| 1010–1111   |          |             |                        | 1,550  |   |   |   |                        |                    |   |   |       |          |          |          |            |   |   |     |       |   |   |   |       |          |          |          |              |     |          |          |          |          |            |   |       |   |   |       |       |   |   |   |       |   |   |   |   |       |   |   |   |   |       |   |   |   |   |       |           |  |  |  |       |

# FAN54063

**Table 17. REGISTER BIT DEFINITIONS** (continued)

This table defines the operation of each register bit. Default values are in **bold** text.

| Bit                                    | Name       | Value          | Type | Description  |     |  |                |  |   |   |   |   |   |   |   |    |      |   |   |     |   |      |   |     |   |   |      |     |   |   |   |      |   |   |   |     |      |   |   |     |   |      |   |     |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |             |   |   |   |   |      |           |  |  |  |      |
|--|------------|----------------|------|--|-----|--|----------------|--|---|---|---|---|---|---|---|----|------|---|---|-----|---|------|---|-----|---|---|------|-----|---|---|---|------|---|---|---|-----|------|---|---|-----|---|------|---|-----|---|---|------|---|---|---|---|------|---|---|---|---|------|---|---|---|---|------|---|---|---|---|-------------|---|---|---|---|------|-----------|--|--|--|------|
| <b>SAFETY</b>                          |            |                |      |  |     |  |                |  |   |   |   |   |   |   |   |    |      |   |   |     |   |      |   |     |   |   |      |     |   |   |   |      |   |   |   |     |      |   |   |     |   |      |   |     |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |             |   |   |   |   |      |           |  |  |  |      |
| <b>REGISTER ADDRESS: 06H</b>           |            |                |      |  |     |  |                |  |   |   |   |   |   |   |   |    |      |   |   |     |   |      |   |     |   |   |      |     |   |   |   |      |   |   |   |     |      |   |   |     |   |      |   |     |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |             |   |   |   |   |      |           |  |  |  |      |
| <b>DEFAULT VALUE = 0100 1010 (4Ah)</b> |            |                |      |  |     |  |                |  |   |   |   |   |   |   |   |    |      |   |   |     |   |      |   |     |   |   |      |     |   |   |   |      |   |   |   |     |      |   |   |     |   |      |   |     |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |             |   |   |   |   |      |           |  |  |  |      |
| 3:0                                    | VSAFE      | <b>1010</b>    | R/W  | Sets the maximum $V_{OREG}$ used by the control circuit<br><table style="margin-left: 20px;"> <thead> <tr> <th colspan="2">Bit</th> <th colspan="2">VOREG(MAX) (V)</th> </tr> <tr> <th>3</th> <th>2</th> <th>1</th> <th>0</th> </tr> </thead> <tbody> <tr><td>0</td><td>0</td><td>0</td><td>0</td><td>4.21</td></tr> <tr><td>0</td><td>0</td><td>0</td><td>1</td><td>4.23</td></tr> <tr><td>0</td><td>0</td><td>1</td><td>0</td><td>4.25</td></tr> <tr><td>0</td><td>0</td><td>1</td><td>1</td><td>4.27</td></tr> <tr><td>0</td><td>1</td><td>0</td><td>0</td><td>4.29</td></tr> <tr><td>0</td><td>1</td><td>0</td><td>1</td><td>4.31</td></tr> <tr><td>0</td><td>1</td><td>1</td><td>0</td><td>4.33</td></tr> <tr><td>0</td><td>1</td><td>1</td><td>1</td><td>4.35</td></tr> <tr><td>1</td><td>0</td><td>0</td><td>0</td><td>4.37</td></tr> <tr><td>1</td><td>0</td><td>0</td><td>1</td><td>4.39</td></tr> <tr><td>1</td><td>0</td><td>1</td><td>0</td><td><b>4.41</b></td></tr> <tr><td>1</td><td>0</td><td>1</td><td>1</td><td>4.43</td></tr> <tr><td>1100–1111</td><td></td><td></td><td></td><td>4.45</td></tr> </tbody> </table> | Bit |  | VOREG(MAX) (V) |  | 3 | 2 | 1 | 0 | 0 | 0 | 0 | 0  | 4.21 | 0 | 0 | 0   | 1 | 4.23 | 0 | 0   | 1 | 0 | 4.25 | 0   | 0 | 1 | 1 | 4.27 | 0 | 1 | 0 | 0   | 4.29 | 0 | 1 | 0   | 1 | 4.31 | 0 | 1   | 1 | 0 | 4.33 | 0 | 1 | 1 | 1 | 4.35 | 1 | 0 | 0 | 0 | 4.37 | 1 | 0 | 0 | 1 | 4.39 | 1 | 0 | 1 | 0 | <b>4.41</b> | 1 | 0 | 1 | 1 | 4.43 | 1100–1111 |  |  |  | 4.45 |
| Bit                                    |            | VOREG(MAX) (V) |      |  |     |  |                |  |   |   |   |   |   |   |   |    |      |   |   |     |   |      |   |     |   |   |      |     |   |   |   |      |   |   |   |     |      |   |   |     |   |      |   |     |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |             |   |   |   |   |      |           |  |  |  |      |
| 3                                      | 2          | 1              | 0    |  |     |  |                |  |   |   |   |   |   |   |   |    |      |   |   |     |   |      |   |     |   |   |      |     |   |   |   |      |   |   |   |     |      |   |   |     |   |      |   |     |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |             |   |   |   |   |      |           |  |  |  |      |
| 0                                      | 0          | 0              | 0    | 4.21   |     |  |                |  |   |   |   |   |   |   |   |    |      |   |   |     |   |      |   |     |   |   |      |     |   |   |   |      |   |   |   |     |      |   |   |     |   |      |   |     |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |             |   |   |   |   |      |           |  |  |  |      |
| 0                                      | 0          | 0              | 1    | 4.23   |     |  |                |  |   |   |   |   |   |   |   |    |      |   |   |     |   |      |   |     |   |   |      |     |   |   |   |      |   |   |   |     |      |   |   |     |   |      |   |     |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |             |   |   |   |   |      |           |  |  |  |      |
| 0                                      | 0          | 1              | 0    | 4.25   |     |  |                |  |   |   |   |   |   |   |   |    |      |   |   |     |   |      |   |     |   |   |      |     |   |   |   |      |   |   |   |     |      |   |   |     |   |      |   |     |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |             |   |   |   |   |      |           |  |  |  |      |
| 0                                      | 0          | 1              | 1    | 4.27   |     |  |                |  |   |   |   |   |   |   |   |    |      |   |   |     |   |      |   |     |   |   |      |     |   |   |   |      |   |   |   |     |      |   |   |     |   |      |   |     |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |             |   |   |   |   |      |           |  |  |  |      |
| 0                                      | 1          | 0              | 0    | 4.29   |     |  |                |  |   |   |   |   |   |   |   |    |      |   |   |     |   |      |   |     |   |   |      |     |   |   |   |      |   |   |   |     |      |   |   |     |   |      |   |     |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |             |   |   |   |   |      |           |  |  |  |      |
| 0                                      | 1          | 0              | 1    | 4.31   |     |  |                |  |   |   |   |   |   |   |   |    |      |   |   |     |   |      |   |     |   |   |      |     |   |   |   |      |   |   |   |     |      |   |   |     |   |      |   |     |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |             |   |   |   |   |      |           |  |  |  |      |
| 0                                      | 1          | 1              | 0    | 4.33   |     |  |                |  |   |   |   |   |   |   |   |    |      |   |   |     |   |      |   |     |   |   |      |     |   |   |   |      |   |   |   |     |      |   |   |     |   |      |   |     |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |             |   |   |   |   |      |           |  |  |  |      |
| 0                                      | 1          | 1              | 1    | 4.35   |     |  |                |  |   |   |   |   |   |   |   |    |      |   |   |     |   |      |   |     |   |   |      |     |   |   |   |      |   |   |   |     |      |   |   |     |   |      |   |     |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |             |   |   |   |   |      |           |  |  |  |      |
| 1                                      | 0          | 0              | 0    | 4.37   |     |  |                |  |   |   |   |   |   |   |   |    |      |   |   |     |   |      |   |     |   |   |      |     |   |   |   |      |   |   |   |     |      |   |   |     |   |      |   |     |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |             |   |   |   |   |      |           |  |  |  |      |
| 1                                      | 0          | 0              | 1    | 4.39   |     |  |                |  |   |   |   |   |   |   |   |    |      |   |   |     |   |      |   |     |   |   |      |     |   |   |   |      |   |   |   |     |      |   |   |     |   |      |   |     |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |             |   |   |   |   |      |           |  |  |  |      |
| 1                                      | 0          | 1              | 0    | <b>4.41</b>  |     |  |                |  |   |   |   |   |   |   |   |    |      |   |   |     |   |      |   |     |   |   |      |     |   |   |   |      |   |   |   |     |      |   |   |     |   |      |   |     |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |             |   |   |   |   |      |           |  |  |  |      |
| 1                                      | 0          | 1              | 1    | 4.43   |     |  |                |  |   |   |   |   |   |   |   |    |      |   |   |     |   |      |   |     |   |   |      |     |   |   |   |      |   |   |   |     |      |   |   |     |   |      |   |     |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |             |   |   |   |   |      |           |  |  |  |      |
| 1100–1111                              |            |                |      | 4.45   |     |  |                |  |   |   |   |   |   |   |   |    |      |   |   |     |   |      |   |     |   |   |      |     |   |   |   |      |   |   |   |     |      |   |   |     |   |      |   |     |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |             |   |   |   |   |      |           |  |  |  |      |
| <b>POST_CHARGING</b>                   |            |                |      |  |     |  |                |  |   |   |   |   |   |   |   |    |      |   |   |     |   |      |   |     |   |   |      |     |   |   |   |      |   |   |   |     |      |   |   |     |   |      |   |     |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |             |   |   |   |   |      |           |  |  |  |      |
| <b>REGISTER ADDRESS: 07H</b>           |            |                |      |  |     |  |                |  |   |   |   |   |   |   |   |    |      |   |   |     |   |      |   |     |   |   |      |     |   |   |   |      |   |   |   |     |      |   |   |     |   |      |   |     |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |             |   |   |   |   |      |           |  |  |  |      |
| <b>DEFAULT VALUE = 0000 0001 (01h)</b> |            |                |      |  |     |  |                |  |   |   |   |   |   |   |   |    |      |   |   |     |   |      |   |     |   |   |      |     |   |   |   |      |   |   |   |     |      |   |   |     |   |      |   |     |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |             |   |   |   |   |      |           |  |  |  |      |
| 7:6                                    | Reserved   | <b>00</b>      | R    | These bits always return 0   |     |  |                |  |   |   |   |   |   |   |   |    |      |   |   |     |   |      |   |     |   |   |      |     |   |   |   |      |   |   |   |     |      |   |   |     |   |      |   |     |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |             |   |   |   |   |      |           |  |  |  |      |
| 5:4                                    | VBUS_LOAD  | <b>00</b>      | R/W  | After charger termination, in the charge done state, these bits control VBUS loading to improve detection of AC power removal from the AC adapter.<br><b>[5:4] VBUS Loading in Charge Done State:</b><br>00 None<br>01 Load VBUS for 4 ms every two seconds<br>10 Load VBUS for 131 ms every two seconds<br>11 Load VBUS for 135 ms every two seconds  |     |  |                |  |   |   |   |   |   |   |   |    |      |   |   |     |   |      |   |     |   |   |      |     |   |   |   |      |   |   |   |     |      |   |   |     |   |      |   |     |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |             |   |   |   |   |      |           |  |  |  |      |
| 3                                      | PC_EN      | <b>0</b>       | R/W  | Post charging or background charging feature is disabled   |     |  |                |  |   |   |   |   |   |   |   |    |      |   |   |     |   |      |   |     |   |   |      |     |   |   |   |      |   |   |   |     |      |   |   |     |   |      |   |     |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |             |   |   |   |   |      |           |  |  |  |      |
|  |            | 1              |      | Post charging or background charging feature is enabled  |     |  |                |  |   |   |   |   |   |   |   |    |      |   |   |     |   |      |   |     |   |   |      |     |   |   |   |      |   |   |   |     |      |   |   |     |   |      |   |     |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |             |   |   |   |   |      |           |  |  |  |      |
| 2:0                                    | PC_IT      | <b>001</b>     | R/W  | Sets the termination current for post charging<br><table style="margin-left: 20px;"> <thead> <tr> <th colspan="2">Bit</th> <th colspan="2">PC_IT (mA)</th> </tr> <tr> <th>2</th> <th>1</th> <th>0</th> <th></th> </tr> </thead> <tbody> <tr><td>0</td><td>0</td><td>0</td><td>50</td></tr> <tr><td>0</td><td>0</td><td>1</td><td>100</td></tr> <tr><td>0</td><td>1</td><td>0</td><td>150</td></tr> <tr><td>0</td><td>1</td><td>1</td><td>200</td></tr> <tr><td>1</td><td>0</td><td>0</td><td>250</td></tr> <tr><td>1</td><td>0</td><td>1</td><td>300</td></tr> <tr><td>1</td><td>1</td><td>0</td><td>350</td></tr> <tr><td>1</td><td>1</td><td>1</td><td>400</td></tr> </tbody> </table>   | Bit |  | PC_IT (mA)     |  | 2 | 1 | 0 |   | 0 | 0 | 0 | 50 | 0    | 0 | 1 | 100 | 0 | 1    | 0 | 150 | 0 | 1 | 1    | 200 | 1 | 0 | 0 | 250  | 1 | 0 | 1 | 300 | 1    | 1 | 0 | 350 | 1 | 1    | 1 | 400 |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |             |   |   |   |   |      |           |  |  |  |      |
| Bit                                    |            | PC_IT (mA)     |      |  |     |  |                |  |   |   |   |   |   |   |   |    |      |   |   |     |   |      |   |     |   |   |      |     |   |   |   |      |   |   |   |     |      |   |   |     |   |      |   |     |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |             |   |   |   |   |      |           |  |  |  |      |
| 2                                      | 1          | 0              |      |  |     |  |                |  |   |   |   |   |   |   |   |    |      |   |   |     |   |      |   |     |   |   |      |     |   |   |   |      |   |   |   |     |      |   |   |     |   |      |   |     |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |             |   |   |   |   |      |           |  |  |  |      |
| 0                                      | 0          | 0              | 50   |  |     |  |                |  |   |   |   |   |   |   |   |    |      |   |   |     |   |      |   |     |   |   |      |     |   |   |   |      |   |   |   |     |      |   |   |     |   |      |   |     |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |             |   |   |   |   |      |           |  |  |  |      |
| 0                                      | 0          | 1              | 100  |  |     |  |                |  |   |   |   |   |   |   |   |    |      |   |   |     |   |      |   |     |   |   |      |     |   |   |   |      |   |   |   |     |      |   |   |     |   |      |   |     |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |             |   |   |   |   |      |           |  |  |  |      |
| 0                                      | 1          | 0              | 150  |  |     |  |                |  |   |   |   |   |   |   |   |    |      |   |   |     |   |      |   |     |   |   |      |     |   |   |   |      |   |   |   |     |      |   |   |     |   |      |   |     |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |             |   |   |   |   |      |           |  |  |  |      |
| 0                                      | 1          | 1              | 200  |  |     |  |                |  |   |   |   |   |   |   |   |    |      |   |   |     |   |      |   |     |   |   |      |     |   |   |   |      |   |   |   |     |      |   |   |     |   |      |   |     |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |             |   |   |   |   |      |           |  |  |  |      |
| 1                                      | 0          | 0              | 250  |  |     |  |                |  |   |   |   |   |   |   |   |    |      |   |   |     |   |      |   |     |   |   |      |     |   |   |   |      |   |   |   |     |      |   |   |     |   |      |   |     |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |             |   |   |   |   |      |           |  |  |  |      |
| 1                                      | 0          | 1              | 300  |  |     |  |                |  |   |   |   |   |   |   |   |    |      |   |   |     |   |      |   |     |   |   |      |     |   |   |   |      |   |   |   |     |      |   |   |     |   |      |   |     |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |             |   |   |   |   |      |           |  |  |  |      |
| 1                                      | 1          | 0              | 350  |  |     |  |                |  |   |   |   |   |   |   |   |    |      |   |   |     |   |      |   |     |   |   |      |     |   |   |   |      |   |   |   |     |      |   |   |     |   |      |   |     |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |             |   |   |   |   |      |           |  |  |  |      |
| 1                                      | 1          | 1              | 400  |  |     |  |                |  |   |   |   |   |   |   |   |    |      |   |   |     |   |      |   |     |   |   |      |     |   |   |   |      |   |   |   |     |      |   |   |     |   |      |   |     |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |             |   |   |   |   |      |           |  |  |  |      |
| <b>MONITOR0</b>                        |            |                |      |  |     |  |                |  |   |   |   |   |   |   |   |    |      |   |   |     |   |      |   |     |   |   |      |     |   |   |   |      |   |   |   |     |      |   |   |     |   |      |   |     |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |             |   |   |   |   |      |           |  |  |  |      |
| <b>REGISTER ADDRESS: 10H</b>           |            |                |      |  |     |  |                |  |   |   |   |   |   |   |   |    |      |   |   |     |   |      |   |     |   |   |      |     |   |   |   |      |   |   |   |     |      |   |   |     |   |      |   |     |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |             |   |   |   |   |      |           |  |  |  |      |
| <b>DEFAULT VALUE = XXXX XXXX</b>       |            |                |      |  |     |  |                |  |   |   |   |   |   |   |   |    |      |   |   |     |   |      |   |     |   |   |      |     |   |   |   |      |   |   |   |     |      |   |   |     |   |      |   |     |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |             |   |   |   |   |      |           |  |  |  |      |
| 7                                      | ITERM_CMP  |                | R    | ITERM comparator output, 1 when $I_{CHARGE} > I_{TERM}$ reference  |     |  |                |  |   |   |   |   |   |   |   |    |      |   |   |     |   |      |   |     |   |   |      |     |   |   |   |      |   |   |   |     |      |   |   |     |   |      |   |     |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |             |   |   |   |   |      |           |  |  |  |      |
| 6                                      | VBAT_CMP   |                | R    | Output of VBAT comparator, 1 when $V_{BAT} < V_{BUS}$  |     |  |                |  |   |   |   |   |   |   |   |    |      |   |   |     |   |      |   |     |   |   |      |     |   |   |   |      |   |   |   |     |      |   |   |     |   |      |   |     |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |             |   |   |   |   |      |           |  |  |  |      |
| 5                                      | LINCHG     |                | R    | 1 when 30 mA linear charger ON ( $V_{BAT} < V_{SHORT}$ )   |     |  |                |  |   |   |   |   |   |   |   |    |      |   |   |     |   |      |   |     |   |   |      |     |   |   |   |      |   |   |   |     |      |   |   |     |   |      |   |     |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |             |   |   |   |   |      |           |  |  |  |      |
| 4                                      | T_120      |                | R    | Thermal regulation comparator, 1 when the die temperature is greater than 120°C. If battery is being charged in Precharge mode, the charge current is limited to 200 mA and in Fast Charge, 550 mA.  |     |  |                |  |   |   |   |   |   |   |   |    |      |   |   |     |   |      |   |     |   |   |      |     |   |   |   |      |   |   |   |     |      |   |   |     |   |      |   |     |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |             |   |   |   |   |      |           |  |  |  |      |
| 3                                      | ICHG       |                | R    | 0 indicates the ICHARGE loop is controlling the battery charge current.  |     |  |                |  |   |   |   |   |   |   |   |    |      |   |   |     |   |      |   |     |   |   |      |     |   |   |   |      |   |   |   |     |      |   |   |     |   |      |   |     |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |             |   |   |   |   |      |           |  |  |  |      |
| 2                                      | IBUS       |                | R    | 0 indicates the IBUS (input current) loop is controlling the battery charge current.   |     |  |                |  |   |   |   |   |   |   |   |    |      |   |   |     |   |      |   |     |   |   |      |     |   |   |   |      |   |   |   |     |      |   |   |     |   |      |   |     |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |             |   |   |   |   |      |           |  |  |  |      |
| 1                                      | VBUS_VALID |                | R    | 1 indicates $V_{BUS}$ has passed validation and is capable of charging.  |     |  |                |  |   |   |   |   |   |   |   |    |      |   |   |     |   |      |   |     |   |   |      |     |   |   |   |      |   |   |   |     |      |   |   |     |   |      |   |     |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |             |   |   |   |   |      |           |  |  |  |      |
| 0                                      | CV         |                | R    | 1 indicates the constant-voltage loop (OREG) is controlling the charger and all current limiting loops have released.  |     |  |                |  |   |   |   |   |   |   |   |    |      |   |   |     |   |      |   |     |   |   |      |     |   |   |   |      |   |   |   |     |      |   |   |     |   |      |   |     |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |             |   |   |   |   |      |           |  |  |  |      |
| <b>MONITOR1</b>                        |            |                |      |  |     |  |                |  |   |   |   |   |   |   |   |    |      |   |   |     |   |      |   |     |   |   |      |     |   |   |   |      |   |   |   |     |      |   |   |     |   |      |   |     |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |             |   |   |   |   |      |           |  |  |  |      |
| <b>REGISTER ADDRESS: 11H</b>           |            |                |      |  |     |  |                |  |   |   |   |   |   |   |   |    |      |   |   |     |   |      |   |     |   |   |      |     |   |   |   |      |   |   |   |     |      |   |   |     |   |      |   |     |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |             |   |   |   |   |      |           |  |  |  |      |
| <b>DEFAULT VALUE = XX1X XX00</b>       |            |                |      |  |     |  |                |  |   |   |   |   |   |   |   |    |      |   |   |     |   |      |   |     |   |   |      |     |   |   |   |      |   |   |   |     |      |   |   |     |   |      |   |     |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |             |   |   |   |   |      |           |  |  |  |      |
| 7                                      | GATE       |                | R    | The GATE bit indicates the state of the GATE pin. If the bit is "0", the pin is low, driving the PFET, Q5 on. A "1" will disable Q5, but current can still flow from battery to the system through Q5's body diode.  |     |  |                |  |   |   |   |   |   |   |   |    |      |   |   |     |   |      |   |     |   |   |      |     |   |   |   |      |   |   |   |     |      |   |   |     |   |      |   |     |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |             |   |   |   |   |      |           |  |  |  |      |
| 6                                      | VBAT       |                | R    | A "1" indicates $V_{BAT} > V_{LOWV}$ . A "0" indicates $V_{BAT} < V_{LOWV}$ in fast charging.  |     |  |                |  |   |   |   |   |   |   |   |    |      |   |   |     |   |      |   |     |   |   |      |     |   |   |   |      |   |   |   |     |      |   |   |     |   |      |   |     |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |      |   |   |   |   |             |   |   |   |   |      |           |  |  |  |      |

# FAN54063

**Table 17. REGISTER BIT DEFINITIONS** (continued)

This table defines the operation of each register bit. Default values are in **bold** text.

| Bit   | Name      | Value     | Type | Description  |
|---|-----------|-----------|------|--|
| <b>MONITOR1 REGISTER ADDRESS: 11H DEFAULT VALUE = XX1X XX00</b>         |           |           |      |  |
| 5   | POK_B     | <b>1</b>  | R/W  | POK_B indicates the state of the POK_B pin (see section on POK_B). This bit can be set to a 1 if VBAT has fallen below $V_{LOWV}$ ; in turn the open drain POK_B pin will be Hi-Z. |
| 4   | DIS_LEVEL |           | R    | This pin indicates the state of the DIS pin. A "1" indicates the DIS pin is high and the device is in a Hi-Z state on the input and the PWM controller is not running.             |
| 3   | NOBAT     |           | R    | A "1" on this bit indicates that the device has determined there is no battery connected.  |
| 2   | PC_ON     |           | R    | A "1" on this bit indicates that Post charging (background charging) is in progress.   |
| 1:0   | Reserved  | <b>00</b> | R    | These bits always return 0.  |
| <b>NTC REGISTER ADDRESS: 12H DEFAULT VALUE = 000X XXXX</b>              |           |           |      |  |
| 7:6   | Reserved  | <b>00</b> | R    | These bits always return 0.  |
| 5   | TEMP_DIS  | <b>0</b>  | R/W  | NTC Temperature measurement results affect charge parameters.  |
|   |           | <b>1</b>  |      | NTC Temperature measurement results do not affect charge. Temperature measurements continue to be updated every second in the NTC1–4 monitor bits.                                 |
| 4   | NTC_OK    |           | R    | 0 if NTC is either shorted to GND, open, or shorted to REF.  |
| 3   | NTC4      |           | R    | 1 indicates that NTC is above the T4 threshold.  |
| 2   | NTC3      |           | R    | 1 indicates that NTC is above the T3 threshold.  |
| 1   | NTC2      |           | R    | 1 indicates that NTC is above the T2 threshold.  |
| 0   | NTC1      |           | R    | 1 indicates that NTC is above the T1 threshold.  |
| See Battery Temperature (NTC) Monitor                                   |           |           |      |  |
| <b>WD_CONTROL REGISTER ADDRESS: 13H DEFAULT VALUE = 0110 1110 (6Eh)</b> |           |           |      |  |
| 7   | Reserved  | <b>0</b>  | R    | This bit always returns 0  |
| 6   | Reserved  | <b>1</b>  | R    | This bit always returns 1  |
| 5   | Reserved  | <b>1</b>  | R    | This bit always returns 1  |
| 4   | Reserved  | <b>0</b>  | R    | This bit always returns 0  |
| 3   | Reserved  | <b>1</b>  | R    | This bit always returns 1  |
| 2   | EN_VREG   | <b>1</b>  | R/W  | The EN_VREG defaults to a "1" enabling the regulator. To disable the regulator, set the bit to a "0".  |
| 1   | WD_DIS    | <b>1</b>  | R/W  | A "1" disables the Watchdog ( $t_{32s}$ ) timer. Setting the bit to a "0" will enable the timers (See Safety Timer Section for further information).                               |
| 0   | Reserved  | <b>0</b>  | R    | This bit always returns 0  |
| <b>RESTART REGISTER ADDRESS: FAH DEFAULT VALUE = 1111 1111 (FFh)</b>    |           |           |      |  |
| 7:0   | RESTART   |           | W    | Writing B5h restarts charging when the IC is in the charge done state. This register reads back FF.  |

**PCB LAYOUT RECOMMENDATION**

Bypass capacitors should be placed as close to the IC as possible. In particular, the total loop length for CMID should be minimized to reduce overshoot and ringing on the SW, PMID, and VBUS pins. Power and ground pins should be

routed directly to their bypass capacitors using the top copper layer. The copper area connecting to the IC should be maximized to improve thermal performance.

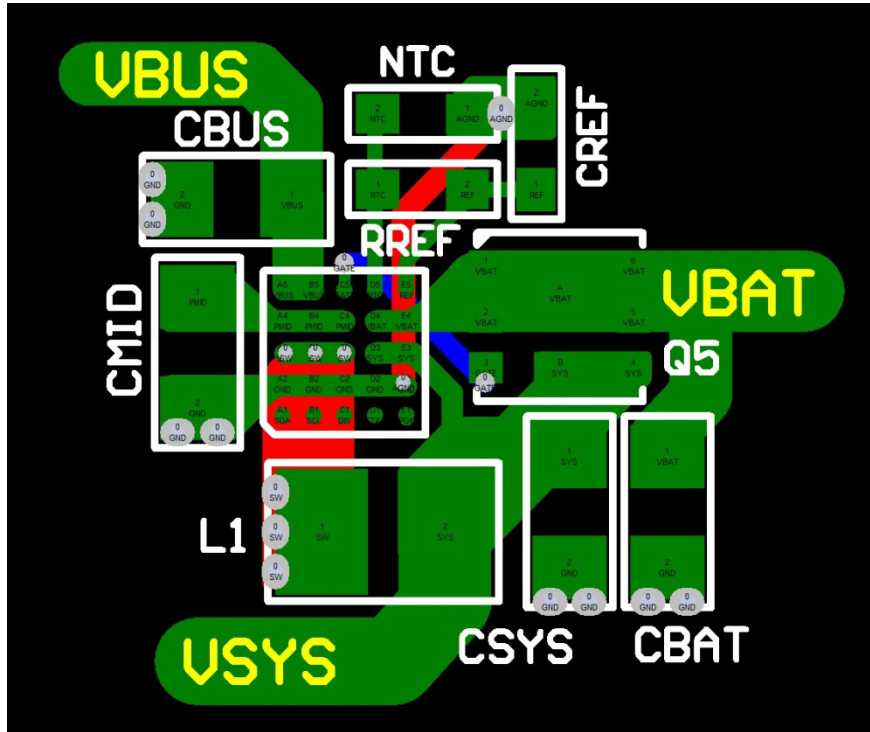


Figure 45. PCB Layout Recommendation





**PRODUCT-SPECIFIC DIMENSIONS**

| Product     | D           | E           | X     | Y     |
|-------------|-------------|-------------|-------|-------|
| FAN54063UCX | 2.40 ±0.030 | 2.00 ±0.030 | 0.180 | 0.380 |




**WLCSP25 2.4x2.0x0.586**  
CASE 567SQ  
ISSUE O

DATE 30 NOV 2016

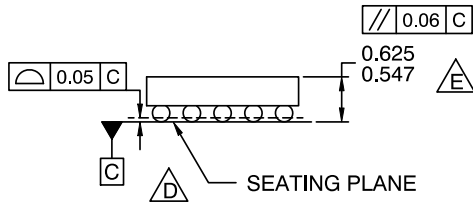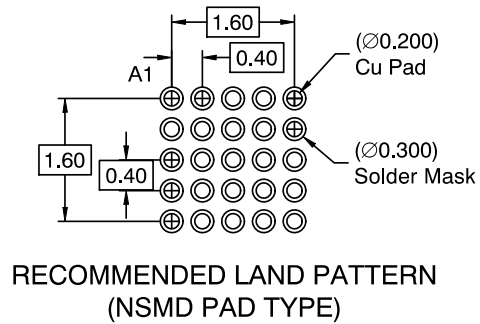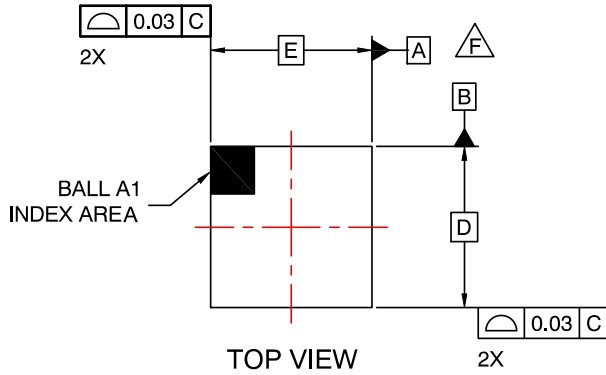

SIDE VIEWS

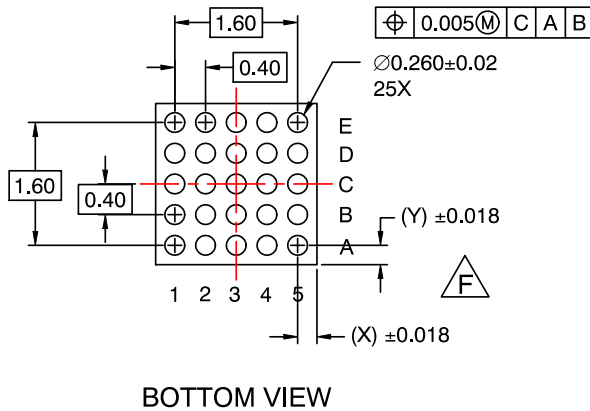

**NOTES:**

- A. NO JEDEC REGISTRATION APPLIES.
- B. DIMENSIONS ARE IN MILLIMETERS.
- C. DIMENSIONS AND TOLERANCE PER ASMEY14.5M, 1994.
- D. DATUM C IS DEFINED BY THE SPHERICAL CROWNS OF THE BALLS.
- E. PACKAGE NOMINAL HEIGHT IS 586 MICRONS ±39 MICRONS (547–625 MICRONS).
- F. FOR DIMENSIONS D, E, X, AND Y SEE PRODUCT DATASHEET.

|                         |                              |  |
|-------------------------|------------------------------|--|
| <b>DOCUMENT NUMBER:</b> | <b>98AON16612G</b>           | Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| <b>DESCRIPTION:</b>     | <b>WLCSP25 2.4x2.0x0.586</b> | <b>PAGE 1 OF 1</b>   |

ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.

**onsemi**, **Onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

---

## ADDITIONAL INFORMATION

### TECHNICAL PUBLICATIONS:

Technical Library: [www.onsemi.com/design/resources/technical-documentation](http://www.onsemi.com/design/resources/technical-documentation)  
onsemi Website: [www.onsemi.com](http://www.onsemi.com)

### ONLINE SUPPORT: [www.onsemi.com/support](http://www.onsemi.com/support)

For additional information, please contact your local Sales Representative at [www.onsemi.com/support/sales](http://www.onsemi.com/support/sales)

