Ultrafast Diode 80 A, 600 V

RURG8060

Description

The RURG8060 is an ultrafast diode with low forward voltage drop. This device is intended for use as freewheeling and clamping diodes in a variety of switching power supplies and other power switching applications. It is specially suited for use in switching power supplies and industrial application.

Features

- Ultrafast Recovery, $t_{rr} = 85 \text{ ns}$ (@ $I_F = 80 \text{ A}$)
- Max Forward Voltage, $V_F = 1.6 \text{ V}$ (@ $T_C = 25 \,^{\circ}\text{C}$)
- 600 V Reverse Voltage and High Reliability
- Avalanche Energy Rated
- This Device is Pb-Free and is RoHS Compliant

Applications

- Switching Power Supplies
- Power Switching Circuits
- General Purpose

ABSOLUTE MAXIMUM RATINGS (T_C = 25°C unless otherwise noted)


Rating	Symbol	Value	Unit
Peak Repetitive Reverse Voltage	V_{RRM}	600	V
Working Peak Reverse Voltage	V_{RWM}	600	V
DC Blocking Voltage	V_{R}	600	V
Average Rectified Forward Current $(T_C = 72 ^{\circ}C)$	I _{F(AV)}	80	Α
Repetitive Peak Surge Current (Square Wave, 20 kHz)	I _{FRM}	160	Α
Nonrepetitive Peak Surge Current (Halfwave 1 Phase, 60 Hz)	I _{FSM}	800	Α
Maximum Power Dissipation	P_{D}	180	W
Avalanche Energy (See Figure 7 and Figure 8)	E _{AVL}	50	mJ
Operating and Storage Temperature	T _{STG,} T _J	-65 to +175	°C

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.



ON Semiconductor®

www.onsemi.com




JEDEC STYLE 2 LEAD TO-247 340CL

MARKING DIAGRAM



\$Y = ON Semiconductor Logo &Z = Assembly Plant Code &3 = Numeric Date Code &K = Lot Code RURG80100 = Specific Device Code



ORDERING INFORMATION

See detailed ordering and shipping information on page 2 of this data sheet.

RURG8060

PACKAGE MARKING AND ORDERING INFORMATION

Part Number	Package	Brand
RURG8060	TO-247-2L	RURG8060


ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Symbol	Parameter	Test Conditions	Min	Тур	Max	Unit
V _F	V _F Instantaneous Forward Voltage (Pulse Width = 300 μs, Duty Cycle = 2%)	I _F = 80 A			1.6	V
		I _F = 80 A, T _C = 150°C			1.4	V
I _R	Instantaneous Reverse Current	V _R = 600 V			250	μΑ
		V _R = 600 V T _C = 150°C			2.0	mA
t _{rr}	Reverse Recovery Time (See Figure 6) Summation of $\mathbf{t_a} + \mathbf{t_b}$	$I_F = 1 A,$ $dI_F/dt = 100 A/\mu s$			75	ns
		I _F = 80 A, dI _F /dt = 100 A/μs			85	ns
t _a	Time to Reach Peak Reverse Current (See Figure 6)	I _F = 80 A, dI _F /dt = 100 A/μs		40		ns
t _b	Time from Peak I_{RM} to Projected Zero Crossing of I_{RM} Based on a Straight Line from Peak I_{RM} Through 25% of I_{RM} (See Figure 6)	I _F = 80 A, dI _F /dt = 100 A/μs		25		ns
$R_{ heta JC}$	Thermal Resistance Junction to Case				0.83	°C/W

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

RURG8060


TYPICAL PERFORMANCE CURVES



1000 175°C I_R, Reverse Current (μA) 100 10 100°C 0.1 25°C 0.01 100 200 300 400 500 600 V_R, Reverse Voltage (V)

Figure 1. Forward Current vs. Forward Voltage

Figure 2. Reverse Current vs. Reverse Voltage






Figure 3. t_{rr} , t_a and t_b Curves vs. Forward Current

Figure 4. Current Derating Curve

RURG8060

TEST CIRCUITS AND WAVEFORMS




Figure 5. T_{rr} Test Circuit




Figure 6. T_{rr} Waveforms and Definitions




Figure 7. Avalanche Energy Test Circuit





Figure 8. Avalanche Current and Voltage Waveforms


TO-247-2LD CASE 340CL **ISSUE A**



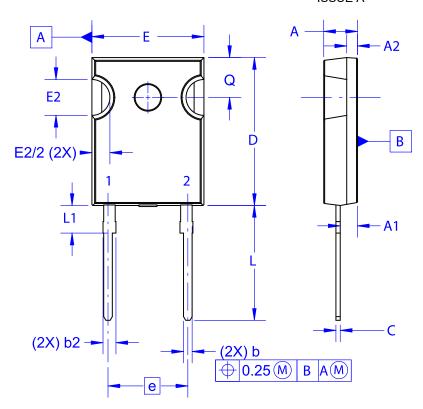

- A. DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD FLASH, AND TIE BAR EXTRUSIONS.
- B. ALL DIMENSIONS ARE IN MILLIMETERS.
- C. DRAWING CONFORMS TO ASME Y14.5 2009.
 D. DIMENSION A1 TO BE MEASURED IN THE REGION DEFINED BY L1.
- E. LEAD FINISH IS UNCONTROLLED IN THE REGION DEFINED BY L1.

GENERIC MARKING DIAGRAM*



XXXX = Specific Device Code

= Assembly Location

= Year

WW = Work Week

= Assembly Lot Code

*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "■", may or may not be present. Some products may not follow the Generic Marking.

	DATE 03 DEC 2019	
Ø P —		Ø P1 D2
E1 —	1	D1
,		9

DIM	MIL	LIMETER	IS		
	MIN	NOM	MAX		
Α	4.58	4.70	4.82		
A1	2.29	2.40	2.66		
A2	1.30	1.50	1.70		
b	1.17	1.26	1.35		
b2	1.53	1.65	1.77		
С	0.51	0.61	0.71		
D	20.32	20.57	20.82		
D1	16.37	16.57	16.77		
D2	0.51	0.93	1.35		
Е	15.37	15.62	15.87		
E1	12.81	~	~		
E2	4.96	5.08	5.20		
е	~	11.12	~		
L	15.75	16.00	16.25		
L1	3.69	3.81	3.93		
ØΡ	3.51	3.58	3.65		
ØP1	6.61	6.73	6.85		
Q	5.34	5.46	5.58		
S	5.34	5.46	5.58		

DOCUMENT NUMBER:	98AON13850G	Electronic versions are uncontrolled except when accessed directly from the Document Repositor Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.	
DESCRIPTION:	TO-247-2LD		PAGE 1 OF 1

ON Semiconductor and un are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.

onsemi, Onsemi, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. Onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA class 3 medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:

 $\textbf{Technical Library:} \ \underline{www.onsemi.com/design/resources/technical-documentation}$

onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at

www.onsemi.com/support/sales