onsemi

N-Channel JFET, 15 V, 10 to 32 mA, 38 mS

Automotive JFET designed for compact and efficient designs and

including high gain performance. AEC-Q101 qualified JFET and

NSVJ2394SA3

SC-59 / CP3 CASE 318BJ

MARKING DIAGRAM



YJ = Specific Device Code

ELECTRICAL CONNECTION

Ultralow Noise Figure
NSV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable

• This Small Package Enables Sets to be Smaller and Thinner

• These Devices are Pb-Free and are RoHS Compliant

PPAP capable suitable for automotive applications.

Applications

FeaturesLarge | yfs |Small Ciss


- AM Tuner RF Amplifier
- Low Noise Amplifier

Specifications

ABSOLUTE MAXIMUM RATINGS (at $T_A = 25^{\circ}C$)

Parameter	Symbol	Value	Unit				
Drain-to-Source Voltage	V _{DSX}	15	V				
Gate-to-Drain Voltage	V _{GDS}	-15	V				
Gate Current	I _G	10	mA				
Drain Current	۱ _D	50	mA				
Allowable Power Dissipation	PD	200	mW				
Operating Junction and Storage Temperature	T _J , T _{STG}	–55 to +150	°C				

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.



N-Channel

ORDERING INFORMATION

Device	Package	Shipping [†]
NSVJ2394SA3T1G	SC-59/CP3 (Pb-Free)	3000 / Tape & Reel

+For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specification Brochure, BRD8011/D.

NSVJ2394SA3


ELECTRICAL CHARACTERISTICS (at $T_A = 25^{\circ}C$)

Parameter	Symbol	Conditions	Min	Тур	Max	Unit
Gate-to-Drain Breakdown Voltage	V _{(BR)GDS}	$I_{G} = -10 \ \mu A, \ V_{DS} = 0 \ V$	–15	-	-	V
Gate Cutoff Current	I _{GSS}	$V_{GS} = -10 \text{ V}, \text{ V}_{DS} = 0 \text{ V}$	-	-	-1.0	nA
Cutoff Voltage	V _{GS(off)}	V _{DS} = 5 V, I _D = 100 μA	-0.3	-0.7	-1.5	V
Drain Current	I _{DSS}	$V_{DS} = 5 V, V_{GS} = 0 V$	10	-	32	mA
Forward Transfer Admittance	yfs	V_{DS} = 5 V, V_{GS} = 0 V, f = 1 kHz	20	38	-	mS
Input Capacitance	Ciss	V_{DS} = 5 V, V_{GS} = 0 V, f = 1 MHz	-	10	-	pF
Reverse Transfer Capacitance	Crss		-	2.9	-	pF
Noise Figure	NF	V_{DS} = 5 V, Rg = 1 k Ω , I _D = 1 mA, f = 1 kHz	-	1.0	-	dB

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.


NSVJ2394SA3

TYPICAL CHARACTERISTICS

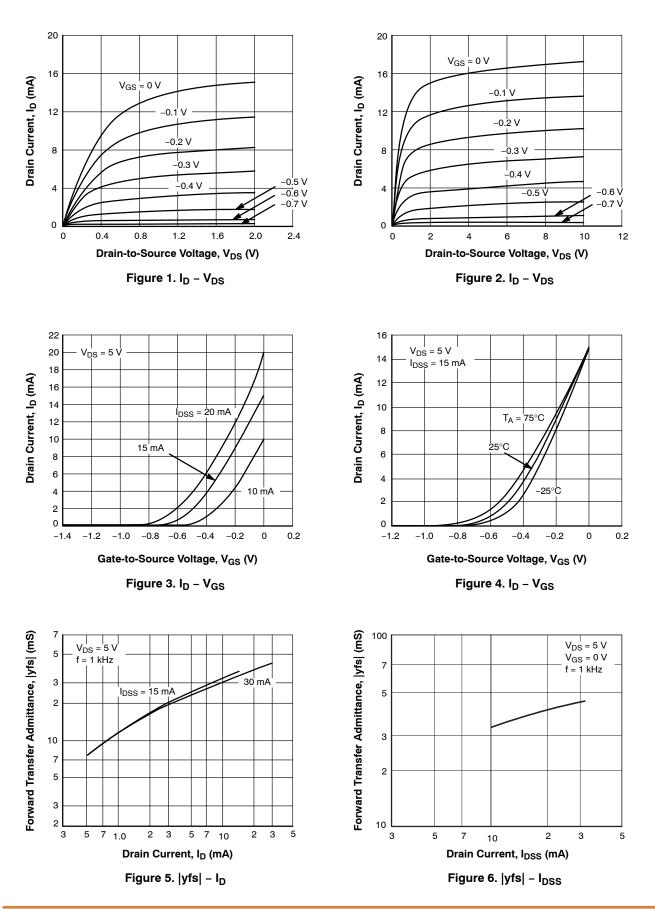


NSVJ2394SA3

TYPICAL CHARACTERISTICS (CONTINUED)

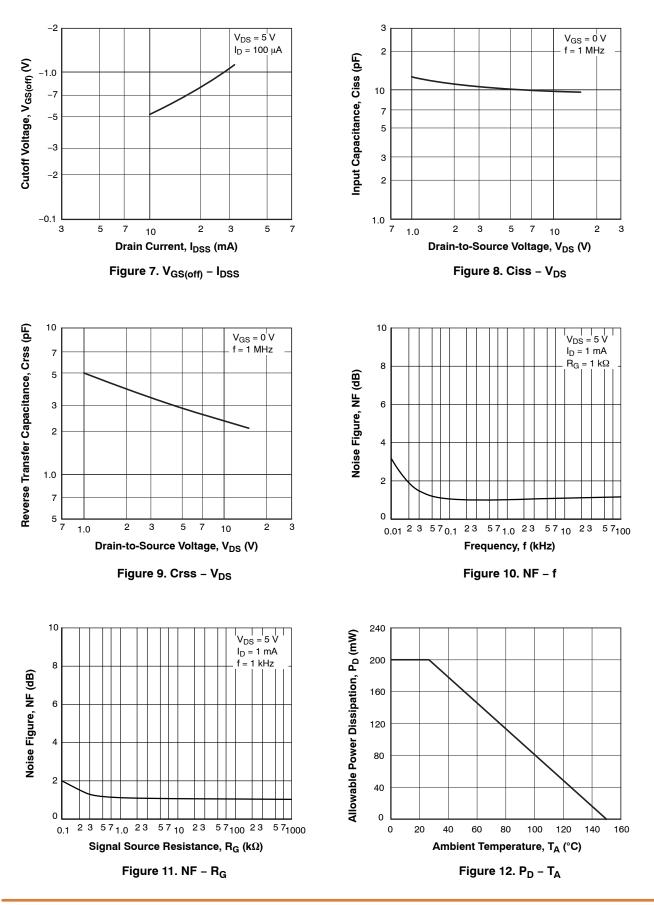



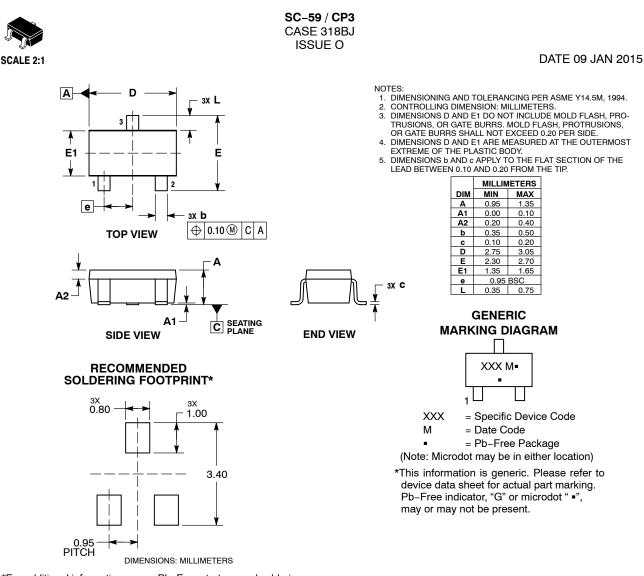

*For additional information on our Pb–Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

98AON94458F

SC-59 / CP3

ON Semiconductor and 💷 are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding

the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the

Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.

Electronic versions are uncontrolled except when accessed directly from the Document Repository.

DESCRIPTION:

DOCUMENT NUMBER:

rights of others.

PAGE 1 OF 1

onsemi, ONSEMI, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at <u>www.onsemi.com/site/pdf/Patent_Marking.pdf</u>. onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or indental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification. Buyer shall indemnify and hold onsemi and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs,

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:

Technical Library: www.onsemi.com/design/resources/technical-documentation onsemi Website: www.onsemi.com

ONLINE SUPPORT: <u>www.onsemi.com/support</u> For additional information, please contact your local Sales Representative at <u>www.onsemi.com/support/sales</u>