

# Analog Multiplexers / Demultiplexers with LSTTL Compatible Inputs

High-Performance Silicon-Gate CMOS

## MC74HCT4051A, MC74HCT4052A, MC74HCT4053A

The MC74HCT4051A, MC74HCT4052A and MC74HCT4053A utilize silicon-gate CMOS technology to achieve fast propagation delays, low ON resistances, and low OFF leakage currents. These analog multiplexers/demultiplexers control analog voltages that may vary across the complete power supply range (from  $V_{CC}$  to  $V_{EE}$ ).

The HCT4051A, HCT4052A and HCT4053A are identical in pinout to the metal-gate MC14051AB, MC14052AB and MC14053AB. The Channel-Select inputs determine which one of the Analog Inputs/Outputs is to be connected, by means of an analog switch, to the Common Output/Input. When the Enable pin is HIGH, all analog switches are turned off.

The Channel-Select and Enable inputs are compatible with standard CMOS and LSTTL outputs.


These devices have been designed so that the ON resistance ( $R_{ON}$ ) is more linear over input voltage than  $R_{ON}$  of metal-gate CMOS analog switches.

For a multiplexer/demultiplexer with injection current protection, see HC4851A and HCT4851A.


### Features

- Fast Switching and Propagation Speeds
- Low Crosstalk Between Switches
- Diode Protection on All Inputs/Outputs
- Analog Power Supply Range ( $V_{CC} - V_{EE}$ ) = 2.0 to 12.0 V
- Digital (Control) Power Supply Range ( $V_{CC} - GND$ ) = 2.0 to 6.0 V
- Improved Linearity and Lower ON Resistance Than Metal-Gate Counterparts
- Low Noise
- In Compliance with the Requirements of JEDEC Standard No. 7 A
- Chip Complexity: HCT4051A – 184 FETs or 46 Equivalent Gates  
HCT4052A – 168 FETs or 42 Equivalent Gates  
HCT4053A – 156 FETs or 39 Equivalent Gates
- NLV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q100 Qualified and PPAP Capable
- These Devices are Pb-Free and are RoHS Compliant


### MARKING DIAGRAMS



SOIC-16  
D SUFFIX  
CASE 751B



TSSOP-16  
DT SUFFIX  
CASE 948F



x = 1, 2, 3  
A = Assembly Location  
WL, L = Wafer Lot  
YY, Y = Year  
WW, W = Work Week  
G or ■ = Pb-Free Package


(Note: Microdot may be in either location)

### ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 13 of this data sheet.

NOTE: Some of the devices on this data sheet have been **DISCONTINUED**. Please refer to the table on page 13.

# MC74HCT4051A, MC74HCT4052A, MC74HCT4053A

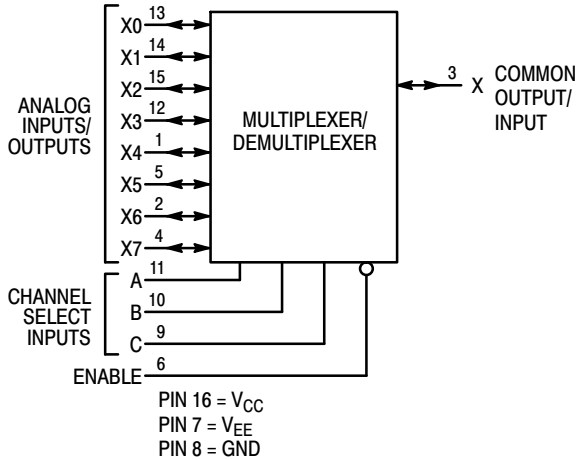


**Figure 1. Logic Diagram – MC74HCT4051A Single-Pole, 8-Position Plus Common Off**


**FUNCTION TABLE – MC74HCT4051A**

| Control Inputs |        | ON Channels |   |      |
|----------------|--------|-------------|---|------|
| Enable         | Select |             |   |      |
|                | C      | B           | A |      |
| L              | L      | L           | L | X0   |
| L              | L      | L           | H | X1   |
| L              | L      | H           | L | X2   |
| L              | L      | H           | H | X3   |
| L              | H      | L           | L | X4   |
| L              | H      | L           | H | X5   |
| L              | H      | H           | L | X6   |
| L              | H      | H           | H | X7   |
| H              | X      | X           | X | NONE |

X = Don't Care

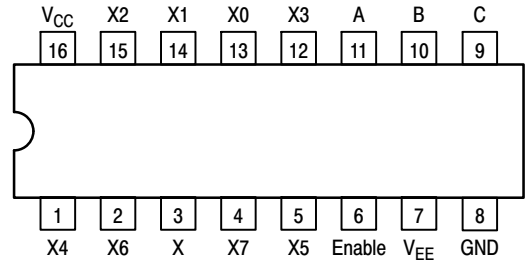

**Figure 2. Pinout: MC74HCT4051A (Top View)**

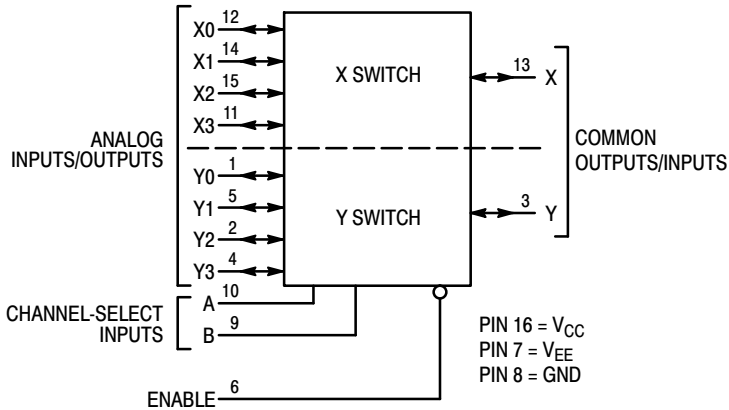


**Figure 3. Logic Diagram – MC74HCT4052A Double-Pole, 4-Position Plus Common Off**

**FUNCTION TABLE – MC74HCT4052A**


| Control Inputs |        | ON Channels |       |
|----------------|--------|-------------|-------|
| Enable         | Select |             |       |
|                | B      | A           |       |
| L              | L      | L           | Y0 X0 |
| L              | L      | H           | Y1 X1 |
| L              | H      | L           | Y2 X2 |
| L              | H      | H           | Y3 X3 |
| H              | X      | X           | NONE  |

X = Don't Care

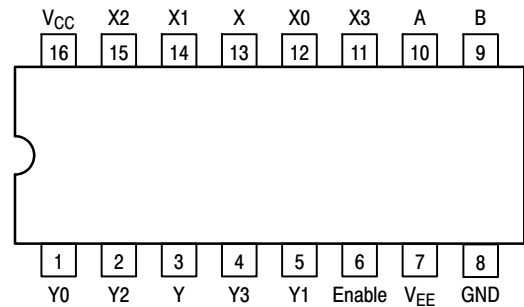

**Figure 4. Pinout: MC74HCT4052A (Top View)**

# MC74HCT4051A, MC74HCT4052A, MC74HCT4053A

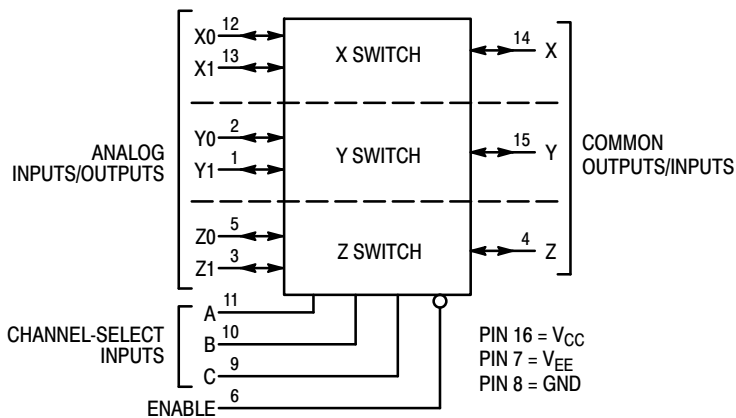


NOTE: This device allows independent control of each switch. Channel-Select Input A controls the X-Switch, Input B controls the Y-Switch and Input C controls the Z-Switch

**Figure 5. Logic Diagram – MC74HCT4053A Triple Single-Pole, Double-Position Plus Common Off**

**FUNCTION TABLE – MC74HCT4053A**

| Control Inputs |        |   | ON Channels |      |    |    |
|----------------|--------|---|-------------|------|----|----|
| Enable         | Select |   |             |      |    |    |
|                | C      | B | A           |      |    |    |
| L              | L      | L | L           | Z0   | Y0 | X0 |
| L              | L      | L | H           | Z0   | Y0 | X1 |
| L              | L      | H | L           | Z0   | Y1 | X0 |
| L              | L      | H | H           | Z0   | Y1 | X1 |
| L              | H      | L | L           | Z1   | Y0 | X0 |
| L              | H      | L | H           | Z1   | Y0 | X1 |
| L              | H      | H | L           | Z1   | Y1 | X0 |
| L              | H      | H | H           | Z1   | Y1 | X1 |
| H              | X      | X | X           | NONE |    |    |

X = Don't Care

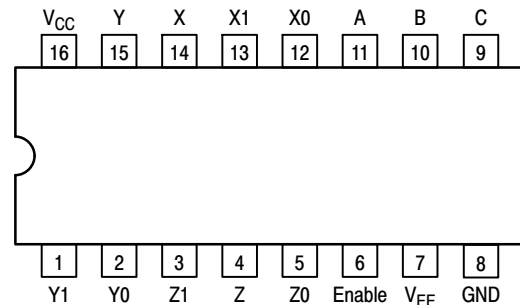

**Figure 6. Pinout: MC74HCT4053A (Top View)**

## MAXIMUM RATINGS

| Symbol           | Parameter  | Value   | Unit |
|------------------|--|---|------|
| V <sub>CC</sub>  | Positive DC Supply Voltage (Referenced to GND)<br>(Referenced to V <sub>EE</sub> ) | -0.5 to +7.0<br>-0.5 to +14.0                     | V    |
| V <sub>EE</sub>  | Negative DC Supply Voltage (Referenced to GND)                                     | -7.0 to +5.0                                      | V    |
| V <sub>IS</sub>  | Analog Input Voltage   | V <sub>EE</sub> - 0.5 to<br>V <sub>CC</sub> + 0.5 | V    |
| V <sub>in</sub>  | Digital Input Voltage (Referenced to GND)  | -0.5 to V <sub>CC</sub> + 0.5                     | V    |
| I                | DC Current, Into or Out of Any Pin   | ±25   | mA   |
| P <sub>D</sub>   | Power Dissipation in Still Air,<br>SOIC Package†<br>TSSOP Package†                 | 500<br>450  | mW   |
| T <sub>stg</sub> | Storage Temperature Range  | -65 to +150                                       | °C   |

This device contains protection circuitry to guard against damage due to high static voltages or electric fields. However, precautions must be taken to avoid applications of any voltage higher than maximum rated voltages to this high-impedance circuit. For proper operation, V<sub>in</sub> and V<sub>out</sub> should be constrained to the range GND ≤ (V<sub>in</sub> or V<sub>out</sub>) ≤ V<sub>CC</sub>.

Unused inputs must always be tied to an appropriate logic voltage level (e.g., either GND or V<sub>CC</sub>). Unused outputs must be left open.

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

†Derating – SOIC Package: - 7 mW/°C from 65°C to 125°C  
TSSOP Package: - 6.1 mW/°C from 65°C to 125°C

# MC74HCT4051A, MC74HCT4052A, MC74HCT4053A

## RECOMMENDED OPERATING CONDITIONS

| Symbol     | Parameter   | Min  | Max   | Unit |
|------------|---|--|---|------|
| $V_{CC}$   | Positive DC Supply Voltage (Referenced to GND)<br>(Referenced to $V_{EE}$ ) | 2.0<br>2.0   | 6.0<br>12.0                                   | V    |
| $V_{EE}$   | Negative DC Supply Voltage, Output (Referenced to GND)                      | -6.0   | GND   | V    |
| $V_{IS}$   | Analog Input Voltage  | $V_{EE}$   | $V_{CC}$                                      | V    |
| $V_{in}$   | Digital Input Voltage (Referenced to GND)                                   | GND  | $V_{CC}$                                      | V    |
| $V_{IO}^*$ | Static or Dynamic Voltage Across Switch                                     |  | 1.2   | V    |
| $T_A$      | Operating Temperature Range, All Package Types                              | -55  | +125  | °C   |
| $t_r, t_f$ | Input Rise/Fall Time<br>(Channel Select or Enable Inputs)                   | $V_{CC} = 2.0\text{ V}$<br>$V_{CC} = 3.0\text{ V}$<br>$V_{CC} = 4.5\text{ V}$<br>$V_{CC} = 6.0\text{ V}$ | 0<br>1000<br>0<br>600<br>0<br>500<br>0<br>400 | ns   |

\*For voltage drops across switch greater than 1.2 V (switch on), excessive  $V_{CC}$  current may be drawn; i.e., the current out of the switch may contain both  $V_{CC}$  and switch input components. The reliability of the device will be unaffected unless the Maximum Ratings are exceeded.

## DC CHARACTERISTICS – Digital Section (Voltages Referenced to GND) $V_{EE} = \text{GND}$ , Except Where Noted

| Symbol   | Parameter   | Condition  | $V_{CC}$<br>V                            | Guaranteed Limit |        |          | Unit     |    |
|----------|---|--|--|------------------|--------|----------|----------|----|
|          |   |  |  | -55 to 25°C      | ≤85°C  | ≤125°C   |          |    |
| $V_{IH}$ | Minimum High-Level Input Voltage, Channel-Select or Enable Inputs | $R_{on} = \text{Per Spec}$   | 4.5 to 5.5                               | 2.0              | 2.0    | 2.0      | V        |    |
| $V_{IL}$ | Maximum Low-Level Input Voltage, Channel-Select or Enable Inputs  | $R_{on} = \text{Per Spec}$   | 4.5 to 5.5                               | 0.8              | 0.8    | 0.8      | V        |    |
| $I_{in}$ | Maximum Input Leakage Current, Channel-Select or Enable Inputs    | $V_{in} = V_{CC}$ or GND,<br>$V_{EE} = -6.0\text{ V}$                            | 6.0                                      | ±0.1             | ±1.0   | ±1.0     | μA       |    |
| $I_{CC}$ | Maximum Quiescent Supply Current (per Package)                    | Channel Select, Enable and<br>$V_{IS} = V_{CC}$ or GND;<br>$V_{IO} = 0\text{ V}$ | $V_{EE} = \text{GND}$<br>$V_{EE} = -6.0$ | 6.0<br>6.0       | 1<br>4 | 10<br>40 | 20<br>80 | μA |

## DC CHARACTERISTICS – Analog Section

| Symbol          | Parameter  | Condition  | $V_{CC}$  | $V_{EE}$ | Guaranteed Limit |       |        | Unit |
|-----------------|--|--|---|----------|------------------|-------|--------|------|
|                 |  |  |   |          | -55 to 25°C      | ≤85°C | ≤125°C |      |
| $R_{on}$        | Maximum "ON" Resistance  | $V_{in} = V_{IL}$ or $V_{IH}$ ; $V_{IS} = V_{CC}$ to $V_{EE}$ ; $I_S \leq 2.0\text{ mA}$<br>(Figures 7, 8)                   | 4.5   | 0.0      | 190              | 240   | 280    | Ω    |
|                 |  |  | 4.5   | -4.5     | 120              | 150   | 170    |      |
|                 |  | 6.0  | -6.0  | 100      | 125              | 140   |        |      |
|                 |  | $V_{in} = V_{IL}$ or $V_{IH}$ ; $V_{IS} = V_{CC}$ or $V_{EE}$ (Endpoints); $I_S \leq 2.0\text{ mA}$<br>(Figures 7, 8)        | 4.5   | 0.0      | 150              | 190   | 230    |      |
| 4.5             | -4.5   |  | 100   | 125      | 140              |       |        |      |
| $\Delta R_{on}$ | Maximum Difference in "ON" Resistance Between Any Two Channels in the Same Package | $V_{in} = V_{IL}$ or $V_{IH}$ ;<br>$V_{IS} = 1/2 (V_{CC} - V_{EE})$ ;<br>$I_S \leq 2.0\text{ mA}$                            | 4.5   | 0.0      | 30               | 35    | 40     | Ω    |
|                 |  |  | 4.5   | -4.5     | 12               | 15    | 18     |      |
|                 |  |  | 6.0   | -6.0     | 10               | 12    | 14     |      |
| $I_{off}$       | Maximum Off-Channel Leakage Current, Any One Channel                               | $V_{in} = V_{IL}$ or $V_{IH}$ ;<br>$V_{IO} = V_{CC} - V_{EE}$ ;<br>Switch Off (Figure 9)                                     | 5.0   | -5.0     | 0.1              | 0.5   | 1.0    | μA   |
|                 |  |  | Maximum Off-Channel Leakage Current, Common Channel | HCT4051A | 5.0              | -5.0  | 0.2    |      |
|                 | HCT4052A   | 5.0  |   | -5.0     | 0.1              | 1.0   | 2.0    |      |
|                 | HCT4053A   | 5.0  |   | -5.0     | 0.1              | 1.0   | 2.0    |      |
| $I_{on}$        | Maximum On-Channel Leakage Current, Channel-to-Channel                             | HCT4051A<br>HCT4052A<br>HCT4053A<br>$V_{in} = V_{IL}$ or $V_{IH}$ ;<br>Switch-to-Switch =<br>$V_{CC} - V_{EE}$ ; (Figure 11) | 5.0   | -5.0     | 0.2              | 2.0   | 4.0    | μA   |
|                 |  |  | 5.0   | -5.0     | 0.1              | 1.0   | 2.0    |      |
|                 |  |  | 5.0   | -5.0     | 0.1              | 1.0   | 2.0    |      |
|                 |  |  | 5.0   | -5.0     | 0.1              | 1.0   | 2.0    |      |

# MC74HCT4051A, MC74HCT4052A, MC74HCT4053A

## AC CHARACTERISTICS (C<sub>L</sub> = 50 pF, Input t<sub>r</sub> = t<sub>f</sub> = 6 ns)

| Symbol                                 | Parameter   | V <sub>CC</sub><br>V | Guaranteed Limit |       |        | Unit |
|--|---|----------------------|------------------|-------|--------|------|
|  |   |                      | -55 to 25°C      | ≤85°C | ≤125°C |      |
| t <sub>PLH</sub> ,<br>t <sub>PHL</sub> | Maximum Propagation Delay, Channel–Select to Analog Output<br>(Figure 15) | 2.0                  | 270              | 320   | 350    | ns   |
|  |   | 3.0                  | 90               | 110   | 125    |      |
|  |   | 4.5                  | 59               | 79    | 85     |      |
|  |   | 6.0                  | 45               | 65    | 75     |      |
| t <sub>PLH</sub> ,<br>t <sub>PHL</sub> | Maximum Propagation Delay, Analog Input to Analog Output<br>(Figure 16)   | 2.0                  | 40               | 60    | 70     | ns   |
|  |   | 3.0                  | 25               | 30    | 32     |      |
|  |   | 4.5                  | 12               | 15    | 18     |      |
|  |   | 6.0                  | 10               | 13    | 15     |      |
| t <sub>PLZ</sub> ,<br>t <sub>PHZ</sub> | Maximum Propagation Delay, Enable to Analog Output<br>(Figure 17)         | 2.0                  | 160              | 200   | 220    | ns   |
|  |   | 3.0                  | 70               | 95    | 110    |      |
|  |   | 4.5                  | 48               | 63    | 76     |      |
|  |   | 6.0                  | 39               | 55    | 63     |      |
| t <sub>PZL</sub> ,<br>t <sub>PZH</sub> | Maximum Propagation Delay, Enable to Analog Output<br>(Figure 17)         | 2.0                  | 245              | 315   | 345    | ns   |
|  |   | 3.0                  | 115              | 145   | 155    |      |
|  |   | 4.5                  | 49               | 69    | 83     |      |
|  |   | 6.0                  | 39               | 58    | 67     |      |
| C <sub>in</sub>                        | Maximum Input Capacitance, Channel–Select or Enable Inputs                |                      | 10               | 10    | 10     | pF   |
| C <sub>I/O</sub>                       | Maximum Capacitance<br>(All Switches Off)                                 | Analog I/O           | 35               | 35    | 35     | pF   |
|  |   | Common O/I: HCT4051A | 130              | 130   | 130    |      |
|  |   | HCT4052A             | 80               | 80    | 80     |      |
|  |   | HCT4053A             | 50               | 50    | 50     |      |
|  | Feed-through  |                      | 1.0              | 1.0   | 1.0    |      |

| C <sub>PD</sub> | Power Dissipation Capacitance (Figure 19)* | HCT4051A<br>HCT4052A<br>HCT4053A | Typical @ 25°C, V <sub>CC</sub> = 5.0 V, V <sub>EE</sub> = 0 V |  |  | pF |
|-----------------|--|----------------------------------|--|--|--|----|
|                 |  |                                  |  |  |  |    |
|                 |  |                                  | 45   |  |  |    |
|                 |  |                                  | 80   |  |  |    |
|                 |  |                                  | 45   |  |  |    |

\*Used to determine the no-load dynamic power consumption: P<sub>D</sub> = C<sub>PD</sub> V<sub>CC</sub><sup>2</sup>f + I<sub>CC</sub> V<sub>CC</sub>.

# MC74HCT4051A, MC74HCT4052A, MC74HCT4053A

## ADDITIONAL APPLICATION CHARACTERISTICS (GND = 0 V)

| Symbol | Parameter  | Condition  | V <sub>CC</sub><br>V | V <sub>EE</sub><br>V | Limit* |     |     | Unit             |
|--------|--|--|----------------------|----------------------|--------|-----|-----|------------------|
|        |  |  |                      |                      | 25°C   |     |     |                  |
| BW     | Maximum On-Channel Bandwidth or Minimum Frequency Response (Figure 12)           | f <sub>in</sub> = 1 MHz Sine Wave; Adjust f <sub>in</sub> Voltage to Obtain 0 dBm at V <sub>OS</sub> ; Increase f <sub>in</sub> Frequency Until dB Meter Reads -3 dB; R <sub>L</sub> = 50 Ω, C <sub>L</sub> = 10 pF  | 2.25                 | -2.25                | '51    | '52 | '53 | MHz              |
|        |  |  | 4.50                 | -4.50                | 80     | 95  | 120 |                  |
|        |  |  | 6.00                 | -6.00                | 80     | 95  | 120 |                  |
| -      | Off-Channel Feed-through Isolation (Figure 13)                                   | f <sub>in</sub> = Sine Wave; Adjust f <sub>in</sub> Voltage to Obtain 0 dBm at V <sub>IS</sub><br>f <sub>in</sub> = 10 kHz, R <sub>L</sub> = 600 Ω, C <sub>L</sub> = 50 pF   | 2.25                 | -2.25                | -50    |     |     | dB               |
|        |  |  | 4.50                 | -4.50                | -50    |     |     |                  |
|        |  |  | 6.00                 | -6.00                | -50    |     |     |                  |
| -      | Feedthrough Noise. Channel-Select Input to Common I/O (Figure 14)                | V <sub>in</sub> ≤ 1 MHz Square Wave (t <sub>r</sub> = t <sub>f</sub> = 6 ns); Adjust R <sub>L</sub> at Setup so that I <sub>S</sub> = 0 A; Enable = GND R <sub>L</sub> = 600 Ω, C <sub>L</sub> = 50 pF   | 2.25                 | -2.25                | 25     |     |     | mV <sub>PP</sub> |
|        |  |  | 4.50                 | -4.50                | 105    |     |     |                  |
|        |  |  | 6.00                 | -6.00                | 135    |     |     |                  |
| -      | Crosstalk Between Any Two Switches (Figure 18) (Test does not apply to HCT4051A) | f <sub>in</sub> = Sine Wave; Adjust f <sub>in</sub> Voltage to Obtain 0 dBm at V <sub>IS</sub><br>f <sub>in</sub> = 10 kHz, R <sub>L</sub> = 600 Ω, C <sub>L</sub> = 50 pF   | 2.25                 | -2.25                | -50    |     |     | dB               |
|        |  |  | 4.50                 | -4.50                | -50    |     |     |                  |
|        |  |  | 6.00                 | -6.00                | -50    |     |     |                  |
| -      | Crosstalk Between Any Two Switches (Figure 18) (Test does not apply to HCT4051A) | f <sub>in</sub> = 1.0 MHz, R <sub>L</sub> = 50 Ω, C <sub>L</sub> = 10 pF   | 2.25                 | -2.25                | -40    |     |     | dB               |
|        |  |  | 4.50                 | -4.50                | -40    |     |     |                  |
|        |  |  | 6.00                 | -6.00                | -40    |     |     |                  |
| THD    | Total Harmonic Distortion (Figure 20)  | f <sub>in</sub> = 1 kHz, R <sub>L</sub> = 10 kΩ, C <sub>L</sub> = 50 pF<br>THD = THD <sub>measured</sub> - THD <sub>source</sub><br>V <sub>IS</sub> = 4.0 V <sub>PP</sub> sine wave<br>V <sub>IS</sub> = 8.0 V <sub>PP</sub> sine wave<br>V <sub>IS</sub> = 11.0 V <sub>PP</sub> sine wave | 2.25                 | -2.25                | 0.10   |     |     | %                |
|        |  |  | 4.50                 | -4.50                | 0.08   |     |     |                  |
|        |  |  | 6.00                 | -6.00                | 0.05   |     |     |                  |

\*Limits not tested. Determined by design and verified by qualification.

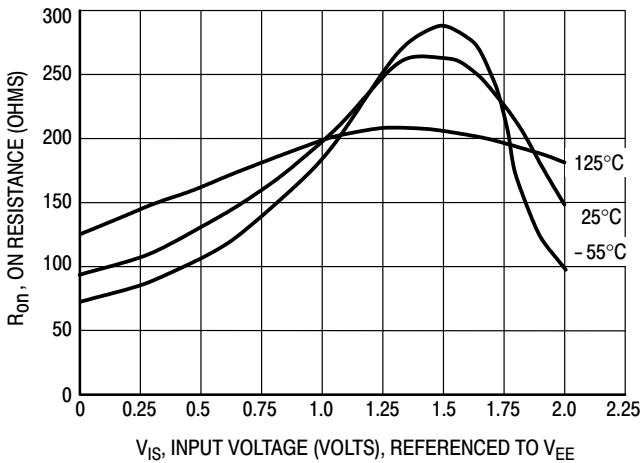


Figure 7a. Typical On Resistance, V<sub>CC</sub> - V<sub>EE</sub> = 2.0 V

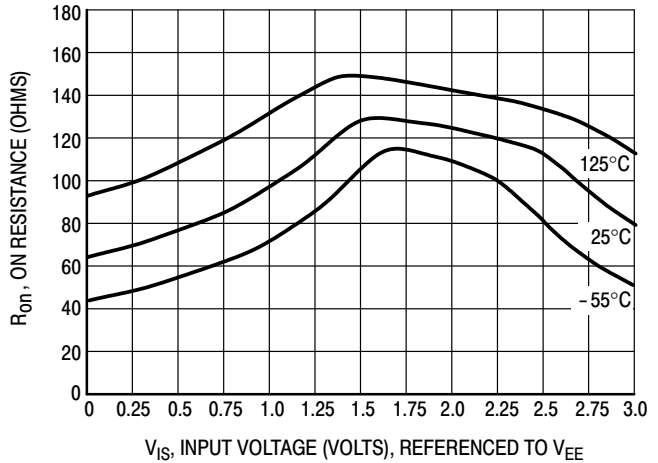


Figure 7b. Typical On Resistance, V<sub>CC</sub> - V<sub>EE</sub> = 3.0 V

# MC74HCT4051A, MC74HCT4052A, MC74HCT4053A



Figure 7c. Typical On Resistance,  $V_{CC} - V_{EE} = 4.5 \text{ V}$



Figure 7d. Typical On Resistance,  $V_{CC} - V_{EE} = 6.0 \text{ V}$

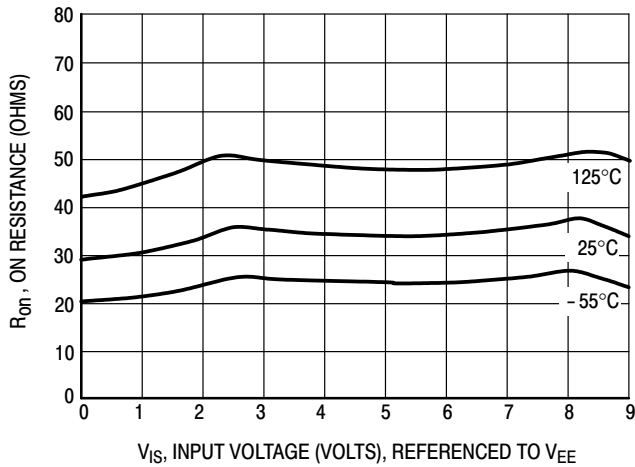


Figure 7e. Typical On Resistance,  $V_{CC} - V_{EE} = 9.0 \text{ V}$

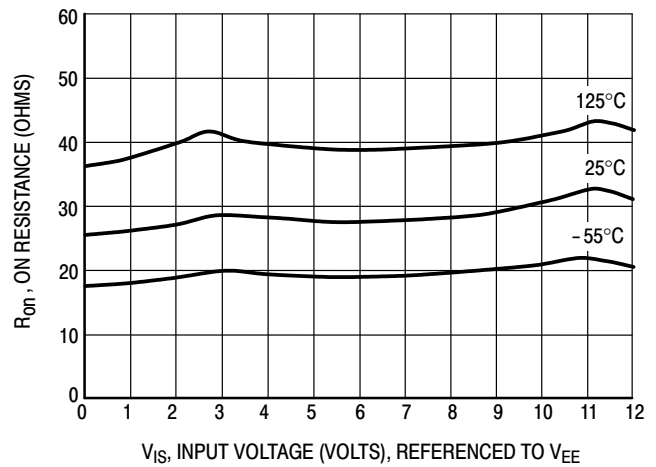


Figure 7f. Typical On Resistance,  $V_{CC} - V_{EE} = 12.0 \text{ V}$

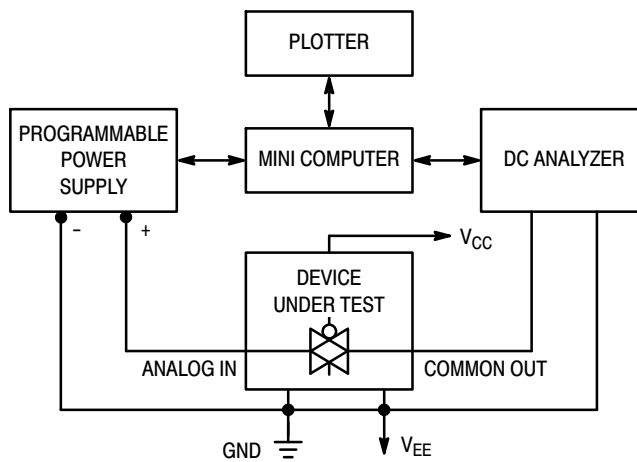


Figure 8. On Resistance Test Set-Up

# MC74HCT4051A, MC74HCT4052A, MC74HCT4053A

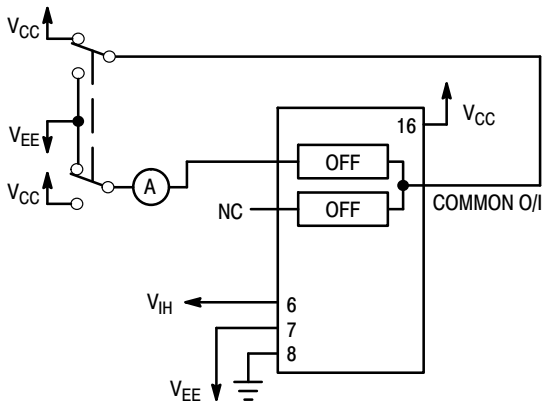


Figure 9. Maximum Off Channel Leakage Current, Any One Channel, Test Set-Up

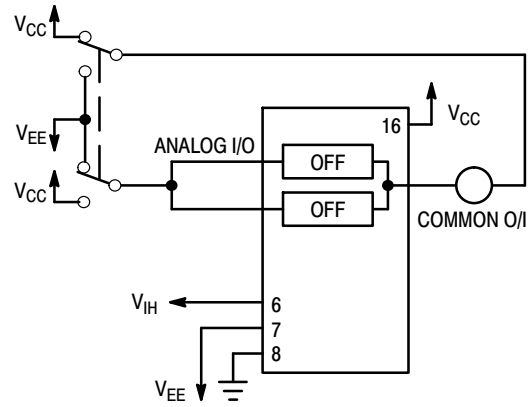


Figure 10. Maximum Off Channel Leakage Current, Common Channel, Test Set-Up



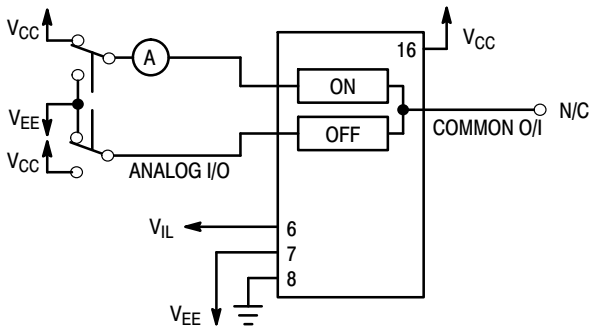


Figure 11. Maximum On Channel Leakage Current, Channel to Channel, Test Set-Up

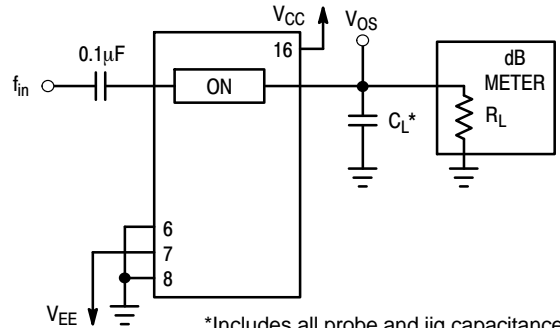


\*Includes all probe and jig capacitance

Figure 12. Maximum On Channel Bandwidth, Test Set-Up

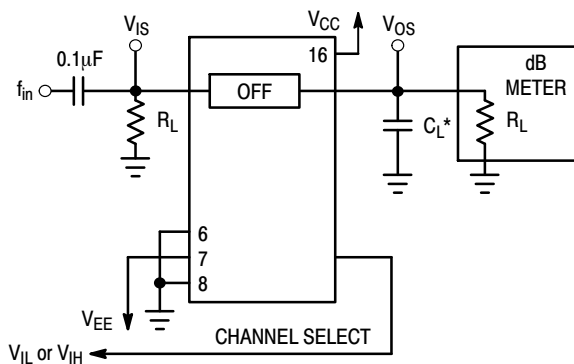

\*Includes all probe and jig capacitance

Figure 13. Off Channel Feedthrough Isolation, Test Set-Up

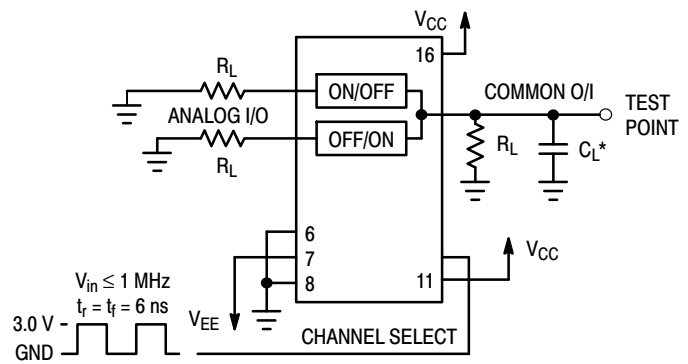


\*Includes all probe and jig capacitance

Figure 14. Feedthrough Noise, Channel Select to Common Out, Test Set-Up



# MC74HCT4051A, MC74HCT4052A, MC74HCT4053A

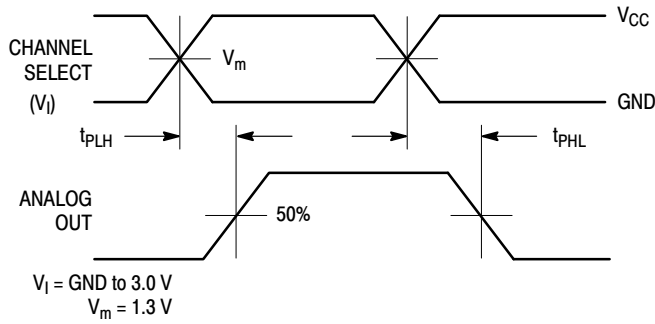

**Figure 15a. Propagation Delays, Channel Select to Analog Out**



\*Includes all probe and jig capacitance

**Figure 15b. Propagation Delay, Test Set-Up Channel Select to Analog Out**




**Figure 16a. Propagation Delays, Analog In to Analog Out**




\*Includes all probe and jig capacitance

**Figure 16b. Propagation Delay, Test Set-Up Analog In to Analog Out**

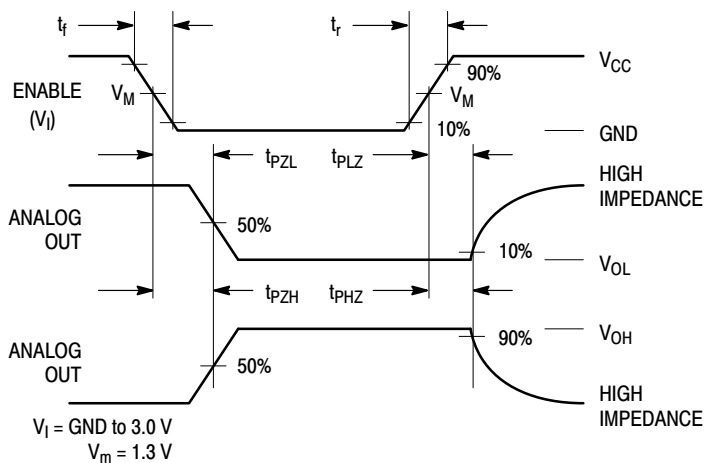


**Figure 17a. Propagation Delays, Enable to Analog Out**

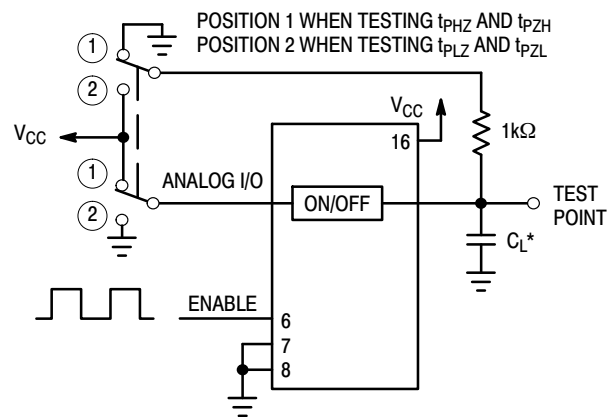


**Figure 17b. Propagation Delay, Test Set-Up Enable to Analog Out**

## MC74HCT4051A, MC74HCT4052A, MC74HCT4053A

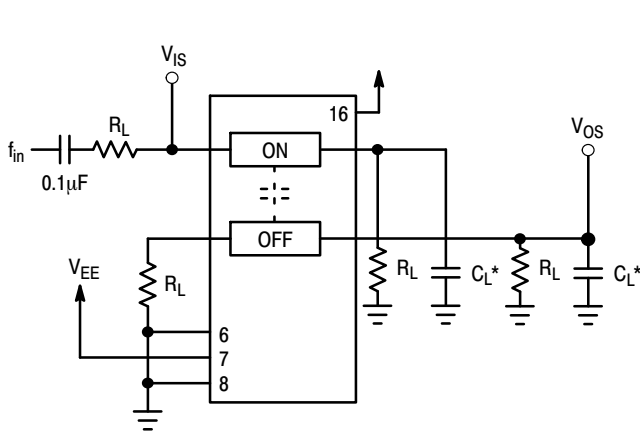


\*Includes all probe and jig capacitance

**Figure 18. Crosstalk Between Any Two Switches, Test Set-Up**

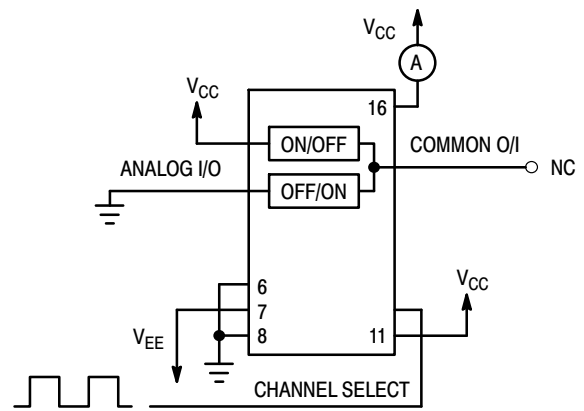


**Figure 19. Power Dissipation Capacitance, Test Set-Up**

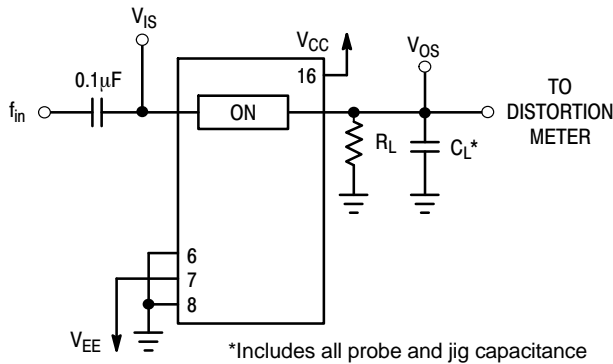

\*Includes all probe and jig capacitance

**Figure 20a. Total Harmonic Distortion, Test Set-Up**

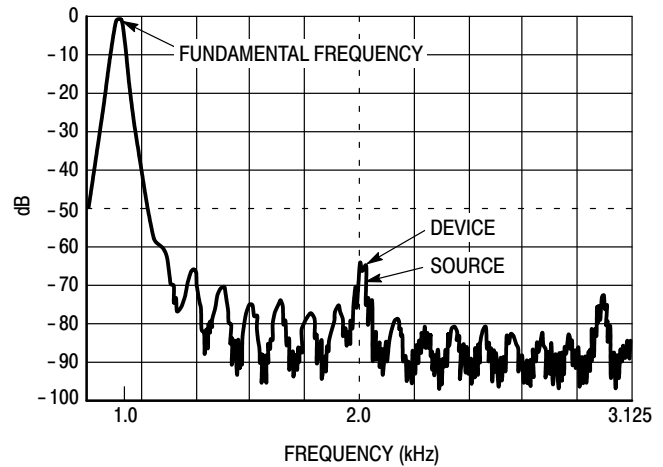

**Figure 20b. Plot, Harmonic Distortion**

## APPLICATIONS INFORMATION

The maximum analog voltage swings are determined by the supply voltages  $V_{CC}$  and  $V_{EE}$ . The positive peak analog voltage should not exceed  $V_{CC}$ . Similarly, the negative peak analog voltage should not go below  $V_{EE}$ . In this example, the difference between  $V_{CC}$  and  $V_{EE}$  is ten volts. Therefore, using the configuration of Figure 21, a maximum analog signal of ten volts peak-to-peak can be controlled. Unused analog inputs/outputs may be left floating (i.e., not connected). However, tying unused analog inputs and outputs to  $V_{CC}$  or GND through a low value resistor helps minimize crosstalk and feed-through noise that may be picked up by an unused switch.

Although used here, balanced supplies are not a requirement. The only constraints on the power supplies are that:

$$\begin{aligned} V_{CC} - \text{GND} &= 2 \text{ to } 6 \text{ V} \\ V_{EE} - \text{GND} &= 0 \text{ to } -6 \text{ V} \\ V_{CC} - V_{EE} &= 2 \text{ to } 12 \text{ V} \\ &\text{and } V_{EE} \leq \text{GND} \end{aligned}$$

When voltage transients above  $V_{CC}$  and/or below  $V_{EE}$  are anticipated on the analog channels, external Germanium or Schottky diodes ( $D_x$ ) are recommended as shown in Figure 22. These diodes should be able to absorb the maximum anticipated current surges during clipping.

# MC74HCT4051A, MC74HCT4052A, MC74HCT4053A

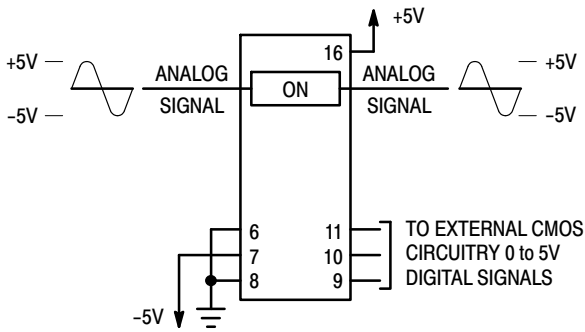


Figure 21. Application Example



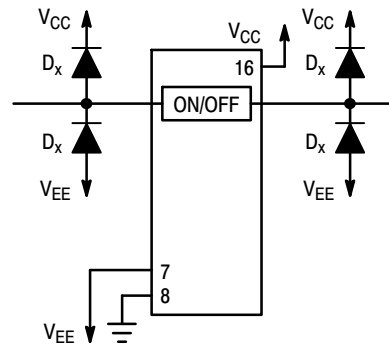


Figure 22. External Germanium or Schottky Clipping Diodes

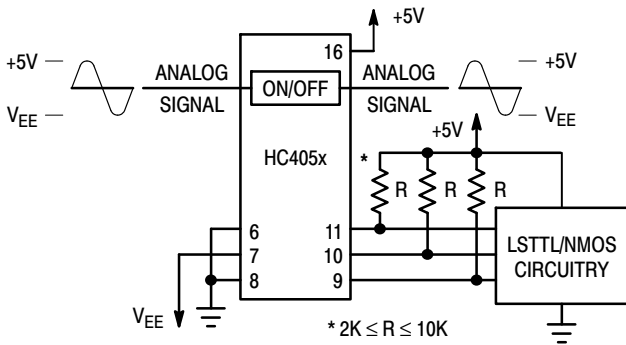

a. Using Pull-Up Resistors with a HC Device

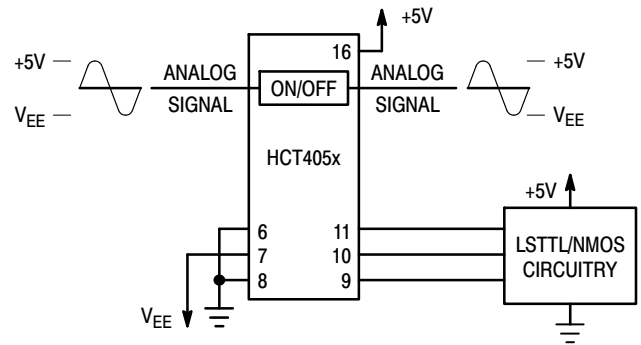

b. Using HCT Interface

Figure 23. Interfacing LSTTL/NMOS to CMOS Inputs

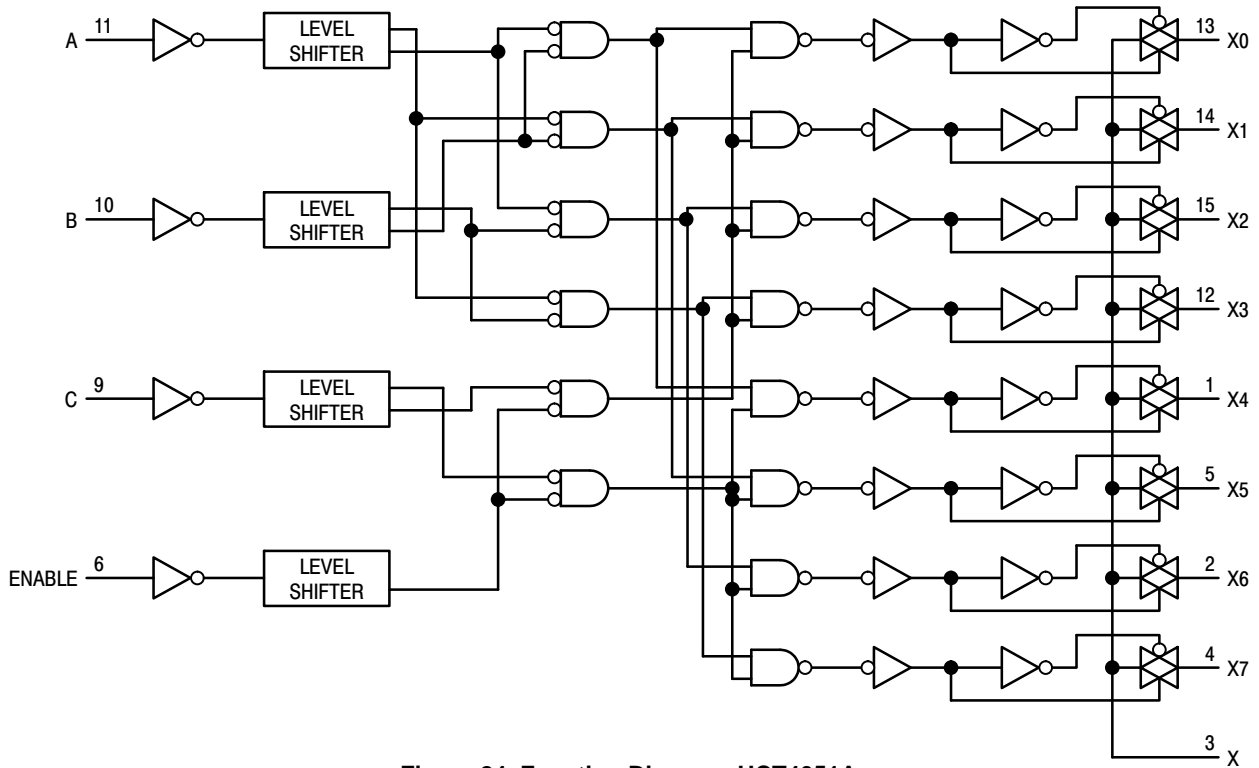


Figure 24. Function Diagram, HCT4051A

MC74HCT4051A, MC74HCT4052A, MC74HCT4053A

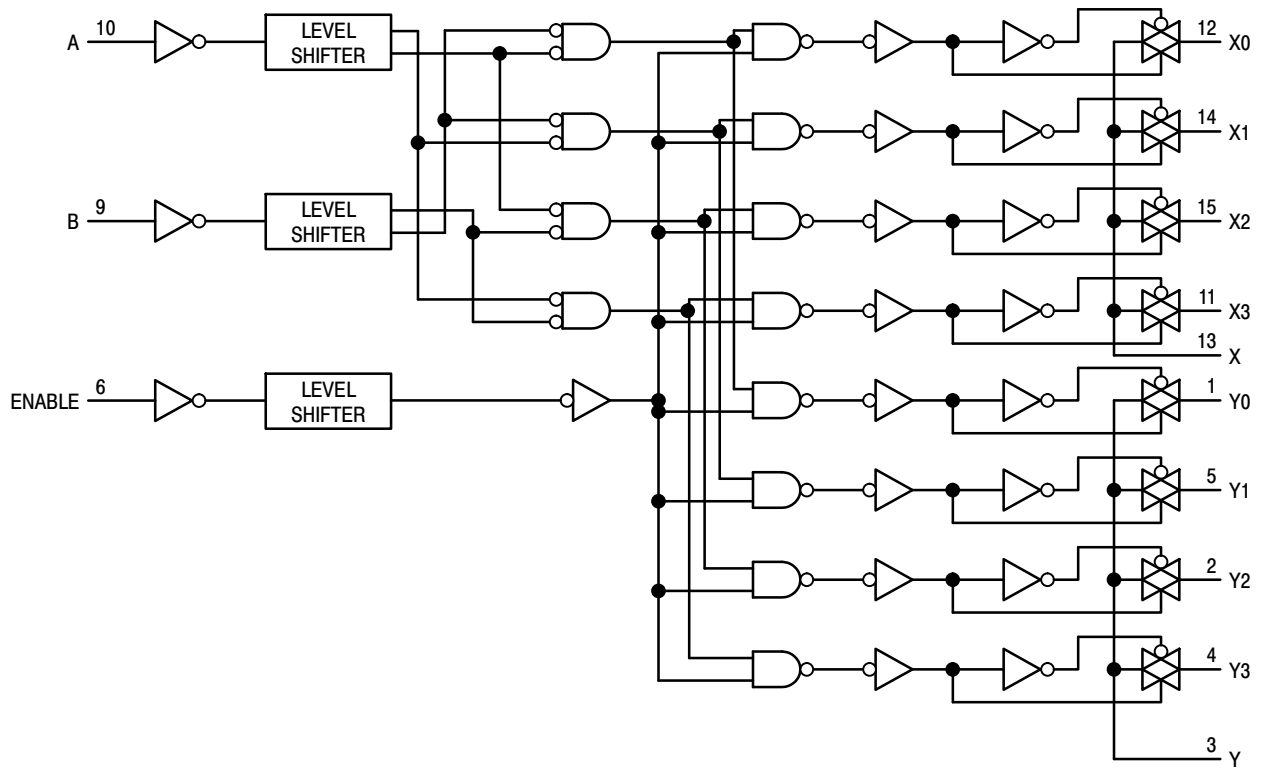


Figure 26. Function Diagram, HCT4052A

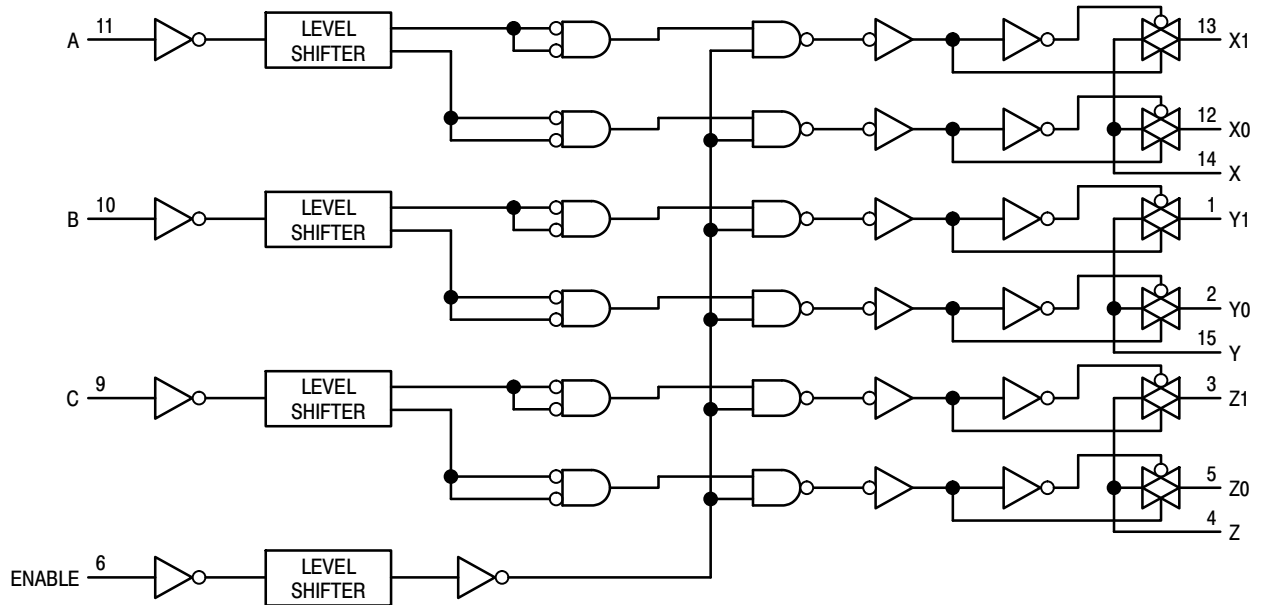


Figure 25. Function Diagram, HCT4053A

## MC74HCT4051A, MC74HCT4052A, MC74HCT4053A

### ORDERING INFORMATION

| Device           | Package               | Shipping†          |
|------------------|-----------------------|--------------------|
| MC74HCT4051ADG   | SOIC-16<br>(Pb-Free)  | 48 Units / Rail    |
| MC74HCT4051ADR2G | SOIC-16<br>(Pb-Free)  | 2500 / Tape & Reel |
| MC74HCT4052ADR2G | SOIC-16<br>(Pb-Free)  | 2500 / Tape & Reel |
| M74HCT4052ADTR2G | TSSOP-16<br>(Pb-Free) | 2500 / Tape & Reel |
| MC74HCT4053ADR2G | SOIC-16<br>(Pb-Free)  | 2500 / Tape & Reel |
| M74HCT4053ADTR2G | TSSOP-16<br>(Pb-Free) | 2500 / Tape & Reel |

### DISCONTINUED (Note 1)

|                     |                       |                    |
|---------------------|-----------------------|--------------------|
| MC74HCT4051ADTG     | TSSOP-16<br>(Pb-Free) | 96 Units / Rail    |
| M74HCT4051ADTR2G    | TSSOP-16<br>(Pb-Free) | 2500 / Tape & Reel |
| NLV74HCT4051ADTR2G* | TSSOP-16<br>(Pb-Free) | 2500 / Tape & Reel |

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

\*NLV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q100 Qualified and PPAP Capable.

1. **DISCONTINUED:** These devices are not recommended for new design. Please contact your **onsemi** representative for information. The most current information on these devices may be available on [www.onsemi.com](http://www.onsemi.com).

# MECHANICAL CASE OUTLINE PACKAGE DIMENSIONS



**SOIC-16 9.90x3.90x1.50 1.27P**  
CASE 751B  
ISSUE L

DATE 29 MAY 2024

**NOTES:**

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 2018.
2. DIMENSION IN MILLIMETERS. ANGLE IN DEGREES.
3. DIMENSIONS D AND E1 DO NOT INCLUDE MOLD PROTRUSION.
4. MAXIMUM MOLD PROTRUSION 0.15mm PER SIDE.
5. DIMENSION b DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.127mm TOTAL IN EXCESS OF THE b DIMENSION AT MAXIMUM MATERIAL CONDITION.



| MILLIMETERS                    |          |      |      |
|--------------------------------|----------|------|------|
| DIM                            | MIN      | NOM  | MAX  |
| A                              | 1.35     | 1.55 | 1.75 |
| A1                             | 0.00     | 0.05 | 0.10 |
| A2                             | 1.35     | 1.50 | 1.65 |
| b                              | 0.35     | 0.42 | 0.49 |
| c                              | 0.19     | 0.22 | 0.25 |
| D                              | 9.90 BSC |      |      |
| E                              | 6.00 BSC |      |      |
| E1                             | 3.90 BSC |      |      |
| e                              | 1.27 BSC |      |      |
| h                              | 0.25     | ---  | 0.50 |
| L                              | 0.40     | 0.83 | 1.25 |
| L1                             | 1.05 REF |      |      |
| θ                              | 0°       | ---  | 7°   |
| TOLERANCE OF FORM AND POSITION |          |      |      |
| aaa                            | 0.10     |      |      |
| bbb                            | 0.20     |      |      |
| ccc                            | 0.10     |      |      |
| ddd                            | 0.25     |      |      |
| eee                            | 0.10     |      |      |



**RECOMMENDED MOUNTING FOOTPRINT**

\*FOR ADDITIONAL INFORMATION ON OUR PB-FREE STRATEGY AND SOLDERING DETAILS, PLEASE DOWNLOAD THE onsemi SOLDERING AND MOUNTING TECHNIQUES REFERENCE MANUAL, SOLDERRM/D


|                         |                                     |  |
|-------------------------|-------------------------------------|--|
| <b>DOCUMENT NUMBER:</b> | <b>98ASB42566B</b>                  | Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| <b>DESCRIPTION:</b>     | <b>SOIC-16 9.90X3.90X1.50 1.27P</b> | <b>PAGE 1 OF 2</b>   |

onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

**SOIC-16 9.90x3.90x1.50 1.27P**  
**CASE 751B**  
**ISSUE L**

DATE 29 MAY 2024

**GENERIC MARKING DIAGRAM\***



XXXXX = Specific Device Code  
 A = Assembly Location  
 WL = Wafer Lot  
 Y = Year  
 WW = Work Week  
 G = Pb-Free Package

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "•", may or may not be present. Some products may not follow the Generic Marking.

|   |   |   |   |
|---|---|---|---|
| <p><b>STYLE 1:</b></p> <p>PIN 1. COLLECTOR<br/>                 2. BASE<br/>                 3. EMITTER<br/>                 4. NO CONNECTION<br/>                 5. EMITTER<br/>                 6. BASE<br/>                 7. COLLECTOR<br/>                 8. COLLECTOR<br/>                 9. BASE<br/>                 10. EMITTER<br/>                 11. NO CONNECTION<br/>                 12. EMITTER<br/>                 13. BASE<br/>                 14. COLLECTOR<br/>                 15. EMITTER<br/>                 16. COLLECTOR</p>                           | <p><b>STYLE 2:</b></p> <p>PIN 1. CATHODE<br/>                 2. ANODE<br/>                 3. NO CONNECTION<br/>                 4. CATHODE<br/>                 5. CATHODE<br/>                 6. NO CONNECTION<br/>                 7. ANODE<br/>                 8. CATHODE<br/>                 9. CATHODE<br/>                 10. ANODE<br/>                 11. NO CONNECTION<br/>                 12. CATHODE<br/>                 13. CATHODE<br/>                 14. NO CONNECTION<br/>                 15. ANODE<br/>                 16. CATHODE</p> | <p><b>STYLE 3:</b></p> <p>PIN 1. COLLECTOR, DYE #1<br/>                 2. BASE, #1<br/>                 3. EMITTER, #1<br/>                 4. COLLECTOR, #1<br/>                 5. COLLECTOR, #2<br/>                 6. BASE, #2<br/>                 7. EMITTER, #2<br/>                 8. COLLECTOR, #2<br/>                 9. COLLECTOR, #3<br/>                 10. BASE, #3<br/>                 11. EMITTER, #3<br/>                 12. COLLECTOR, #3<br/>                 13. COLLECTOR, #4<br/>                 14. BASE, #4<br/>                 15. EMITTER, #4<br/>                 16. COLLECTOR, #4</p>   | <p><b>STYLE 4:</b></p> <p>PIN 1. COLLECTOR, DYE #1<br/>                 2. COLLECTOR, #1<br/>                 3. COLLECTOR, #2<br/>                 4. COLLECTOR, #2<br/>                 5. COLLECTOR, #3<br/>                 6. COLLECTOR, #3<br/>                 7. COLLECTOR, #4<br/>                 8. COLLECTOR, #4<br/>                 9. BASE, #4<br/>                 10. EMITTER, #4<br/>                 11. BASE, #3<br/>                 12. EMITTER, #3<br/>                 13. BASE, #2<br/>                 14. EMITTER, #2<br/>                 15. BASE, #1<br/>                 16. EMITTER, #1</p> |
| <p><b>STYLE 5:</b></p> <p>PIN 1. DRAIN, DYE #1<br/>                 2. DRAIN, #1<br/>                 3. DRAIN, #2<br/>                 4. DRAIN, #2<br/>                 5. DRAIN, #3<br/>                 6. DRAIN, #3<br/>                 7. DRAIN, #4<br/>                 8. DRAIN, #4<br/>                 9. GATE, #4<br/>                 10. SOURCE, #4<br/>                 11. GATE, #3<br/>                 12. SOURCE, #3<br/>                 13. GATE, #2<br/>                 14. SOURCE, #2<br/>                 15. GATE, #1<br/>                 16. SOURCE, #1</p> | <p><b>STYLE 6:</b></p> <p>PIN 1. CATHODE<br/>                 2. CATHODE<br/>                 3. CATHODE<br/>                 4. CATHODE<br/>                 5. CATHODE<br/>                 6. CATHODE<br/>                 7. CATHODE<br/>                 8. CATHODE<br/>                 9. ANODE<br/>                 10. ANODE<br/>                 11. ANODE<br/>                 12. ANODE<br/>                 13. ANODE<br/>                 14. ANODE<br/>                 15. ANODE<br/>                 16. ANODE</p>                                 | <p><b>STYLE 7:</b></p> <p>PIN 1. SOURCE N-CH<br/>                 2. COMMON DRAIN (OUTPUT)<br/>                 3. COMMON DRAIN (OUTPUT)<br/>                 4. GATE P-CH<br/>                 5. COMMON DRAIN (OUTPUT)<br/>                 6. COMMON DRAIN (OUTPUT)<br/>                 7. COMMON DRAIN (OUTPUT)<br/>                 8. SOURCE P-CH<br/>                 9. SOURCE P-CH<br/>                 10. COMMON DRAIN (OUTPUT)<br/>                 11. COMMON DRAIN (OUTPUT)<br/>                 12. COMMON DRAIN (OUTPUT)<br/>                 13. GATE N-CH<br/>                 14. COMMON DRAIN (OUTPUT)<br/>                 15. COMMON DRAIN (OUTPUT)<br/>                 16. SOURCE N-CH</p> |   |

|                         |                                     |   |
|-------------------------|-------------------------------------|---|
| <b>DOCUMENT NUMBER:</b> | <b>98ASB42566B</b>                  | Electronic versions are uncontrolled except when accessed directly from the Document Repository.<br>Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| <b>DESCRIPTION:</b>     | <b>SOIC-16 9.90X3.90X1.50 1.27P</b> | <b>PAGE 2 OF 2</b>  |

onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

# MECHANICAL CASE OUTLINE PACKAGE DIMENSIONS



TSSOP-16 WB  
CASE 948F  
ISSUE B

DATE 19 OCT 2006



NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DIMENSION A DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS. MOLD FLASH OR GATE BURRS SHALL NOT EXCEED 0.15 (0.006) PER SIDE.
4. DIMENSION B DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSION. INTERLEAD FLASH OR PROTRUSION SHALL NOT EXCEED 0.25 (0.010) PER SIDE.
5. DIMENSION K DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.08 (0.003) TOTAL IN EXCESS OF THE K DIMENSION AT MAXIMUM MATERIAL CONDITION.
6. TERMINAL NUMBERS ARE SHOWN FOR REFERENCE ONLY.
7. DIMENSION A AND B ARE TO BE DETERMINED AT DATUM PLANE -W-.

| DIM | MILLIMETERS |      | INCHES    |       |
|-----|-------------|------|-----------|-------|
|     | MIN         | MAX  | MIN       | MAX   |
| A   | 4.90        | 5.10 | 0.193     | 0.200 |
| B   | 4.30        | 4.50 | 0.169     | 0.177 |
| C   | ---         | 1.20 | ---       | 0.047 |
| D   | 0.05        | 0.15 | 0.002     | 0.006 |
| F   | 0.50        | 0.75 | 0.020     | 0.030 |
| G   | 0.65 BSC    |      | 0.026 BSC |       |
| H   | 0.18        | 0.28 | 0.007     | 0.011 |
| J   | 0.09        | 0.20 | 0.004     | 0.008 |
| J1  | 0.09        | 0.16 | 0.004     | 0.006 |
| K   | 0.19        | 0.30 | 0.007     | 0.012 |
| K1  | 0.19        | 0.25 | 0.007     | 0.010 |
| L   | 6.40 BSC    |      | 0.252 BSC |       |
| M   | 0°          | 8°   | 0°        | 8°    |

RECOMMENDED  
SOLDERING FOOTPRINT\*



GENERIC  
MARKING DIAGRAM\*



- XXXX = Specific Device Code
- A = Assembly Location
- L = Wafer Lot
- Y = Year
- W = Work Week
- G or ■ = Pb-Free Package

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "■", may or may not be present. Some products may not follow the Generic Marking.

\*For additional information on our Pb-Free strategy and soldering details, please download the onsemi Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

|                  |             |  |
|------------------|-------------|--|
| DOCUMENT NUMBER: | 98ASH70247A | Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| DESCRIPTION:     | TSSOP-16    | PAGE 1 OF 1  |

onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.



**onsemi**, **Onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## ADDITIONAL INFORMATION

### TECHNICAL PUBLICATIONS:

Technical Library: [www.onsemi.com/design/resources/technical-documentation](http://www.onsemi.com/design/resources/technical-documentation)  
onsemi Website: [www.onsemi.com](http://www.onsemi.com)

### ONLINE SUPPORT: [www.onsemi.com/support](http://www.onsemi.com/support)

For additional information, please contact your local Sales Representative at [www.onsemi.com/support/sales](http://www.onsemi.com/support/sales)

