

# MJE15034 (NPN), MJE15035 (PNP)

## Complementary Silicon Plastic Power Transistors

### TO-220, NPN & PNP Devices

Complementary silicon plastic power transistors are designed for use as high-frequency drivers in audio amplifiers.

#### Features

- High Current Gain – Bandwidth Product
- TO-220 Compact Package
- Epoxy meets UL 94 V-0 @ 0.125 in
- These Devices are Pb-Free and are RoHS Compliant\*

#### MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	$V_{CEO}$	350	Vdc
Collector-Base Voltage	$V_{CB}$	350	Vdc
Emitter-Base Voltage	$V_{EB}$	5.0	Vdc
Collector Current – Continuous	$I_C$	4.0	Adc
Collector Current – Peak	$I_{CM}$	8.0	Adc
Base Current	$I_B$	1.0	Adc
Total Power Dissipation @ $T_C = 25^\circ\text{C}$ Derate above $25^\circ\text{C}$	$P_D$	50 0.40	W W/ $^\circ\text{C}$
Total Power Dissipation @ $T_A = 25^\circ\text{C}$ Derate above $25^\circ\text{C}$	$P_D$	2.0 0.016	W W/ $^\circ\text{C}$
Operating and Storage Junction Temperature Range	$T_J, T_{stg}$	-65 to +150	$^\circ\text{C}$
ESD – Human Body Model	HBM	3B	V
ESD – Machine Model	MM	C	V

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

#### THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction-to-Case	$R_{\theta JC}$	2.5	$^\circ\text{C/W}$
Thermal Resistance, Junction-to-Ambient	$R_{\theta JA}$	62.5	$^\circ\text{C/W}$

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.




ON Semiconductor®


[www.onsemi.com](http://www.onsemi.com)

### 4.0 AMPERES POWER TRANSISTORS COMPLEMENTARY SILICON 350 VOLTS, 50 WATTS


#### COMPLEMENTARY

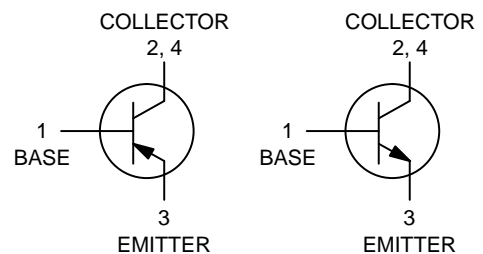

#### MARKING DIAGRAM

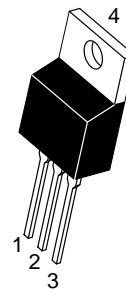

TO-220  
CASE 221A  
STYLE 1

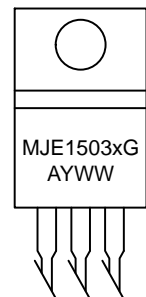

MJE1503x = Device Code  
x = 4 or 5  
A = Location Code  
Y = Year  
WW = Work Week  
G = Pb-Free Package

#### ORDERING INFORMATION

Device	Package	Shipping
MJE15034G	TO-220 (Pb-Free)	50 Units / Rail
MJE15035G	TO-220 (Pb-Free)	50 Units / Rail

# MJE15034 (NPN), MJE15035 (PNP)

## ELECTRICAL CHARACTERISTICS ( $T_C = 25^\circ\text{C}$ unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
----------------	--------	-----	-----	------

### OFF CHARACTERISTICS

Collector-Emitter Sustaining Voltage (Note 1)	( $I_C = 10\text{ mAdc}, I_B = 0$ )	$V_{CEO(sus)}$	350	-	Vdc
Collector Cutoff Current	( $V_{CB} = 350\text{ Vdc}, I_E = 0$ )	$I_{CBO}$	-	10	$\mu\text{Adc}$
Emitter Cutoff Current	( $V_{BE} = 5.0\text{ Vdc}, I_C = 0$ )	$I_{EBO}$	-	10	$\mu\text{Adc}$

### ON CHARACTERISTICS (Note 1)

DC Current Gain	( $I_C = 0.1\text{ Adc}, V_{CE} = 5.0\text{ Vdc}$ ) ( $I_C = 0.5\text{ Adc}, V_{CE} = 5.0\text{ Vdc}$ ) ( $I_C = 1.0\text{ Adc}, V_{CE} = 5.0\text{ Vdc}$ ) ( $I_C = 2.0\text{ Adc}, V_{CE} = 5.0\text{ Vdc}$ )	$h_{FE}$	100 100 50 10	- - - -	- - - -
Collector-Emitter Saturation Voltage	( $I_C = 1.0\text{ Adc}, I_B = 0.1\text{ Adc}$ )	$V_{CE(sat)}$	-	0.5	Vdc
Base-Emitter On Voltage	( $I_C = 1.0\text{ Adc}, V_{CE} = 5.0\text{ Vdc}$ )	$V_{BE(on)}$	-	1.0	Vdc

### DYNAMIC CHARACTERISTICS

Current Gain - Bandwidth Product (Note 2) ( $I_C = 500\text{ mAdc}, V_{CE} = 10\text{ Vdc}, f_{test} = 1.0\text{ MHz}$ )	$f_T$	30	-	MHz
---	-------	----	---	-----

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

1. Pulse Test: Pulse Width  $\leq 300\ \mu\text{s}$ , Duty Cycle  $\leq 2.0\%$ .
2.  $f_T = |h_{fe}| \cdot f_{test}$ .

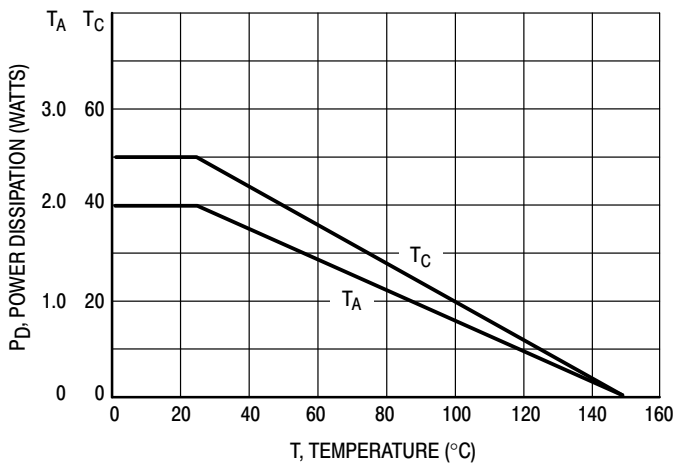


Figure 1. Power Derating

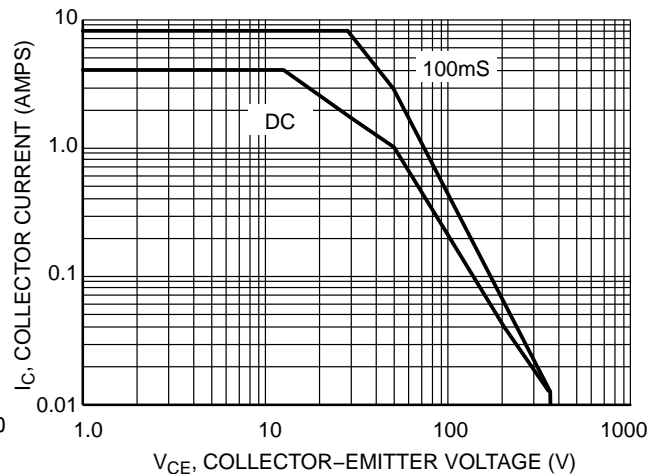


Figure 2. Active Region Safe Operating Area



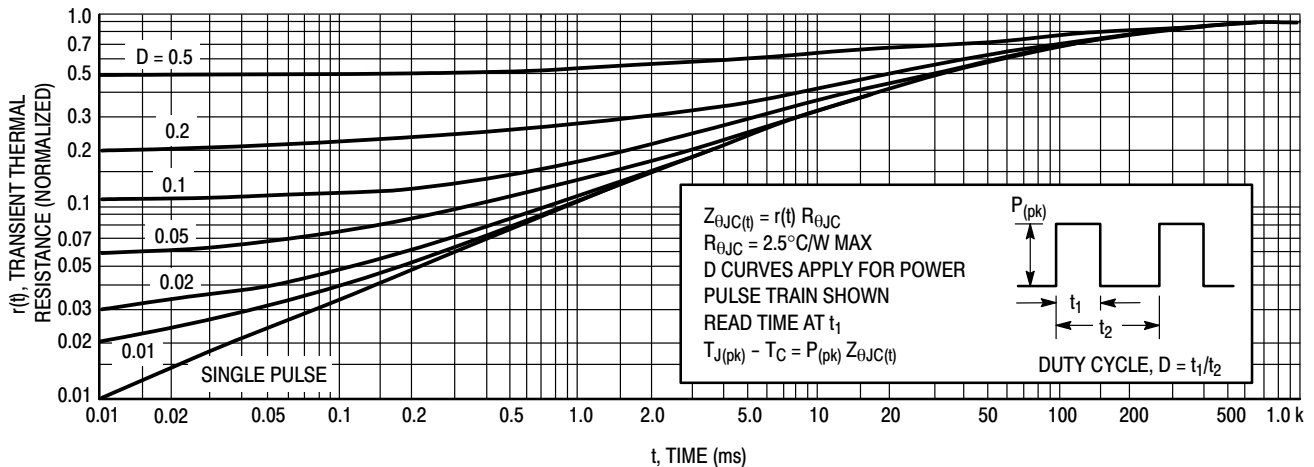


Figure 3. Thermal Response


# MJE15034 (NPN), MJE15035 (PNP)

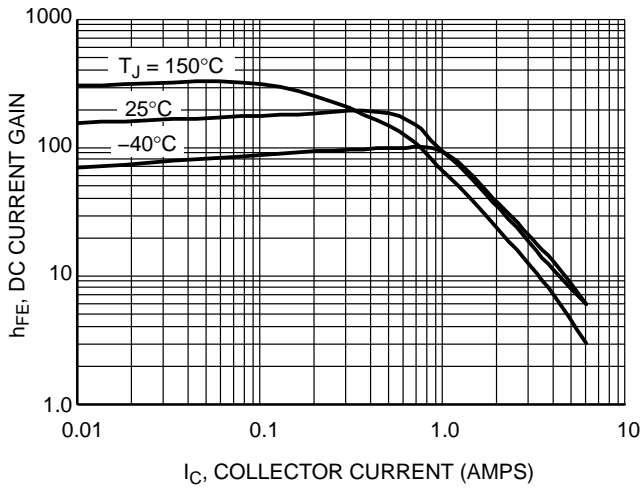


**Figure 4. DC Current Gain,  $V_{CE} = 5.0$  V  
NPN MJE15034**

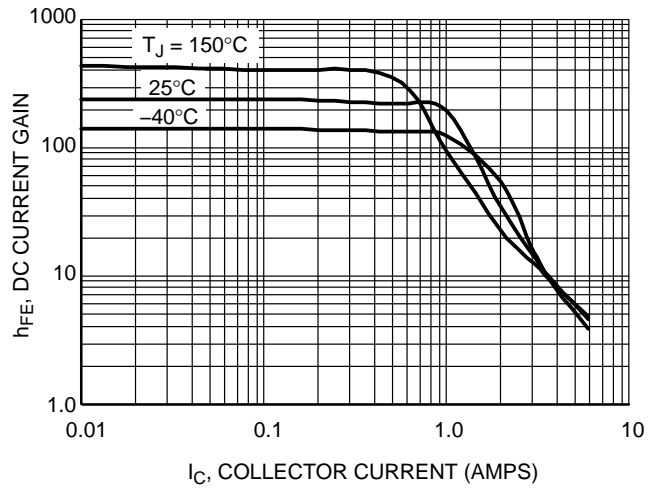


**Figure 5. DC Current Gain,  $V_{CE} = 5.0$  V  
PNP MJE15035**

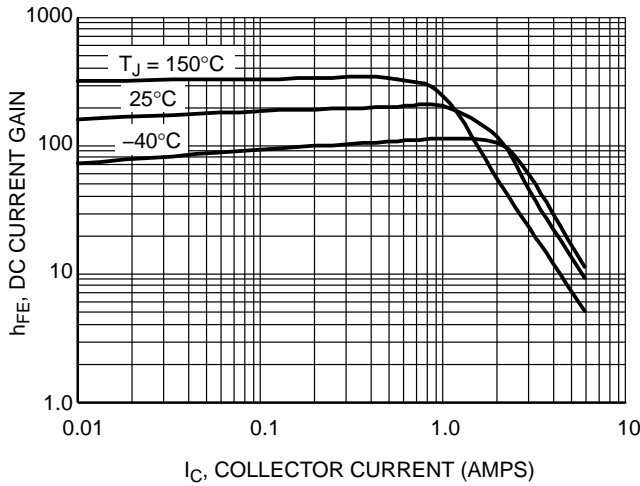


**Figure 6. DC Current Gain,  $V_{CE} = 20$  V  
NPN MJE15034**

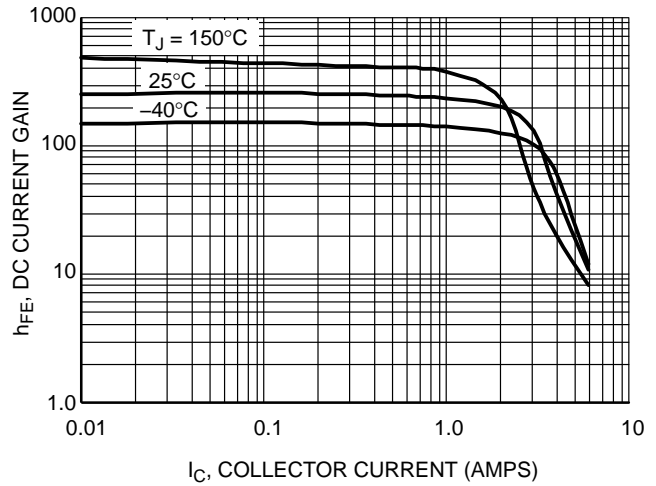

**Figure 7. DC Current Gain,  $V_{CE} = 20$  V  
PNP MJE15035**

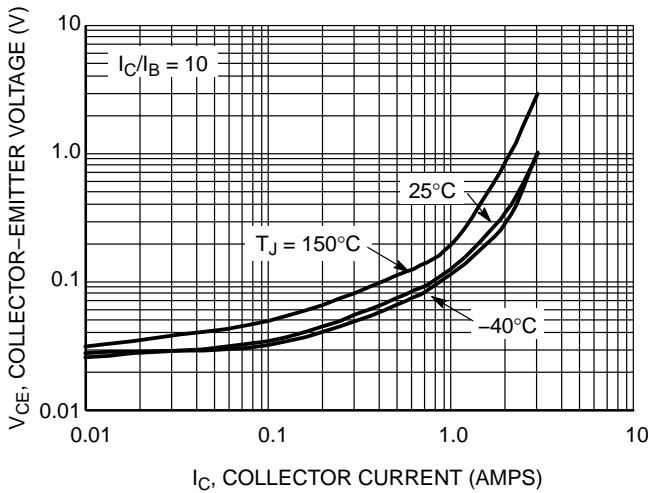


**Figure 8.  $V_{CE(sat)}$   
NPN MJE15034**

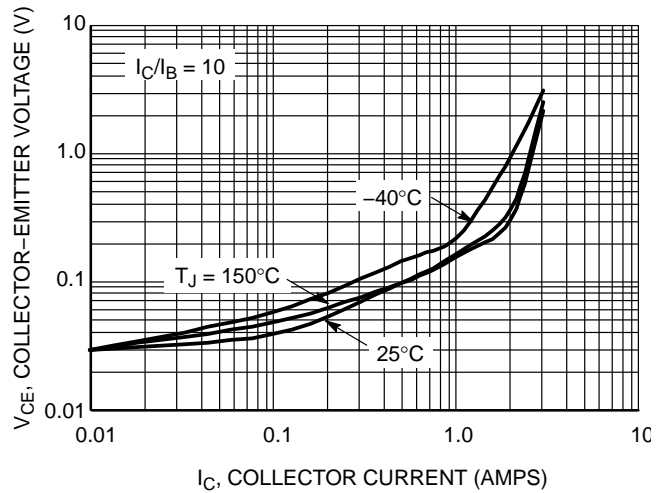


**Figure 9.  $V_{CE(sat)}$   
PNP MJE15035**


# MJE15034 (NPN), MJE15035 (PNP)

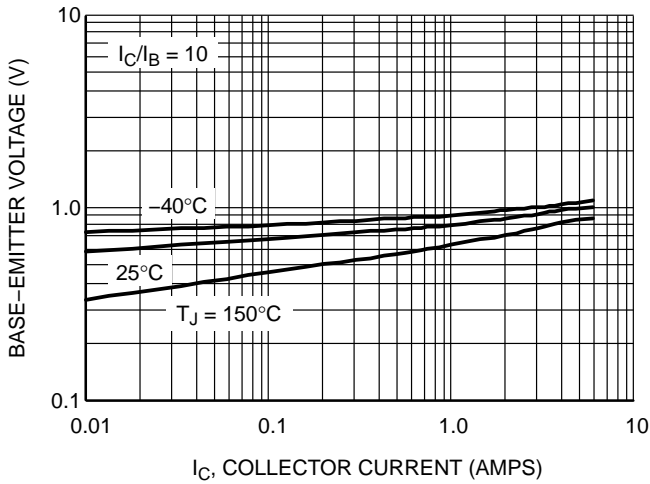


**Figure 10.  $V_{BE(sat)}$   
NPN MJE15034**

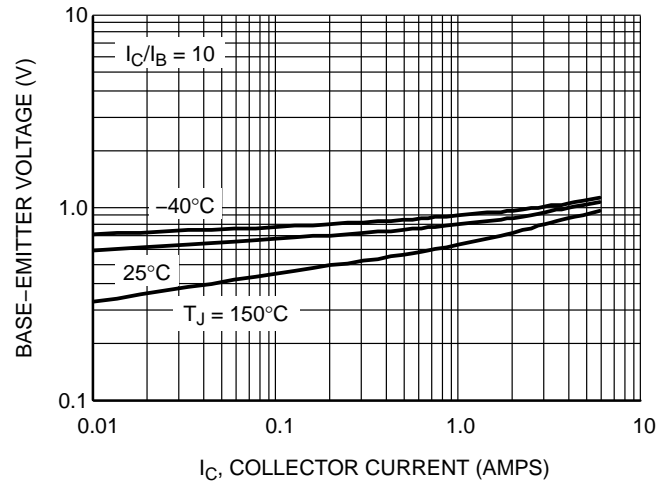


**Figure 11.  $V_{BE(sat)}$   
PNP MJE15035**

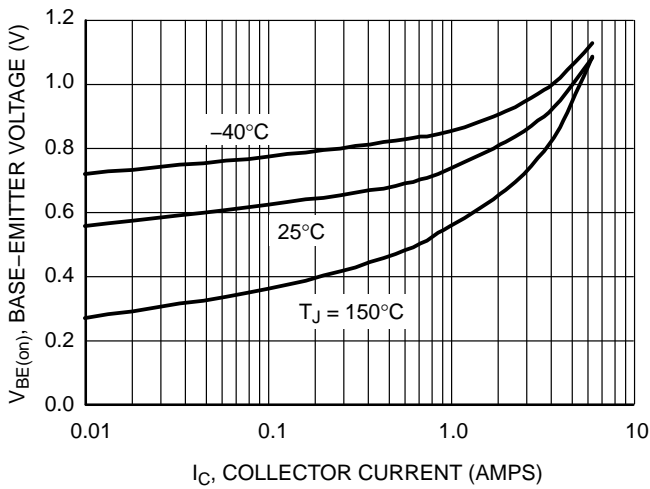


**Figure 12.  $V_{BE(on)}$   
NPN MJE15034**

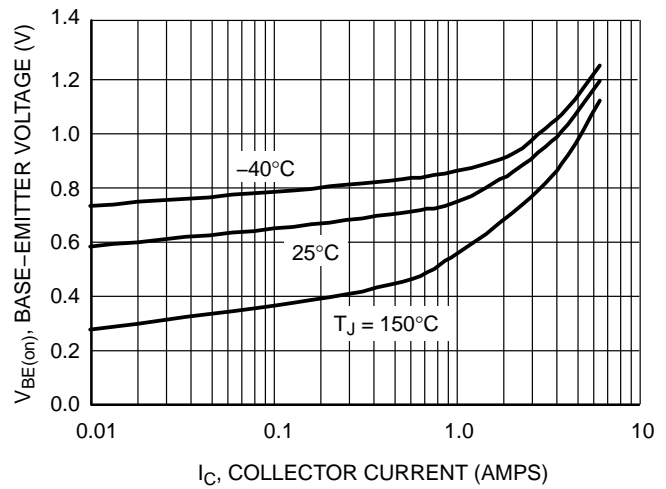

**Figure 13.  $V_{BE(on)}$   
PNP MJE15035**

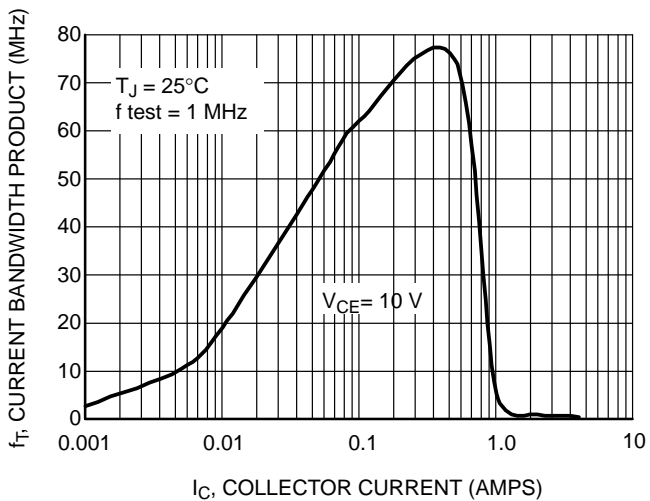

**Figure 14. Typical Current Gain Bandwidth Product  
NPN MJE15034**

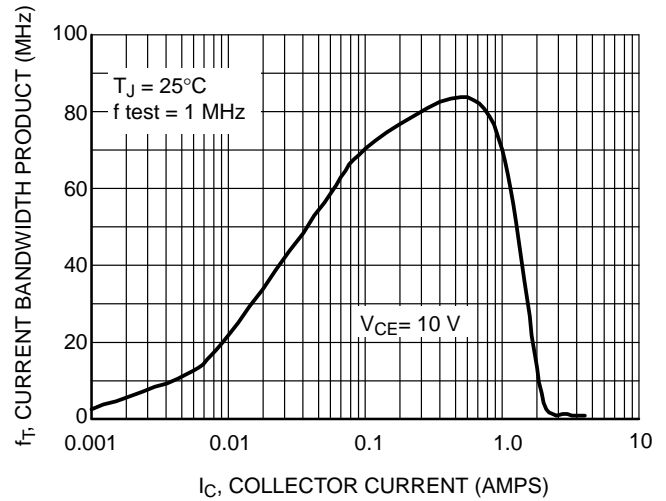

**Figure 15. Typical Current Gain Bandwidth Product  
PNP MJE15035**

**onsemi**, **Onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## ADDITIONAL INFORMATION

### TECHNICAL PUBLICATIONS:

Technical Library: [www.onsemi.com/design/resources/technical-documentation](http://www.onsemi.com/design/resources/technical-documentation)  
onsemi Website: [www.onsemi.com](http://www.onsemi.com)

### ONLINE SUPPORT: [www.onsemi.com/support](http://www.onsemi.com/support)

For additional information, please contact your local Sales Representative at [www.onsemi.com/support/sales](http://www.onsemi.com/support/sales)

