

# **General Purpose Transistors**

## **NPN Silicon**

# MMBT2222L, MMBT2222AL, SMMBT2222AL

#### **Features**

- These Devices are Pb–Free, Halogen Free/BFR Free and are RoHS Compliant
- S Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable

#### **MAXIMUM RATINGS**


Rating	Symbol	Value	Unit
Collector – Emitter Voltage  MMBT2222L  MMBT2222AL, SMMBT2222AL	V <sub>CEO</sub>	30 40	Vdc
Collector – Base Voltage  MMBT2222L  MMBT2222AL, SMMBT2222AL	V <sub>CBO</sub>	60 75	Vdc
Emitter-Base Voltage  MMBT2222L  MMBT2222AL, SMMBT2222AL	V <sub>EBO</sub>	5.0 6.0	Vdc
Collector Current – Continuous	Ic	600	mAdc
Collector Current – Peak (Note 3)	I <sub>CM</sub>	1100	mAdc

#### THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Total Device Dissipation FR-5 Board (Note 1) T <sub>A</sub> = 25°C Derate above 25°C	P <sub>D</sub>	225 1.8	mW mW/°C
Thermal Resistance, Junction-to-Ambient	$R_{\theta JA}$	556	°C/W
Total Device Dissipation Alumina Substrate (Note 2) T <sub>A</sub> = 25°C Derate above 25°C	P <sub>D</sub>	300 2.4	mW mW/°C
Thermal Resistance, Junction-to-Ambient	$R_{\theta JA}$	417	°C/W
Junction and Storage Temperature Range	T <sub>J</sub> , T <sub>stg</sub>	-55 to +150	°C

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

- 1. FR-5 =  $1.0 \times 0.75 \times 0.062$  in.
- 2. Alumina =  $0.4 \times 0.3 \times 0.024$  in. 99.5% alumina.
- 3. Reference SOA curve.





SOT-23 CASE 318 STYLE 6

#### **MARKING DIAGRAM**



xxx = 1P or M1B
M = Date Code\*
• = Pb-Free Package

(Note: Microdot may be in either location)

\*Date Code orientation and/or overbar may vary depending upon manufacturing location.

#### **ORDERING INFORMATION**

See detailed ordering and shipping information in the package dimensions section on page 6 of this data sheet.

# **ELECTRICAL CHARACTERISTICS** ( $T_A = 25$ °C unless otherwise noted)

Characteristic		Symbol	Min	Max	Unit	
OFF CHARACTERISTICS						
Collector – Emitter Breakdown Voltage (I <sub>C</sub> = 10 mAdo	c, $I_B = 0$ )	MMBT2222 MMBT2222A	V <sub>(BR)CEO</sub>	30 40	_ _	Vdc
Collector – Base Breakdown Voltage ( $I_C = 10 \mu Adc, I_I$	V <sub>(BR)CBO</sub>	60 75	- -	Vdc		
Emitter – Base Breakdown Voltage ( $I_E = 10 \mu Adc, I_C$	= 0)	MMBT2222 MMBT2222A	V <sub>(BR)EBO</sub>	5.0 6.0	- -	Vdc
Collector Cutoff Current (V <sub>CE</sub> = 60 Vdc, V <sub>EB(off)</sub> = 3.0 Vdc)	MMBT222	2A, SMMBT2222A	I <sub>CEX</sub>	-	10	nAdc
Collector Cutoff Current ( $V_{CB} = 50 \text{ Vdc}$ , $I_{E} = 0$ ) ( $V_{CB} = 60 \text{ Vdc}$ , $I_{E} = 0$ ) ( $V_{CB} = 50 \text{ Vdc}$ , $I_{E} = 0$ , $T_{A} = 125^{\circ}\text{C}$ ) ( $V_{CB} = 60 \text{ Vdc}$ , $I_{E} = 0$ , $T_{A} = 125^{\circ}\text{C}$ )		MMBT2222 2A, SMMBT2222A MMBT2222 2A, SMMBT2222A	І <sub>СВО</sub>	- - - -	0.01 0.01 10 10	μAdc
Emitter Cutoff Current (V <sub>EB</sub> = 3.0 Vdc, I <sub>C</sub> = 0)	MMBT222	2A, SMMBT2222A	I <sub>EBO</sub>	-	100	nAdc
Base Cutoff Current (V <sub>CE</sub> = 60 Vdc, V <sub>EB(off)</sub> = 3.0 Vd	lc) MMBT222	2A, SMMBT2222A	I <sub>BL</sub>	-	20	nAdc
ON CHARACTERISTICS				•		
DC Current Gain $ \begin{array}{l} \text{(I}_C = 0.1 \text{ mAdc, } V_{CE} = 10 \text{ Vdc)} \\ \text{(I}_C = 1.0 \text{ mAdc, } V_{CE} = 10 \text{ Vdc)} \\ \text{(I}_C = 10 \text{ mAdc, } V_{CE} = 10 \text{ Vdc)} \\ \text{(I}_C = 10 \text{ mAdc, } V_{CE} = 10 \text{ Vdc)} \\ \text{(I}_C = 10 \text{ mAdc, } V_{CE} = 10 \text{ Vdc, } T_A = -55^{\circ}\text{C)} \\ \text{(I}_C = 150 \text{ mAdc, } V_{CE} = 10 \text{ Vdc)} \text{ (Note 4)} \\ \text{(I}_C = 150 \text{ mAdc, } V_{CE} = 1.0 \text{ Vdc)} \text{ (Note 4)} \\ \text{(I}_C = 500 \text{ mAdc, } V_{CE} = 10 \text{ Vdc)} \text{ (Note 4)} \\ \end{array} $	MMBT2222	MMBT2222A only MMBT2222 2A, SMMBT2222A	h <sub>FE</sub>	35 50 75 35 100 50 30 40	- - - 300 - -	-
Collector – Emitter Saturation Voltage (Note 4) (I <sub>C</sub> = 150 mAdc, I <sub>B</sub> = 15 mAdc)	MMBT222	MMBT2222 2A, SMMBT2222A	V <sub>CE(sat)</sub>	- -	0.4 0.3	Vdc
$(I_C = 500 \text{ mAdc}, I_B = 50 \text{ mAdc})$	MMBT222	MMBT2222 2A, SMMBT2222A		- -	1.6 1.0	
Base – Emitter Saturation Voltage (Note 4) (I <sub>C</sub> = 150 mAdc, I <sub>B</sub> = 15 mAdc)	MMBT222	MMBT2222 2A, SMMBT2222A	V <sub>BE(sat)</sub>	_ 0.6	1.3 1.2	Vdc
$(I_C = 500 \text{ mAdc}, I_B = 50 \text{ mAdc})$	MMBT222	MMBT2222 2A, SMMBT2222A		- -	2.6 2.0	
SMALL-SIGNAL CHARACTERISTICS				•	•	
Current-Gain - Bandwidth Product (Note 5) (I <sub>C</sub> = 20 mAdc, V <sub>CE</sub> = 20 Vdc, f = 100 MHz)	MMBT222	MMBT2222 2A, SMMBT2222A	f <sub>T</sub>	250 300	_ _	MHz
Output Capacitance (V <sub>CB</sub> = 10 Vdc, I <sub>E</sub> = 0, f = 1.0 MHz)			C <sub>obo</sub>	-	8.0	pF
Input Capacitance ( $V_{EB} = 0.5 \text{ Vdc}$ , $I_{C} = 0$ , $f = 1.0 \text{ MHz}$ )	MMBT222	MMBT2222 2A, SMMBT2222A	C <sub>ibo</sub>	- -	30 25	pF
Input Impedance (I <sub>C</sub> = 1.0 mAdc, $V_{CE}$ = 10 Vdc, f = 1.0 kHz) (I <sub>C</sub> = 10 mAdc, $V_{CE}$ = 10 Vdc, f = 1.0 kHz)		2A, SMMBT2222A 2A, SMMBT2222A	h <sub>ie</sub>	2.0 0.25	8.0 1.25	kΩ
Voltage Feedback Ratio ( $I_C = 1.0 \text{ mAdc}$ , $V_{CE} = 10 \text{ Vdc}$ , $f = 1.0 \text{ kHz}$ ) ( $I_C = 10 \text{ mAdc}$ , $V_{CE} = 10 \text{ Vdc}$ , $f = 1.0 \text{ kHz}$ )		2A, SMMBT2222A 2A, SMMBT2222A	h <sub>re</sub>	- -	8.0 4.0	X 10 <sup>-4</sup>
Small – Signal Current Gain ( $I_C = 1.0$ mAdc, $V_{CE} = 10$ Vdc, $f = 1.0$ kHz) ( $I_C = 10$ mAdc, $V_{CE} = 10$ Vdc, $f = 1.0$ kHz)		2A, SMMBT2222A 2A, SMMBT2222A	h <sub>fe</sub>	50 75	300 375	-

#### **ELECTRICAL CHARACTERISTICS** (T<sub>A</sub> = 25°C unless otherwise noted)

Charact	Symbol	Min	Max	Unit	
SMALL-SIGNAL CHARACTERISTICS			•		
Output Admittance ( $I_C = 1.0 \text{ mAdc}$ , $V_{CE} = 10 \text{ Vdc}$ , $f = 1.0 \text{ kH}$ ( $I_C = 10 \text{ mAdc}$ , $V_{CE} = 10 \text{ Vdc}$ , $f = 1.0 \text{ kHz}$		h <sub>oe</sub>	5.0 25	35 200	μmhos
Collector Base Time Constant (I <sub>E</sub> = 20 mAdc, V <sub>CB</sub> = 20 Vdc, f = 31.8 MHz) MMBT2222A, SMMBT2222A			-	150	ps
Noise Figure (I <sub>C</sub> = 100 $\mu$ Adc, V <sub>CE</sub> = 10 Vdc, R <sub>S</sub> = 1.0 k $\Omega$ , f = 1.0 kHz) MMBT2222A, SMMBT2222A			-	4.0	dB
SWITCHING CHARACTERISTICS (MMBT2	222A only)		•		•
Delay Time	$(V_{CC} = 30 \text{ Vdc}, V_{BE(off)} = -0.5 \text{ Vdc},$	t <sub>d</sub>	_	10	
Rise Time	$(V_{CC} = 30 \text{ Vdc}, V_{BE(off)} = -0.5 \text{ Vdc}, \\ I_{C} = 150 \text{ mAdc}, I_{B1} = 15 \text{ mAdc})$	t <sub>r</sub>	_	25	ns
Storage Time	age Time (V <sub>CC</sub> = 30 Vdc, I <sub>C</sub> = 150 mAdc,		-	225	
Fall Time	$I_{B1} = I_{B2} = 15 \text{ mAdc}$	t <sub>f</sub>	_	60	ns

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

- 4. Pulse Test: Pulse Width  $\leq$  300  $\mu$ s, Duty Cycle  $\leq$  2.0%.
- 5. f<sub>T</sub> is defined as the frequency at which |h<sub>fe</sub>| extrapolates to unity.

#### **SWITCHING TIME EQUIVALENT TEST CIRCUITS**

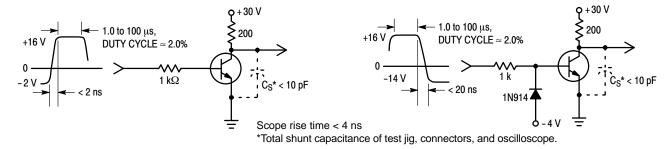


Figure 1. Turn-On Time

Figure 2. Turn-Off Time

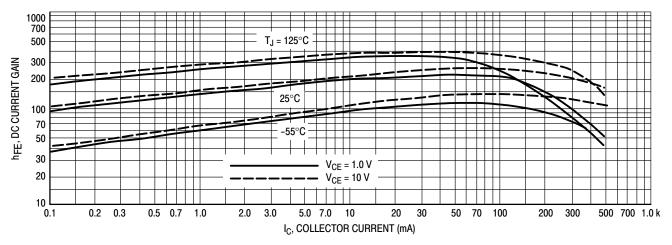


Figure 3. DC Current Gain

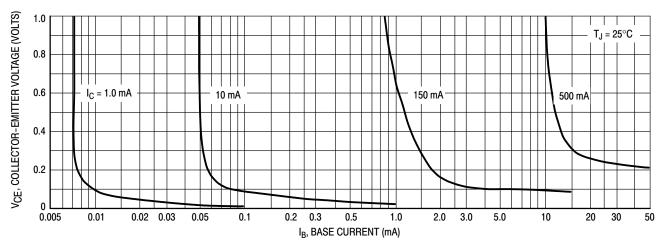


Figure 4. Collector Saturation Region




Figure 5. Turn-On Time




Figure 6. Turn-Off Time




Figure 7. Frequency Effects





Figure 8. Source Resistance Effects


1.3



f<sub>T</sub>, CURRENT-GAIN BANDWIDTH PRODUCT (MHz) 500 V<sub>CE</sub> = 20 V  $T_J = 25^{\circ}C$ 300 200 100 70 50 70 100 1.0 2.0 3.0 5.0 7.0 20 50 IC, COLLECTOR CURRENT (mA)

Figure 9. Capacitances


Figure 10. Current-Gain Bandwidth Product



1.2  $I_C/I_B = 10$ V<sub>BE(sat)</sub>, BASE-EMITTER SATURATION VOLTAGE (V) 1.1 1.0 0.9 -55°C 0.8 25°C 0.7 0.6 150°C 0.5 0.4 0.3 0.2 0.001 0.01 0.1 I<sub>C</sub>, COLLECTOR CURRENT (A)

Figure 11. Collector Emitter Saturation Voltage vs. Collector Current

Figure 12. Base Emitter Saturation Voltage vs.
Collector Current






Figure 13. Base Emitter Voltage vs. Collector Current

**Figure 14. Temperature Coefficients** 




Figure 15. Safe Operating Area

#### **ORDERING INFORMATION**

Device	Specific Marking Code	Package	Shipping <sup>†</sup>
MMBT2222LT1G	M1B	SOT-23 (Pb-Free)	3000 / Tape & Reel
MMBT2222ALT1G, SMMBT2222ALT1G	1P	SOT-23 (Pb-Free)	3000 / Tape & Reel
MMBT2222LT3G	M1B	SOT-23 (Pb-Free)	10,000 / Tape & Reel
MMBT2222ALT3G, SMMBT2222ALT3G	1P	SOT-23 (Pb-Free)	10,000 / Tape & Reel

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

<sup>\*</sup>S Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable.





**SOT-23 (TO-236)** CASE 318 ISSUE AT

**DATE 01 MAR 2023** 









#### NOTES:

- DIMENSIONING AND TOLERANCING PER ASME Y14.5M,1994.
- 2. CONTROLLING DIMENSION: MILLIMETERS
- 3. MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF THE BASE MATERIAL.
- 4. DIMENSIONS D AND E DO NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR GATE BURRS.

	MILLIMETERS				INCHES		
DIM	MIN.	N□M.	MAX.	MIN.	N□M.	MAX.	
Α	0.89	1.00	1.11	0.035	0.039	0.044	
A1	0.01	0.06	0.10	0.000	0.002	0.004	
b	0.37	0.44	0.50	0.015	0.017	0.020	
С	0.08	0.14	0.20	0.003	0.006	0.008	
D	2.80	2.90	3.04	0.110	0.114	0.120	
Ε	1.20	1.30	1.40	0.047	0.051	0.055	
e	1.78	1.90	2.04	0.070	0.075	0.080	
L	0.30	0.43	0.55	0.012	0.017	0.022	
L1	0.35	0.54	0.69	0.014	0.021	0.027	
HE	2.10	2.40	2.64	0.083	0.094	0.104	
Т	0*		10°	0*		10°	

# GENERIC MARKING DIAGRAM\*



XXX = Specific Device Code

M = Date Code

■ = Pb-Free Package



RECOMMENDED MOUNTING FOOTPRINT

For additional information on our Pb-Free strategy and soldering details, please download the DN Semiconductor Soldering and Mounting Techniques Reference Manual, SDLDERRM/D.

#### **STYLES ON PAGE 2**

DOCUMENT NUMBER:	98ASB42226B	Electronic versions are uncontrolled except when accessed directly from the Document Repos Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.	
DESCRIPTION:	SOT-23 (TO-236)		PAGE 1 OF 2

onsemi and ONSEMI are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

<sup>\*</sup>This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "•", may or may not be present. Some products may not follow the Generic Marking.

# MECHANICAL CASE OUTLINE PACKAGE DIMENSIONS



#### **SOT-23 (TO-236)** CASE 318 ISSUE AT

**DATE 01 MAR 2023** 

STYLE 1 THRU 5: CANCELLED	STYLE 6: PIN 1. BASE 2. EMITTER 3. COLLECTOR	STYLE 7: PIN 1. EMITTER 2. BASE 3. COLLECTOR	STYLE 8: PIN 1. ANODE 2. NO CONNECTION 3. CATHODE	1	
STYLE 9:	STYLE 10:	STYLE 11:	STYLE 12: PIN 1. CATHODE 2. CATHODE 3. ANODE	STYLE 13:	STYLE 14:
PIN 1. ANODE	PIN 1. DRAIN	PIN 1. ANODE		PIN 1. SOURCE	PIN 1. CATHODE
2. ANODE	2. SOURCE	2. CATHODE		2. DRAIN	2. GATE
3. CATHODE	3. GATE	3. CATHODE-ANODE		3. GATE	3. ANODE
STYLE 15:	STYLE 16:	STYLE 17:	STYLE 18:	STYLE 19:	STYLE 20:
PIN 1. GATE	PIN 1. ANODE	PIN 1. NO CONNECTION	PIN 1. NO CONNECTION	I PIN 1. CATHODE	PIN 1. CATHODE
2. CATHODE	2. CATHODE	2. ANODE	2. CATHODE	2. ANODE	2. ANODE
3. ANODE	3. CATHODE	3. CATHODE	3. ANODE	3. CATHODE-ANODE	3. GATE
STYLE 21:	STYLE 22:	STYLE 23:	STYLE 24:	STYLE 25:	STYLE 26:
PIN 1. GATE	PIN 1. RETURN	PIN 1. ANODE	PIN 1. GATE	PIN 1. ANODE	PIN 1. CATHODE
2. SOURCE	2. OUTPUT	2. ANODE	2. DRAIN	2. CATHODE	2. ANODE
3. DRAIN	3. INPUT	3. CATHODE	3. SOURCE	3. GATE	3. NO CONNECTION
STYLE 27: PIN 1. CATHODE 2. CATHODE 3. CATHODE	STYLE 28: PIN 1. ANODE 2. ANODE 3. ANODE				

DOCUMENT NUMBER:	98ASB42226B	Electronic versions are uncontrolled except when accessed directly from the Document Reposito Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.	
DESCRIPTION:	SOT-23 (TO-236)		PAGE 2 OF 2

onsemi and ONSEMi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

onsemi, ONSEMI., and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at <a href="www.onsemi.com/site/pdf/Patent-Marking.pdf">www.onsemi.com/site/pdf/Patent-Marking.pdf</a>. onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems. or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

#### ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:

 $\textbf{Technical Library:} \ \underline{www.onsemi.com/design/resources/technical-documentation}$ 

onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at

www.onsemi.com/support/sales