


NCV8508

5.0 V, 250 mA LDO with Watchdog and RESET

The NCV8508 is a precision micropower Low Dropout (LDO) voltage regulator. The part contains many of the required features for powering microprocessors. Its robustness makes it suitable for severe automotive environments. In addition, the NCV8508 is ideal for use in battery operated, microprocessor controlled equipment because of its extremely low quiescent current.

Features

- Output Voltage: 5.0 V
- $\pm 3.0\%$ Output Voltage
- I_{OUT} Up to 250 mA
- Quiescent Current Independent of Load
- Micropower Compatible Control Functions:
 - ◆ Wakeup
 - ◆ Watchdog
 - ◆ RESET
- Low Quiescent Current (100 μ A typ)
- Protection Features:
 - ◆ Thermal Shutdown
 - ◆ Short Circuit
 - ◆ 45 V Operation
- Internally Fused Leads in SO-16L Package
- NCV Prefix for Automotive and Other Applications Requiring Site and Change Control
- AEC Qualified
- PPAP Capable
- This is a Pb-Free Device*

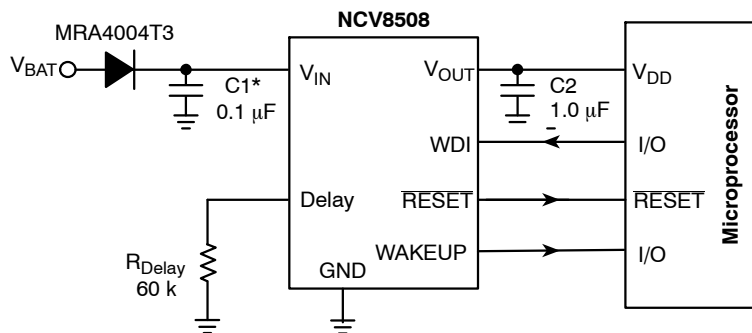

*C1 required if regulator is located far from power supply filter.

Figure 1. Application Circuit




*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.



ON Semiconductor®

<http://onsemi.com>

MARKING DIAGRAMS




A = Assembly Location
 WL = Wafer Lot
 YY, Y = Year
 WW = Work Week
 G or ■ = Pb-Free Package

ORDERING INFORMATION


See detailed ordering and shipping information in the package dimensions section on page 23 of this data sheet.

NCV8508

PIN CONNECTIONS




SO-16L



D²PAK-7

Tab = GND
Lead

1. V_{OUT}
2. V_{IN}
3. WDI
4. GND
5. Wakeup
6. RESET
7. Delay

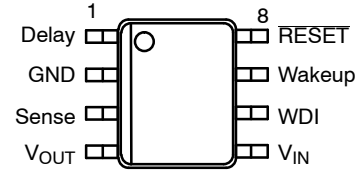

SO-8 EP

PACKAGE PIN DESCRIPTION

| PACKAGE PIN # | | | PIN SYMBOL | FUNCTION |
|----------------------|--------------|---------|------------------|--|
| D ² PAK-7 | SO-16L | SO-8 EP | | |
| 1 | 8 | 4 | V _{OUT} | Regulated output voltage ± 3.0%. |
| 2 | 9 | 5 | V _{IN} | Supply Voltage to the IC. |
| 3 | 11 | 6 | WDI | CMOS compatible input lead. The Watchdog function monitors the falling edge of the incoming signal. |
| 4 | 4, 5, 12, 13 | 2 | GND | Ground connection. |
| 5 | 14 | 7 | Wakeup | CMOS compatible output consisting of a continuously generated signal used to "wake up" the microprocessor from sleep mode. |
| 6 | 15 | 8 | RESET | CMOS compatible output lead RESET goes low whenever V _{OUT} drops by more than 7.0% from nominal, or during the absence of a correct Watchdog signal. |
| 7 | 16 | 1 | Delay | Buffered bandgap voltage used to create timing current for RESET and Wakeup from R _{Delay} . |
| - | 1-3, 6, 10 | - | NC | No Connection. |
| - | 7 | 3 | Sense | Kelvin connection which allows remote sensing of the output voltage for improved regulation. Connect to V _{OUT} if remote sensing is not required. |
| - | - | EPAD | EPAD | Connect to Ground potential or leave unconnected. |

NCV8508

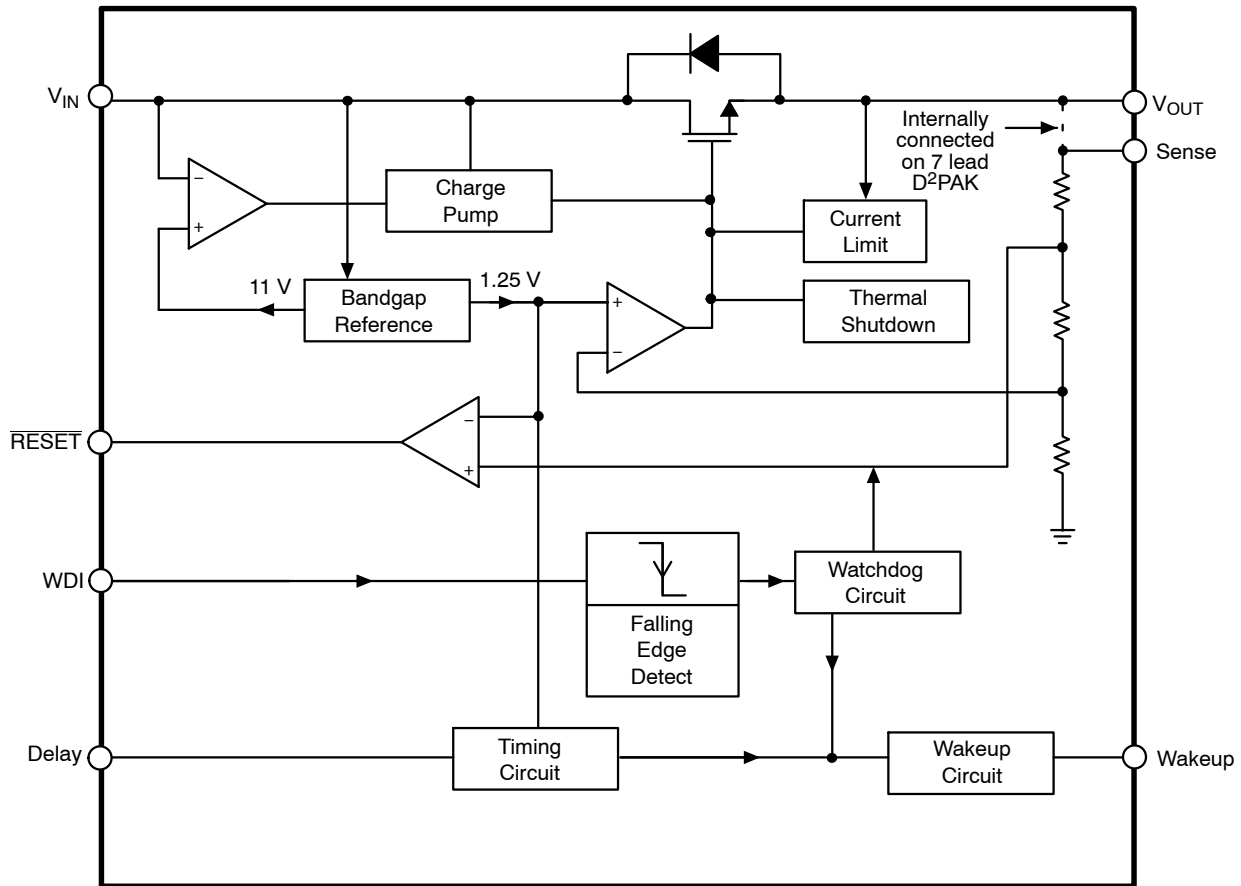


Figure 2. Block Diagram

MAXIMUM RATINGS

| Rating | Value | Unit |
|---|--------------------|--------|
| Input Voltage, V_{IN} (DC) | -0.3 to 45 | V |
| Peak Transient Voltage (46 V Load Dump @ $V_{IN} = 14$ V) | 60 | V |
| Output Voltage, V_{OUT} | -0.3 to 18 | V |
| ESD Susceptibility: | | |
| | Human Body Model | 2.0 kV |
| | Machine Model | 150 V |
| Logic Inputs/Outputs (RESET, WDI, Wakeup) | -0.3 to +7.0 | V |
| Operating Junction Temperature, T_J | -40 to 150 | °C |
| Storage Temperature Range, T_S | -55 to +150 | °C |
| Peak Reflow Soldering Temperature: | Reflow: (Note 1) | °C |
| | 240 Peak | |
| | 260 Peak (Pb-Free) | |
| | (Note 3) | |

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

- 60 second maximum above 183°C.
- Depending on thermal properties of substrate $R_{\theta JA} = R_{\theta JC} + R_{\theta JCA}$.
- 5°C/+0°C allowable conditions, applies to both Pb and Pb-Free devices.

THERMAL CHARACTERISTICS

See Package Thermal Data Section (Page 10)

NCV8508

ELECTRICAL CHARACTERISTICS ($-40^{\circ}\text{C} \leq T_J \leq 125^{\circ}\text{C}$; $6.0\text{ V} \leq V_{\text{IN}} \leq 28\text{ V}$, $100\ \mu\text{A} \leq I_{\text{OUT}} \leq 150\text{ mA}$, $C_2 = 1.0\ \mu\text{F}$, $R_{\text{Delay}} = 60\text{ k}$; unless otherwise specified.)

| Characteristic | Test Conditions | Min | Typ | Max | Unit |
|--|---|------|------|------|--------------------|
| OUTPUT | | | | | |
| Output Voltage | – | 4.85 | 5.00 | 5.15 | V |
| Dropout Voltage ($V_{\text{IN}} - V_{\text{OUT}}$) | $I_{\text{OUT}} = 150\text{ mA}$. Note 4 | – | 450 | 900 | mV |
| Load Regulation | $V_{\text{IN}} = 14\text{ V}$, $100\ \mu\text{A} \leq I_{\text{OUT}} \leq 150\text{ mA}$ | – | 5.0 | 30 | mV |
| Line Regulation | $6.0\text{ V} \leq V_{\text{IN}} \leq 28\text{ V}$, $I_{\text{OUT}} = 5.0\text{ mA}$ | – | 5.0 | 50 | mV |
| Current Limit | – | 250 | 400 | – | mA |
| Thermal Shutdown | Guaranteed by Design | 150 | 180 | 210 | $^{\circ}\text{C}$ |
| Quiescent Current | $V_{\text{IN}} = 12\text{ V}$, $I_{\text{OUT}} = 150\text{ mA}$, (see Figure 6) | – | 100 | 150 | μA |

RESET

| | | | | | |
|-------------|---|--|---|------------|----------|
| Threshold | – | 4.50 | 4.65 | 4.80 | V |
| Output Low | $R_{\text{LOAD}} = 10\text{ k to } V_{\text{OUT}}$, $V_{\text{OUT}} \geq 1.0\text{ V}$ $R_{\text{LOAD}} = 5.1\text{ k to } V_{\text{OUT}}$, $V_{\text{OUT}} \geq 1.0\text{ V}$ | – | 0.2 0.4 | 0.4 0.8 | V |
| Output High | $R_{\text{LOAD}} = 10\text{ k to GND}$ $R_{\text{LOAD}} = 5.1\text{ k to GND}$ | $V_{\text{OUT}} - 0.5$ $V_{\text{OUT}} - 1.0$ | $V_{\text{OUT}} - 0.25$ $V_{\text{OUT}} - 0.5$ | – | V |
| Delay Time | $V_{\text{IN}} = 14\text{ V}$, $R_{\text{Delay}} = 60\text{ k}$, $I_{\text{OUT}} = 5.0\text{ mA}$ $V_{\text{IN}} = 14\text{ V}$, $R_{\text{Delay}} = 120\text{ k}$, $I_{\text{OUT}} = 5.0\text{ mA}$ | 2.0 – | 3.0 6.0 | 4.0 – | ms ms |

WATCHDOG INPUT

| | | | | | |
|----------------|--|-----|-----|-----|--------------------|
| Threshold High | – | 70 | – | – | $\%V_{\text{OUT}}$ |
| Threshold Low | – | – | – | 30 | $\%V_{\text{OUT}}$ |
| Hysteresis | – | – | 100 | – | mV |
| Input Current | $\text{WDI} = 6.0\text{ V}$ | – | 0.1 | +10 | μA |
| Pulse Width | 50% WDI falling edge to 50% WDI rising edge and 50% WDI rising edge to 50% WDI falling edge, (see Figure 5) | 5.0 | – | – | μs |

WAKEUP OUTPUT ($V_{\text{IN}} = 14\text{ V}$, $I_{\text{OUT}} = 5.0\text{ mA}$)

| | | | | | |
|---|---|--|---|------------|---------------|
| Wakeup Period | See Figures 4 and 5, $R_{\text{DELAY}} = 60\text{ k}$ See Figures 4 and 5, $R_{\text{DELAY}} = 120\text{ k}$ | 18 – | 25 50 | 32 – | ms ms |
| Wakeup Duty Cycle Nominal | See Figure 3 | 45 | 50 | 55 | % |
| RESET HIGH to Wakeup Rising Delay Time | $R_{\text{DELAY}} = 60\text{ k}$ 50% RESET rising edge to 50% Wakeup edge, $R_{\text{DELAY}} = 120\text{ k}$ (see Figures 3 and 4) | 9.0 – | 12.5 25 | 16 – | ms ms |
| Wakeup Response to Watchdog Input | 50% WDI falling edge to 50% Wakeup falling edge | – | 0.1 | 5.0 | μs |
| Wakeup Response to RESET | 50% RESET falling edge to 50% Wakeup falling edge. $V_{\text{OUT}} = 5.0\text{ V} \rightarrow 4.5\text{ V}$ | – | 0.1 | 5.0 | μs |
| Output Low | $R_{\text{LOAD}} = 10\text{ k to } V_{\text{OUT}}$, $V_{\text{OUT}} \geq 1.0\text{ V}$ $R_{\text{LOAD}} = 5.1\text{ k to } V_{\text{OUT}}$, $V_{\text{OUT}} \geq 1.0\text{ V}$ | – | 0.2 0.4 | 0.4 0.8 | V |
| Output High | $R_{\text{LOAD}} = 10\text{ k to GND}$ $R_{\text{LOAD}} = 5.1\text{ k to GND}$ | $V_{\text{OUT}} - 0.5$ $V_{\text{OUT}} - 1.0$ | $V_{\text{OUT}} - 0.25$ $V_{\text{OUT}} - 0.5$ | – | V |

DELAY

| | | | | | |
|----------------|---|---|------|---|---|
| Output Voltage | $I_{\text{DELAY}} = 50\ \mu\text{A}$. Note 5 | – | 1.25 | – | V |
|----------------|---|---|------|---|---|

4. Measured when the output voltage has dropped 100 mV from the nominal value. (see Figure 12)

5. Current drain on the Delay pin directly affects the Delay Time, Wakeup Period, and the RESET to Wakeup Delay Time.

TIMING DIAGRAMS

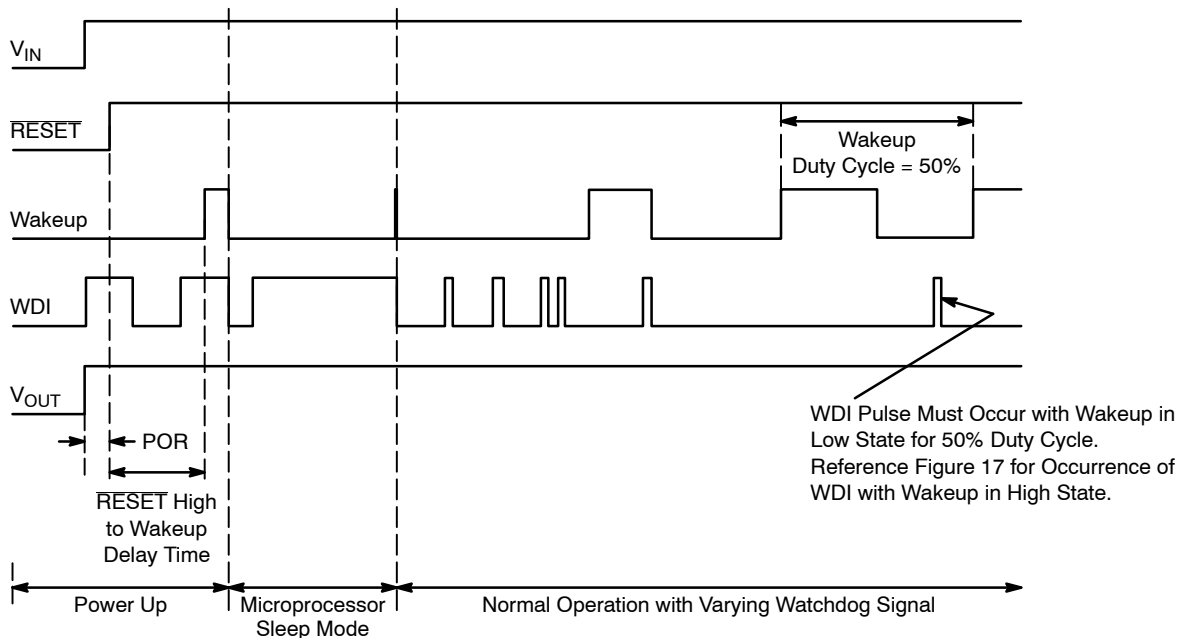


Figure 3. Power Up, Sleep Mode and Normal Operation

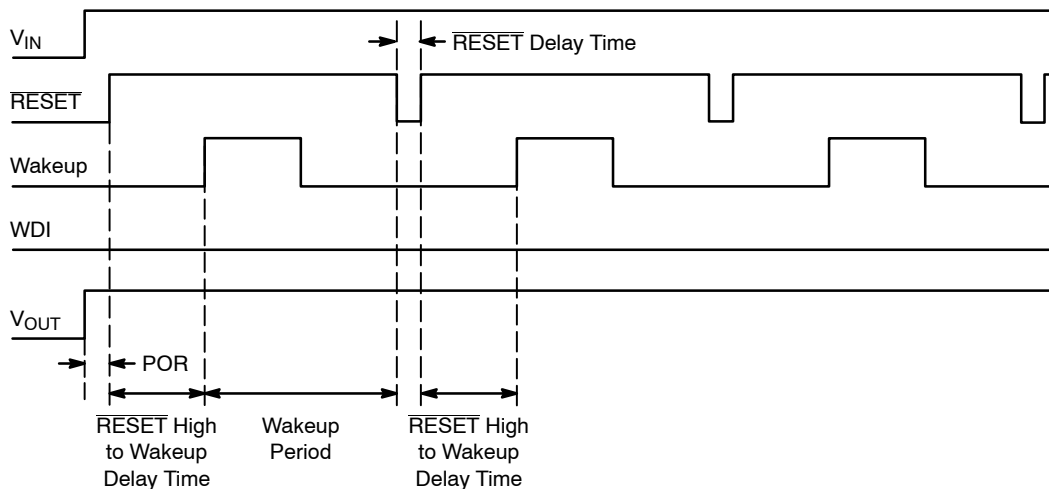


Figure 4. Error Condition: Watchdog Remains Low and a \overline{RESET} Is Issued

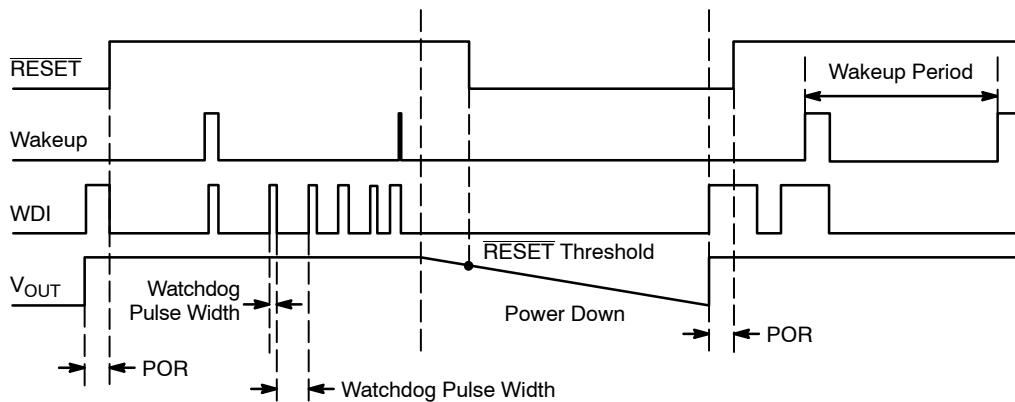


Figure 5. Power Down and Restart Sequence

TYPICAL PERFORMANCE CHARACTERISTICS

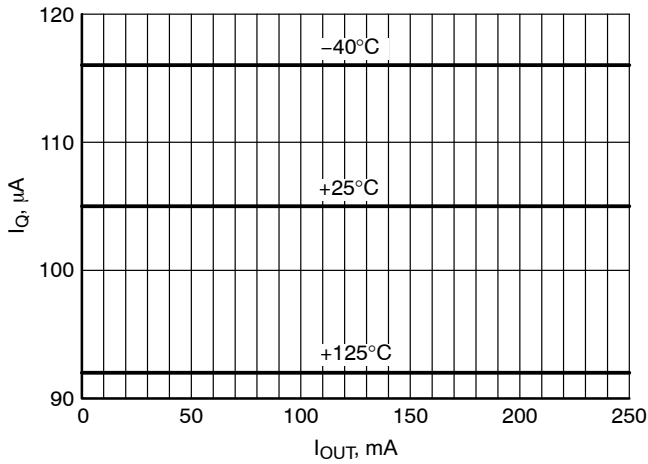


Figure 6. Quiescent Current vs Output Current

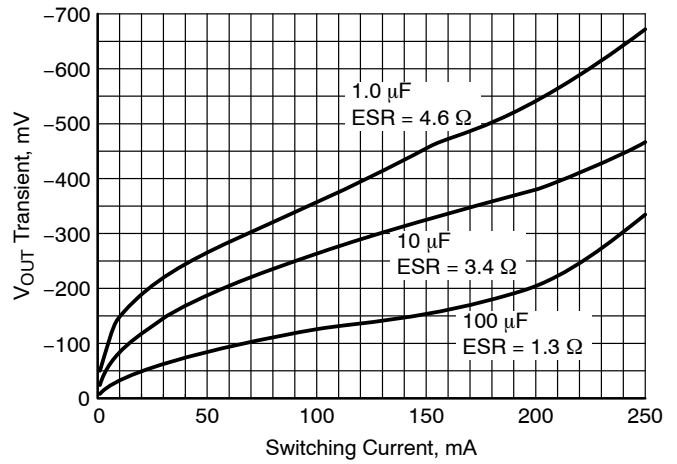


Figure 7. Load Transient Response

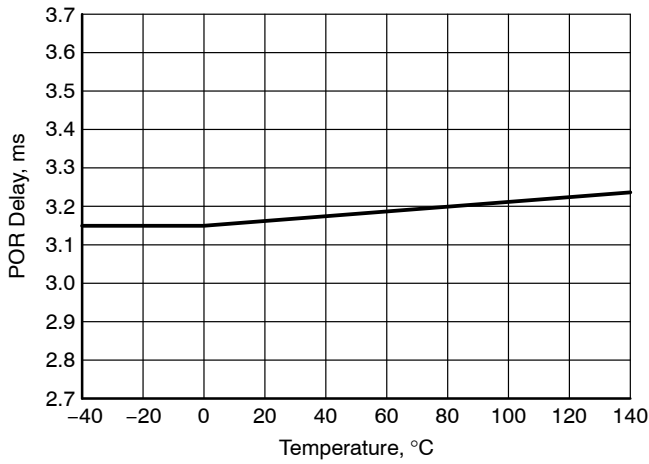


Figure 8. POR Delay vs Temp, $R_{DELAY} = 60\text{ k}\Omega$

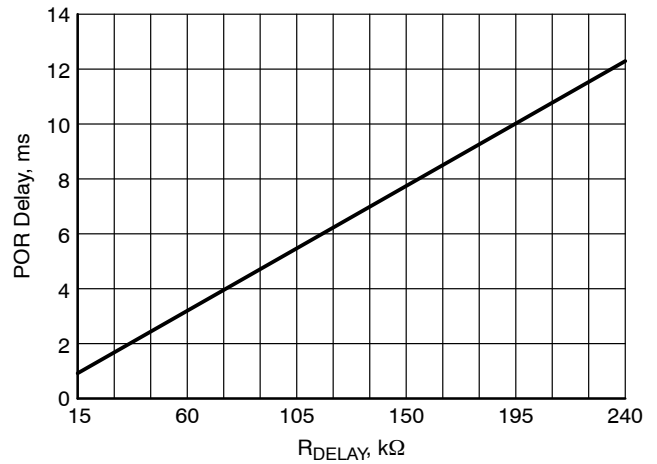


Figure 9. POR Delay vs R_{DELAY}

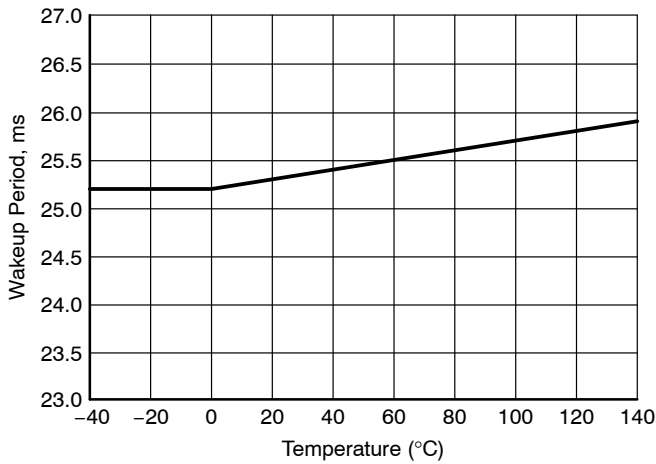


Figure 10. Wakeup Period vs Temp, $R_{DELAY} = 60\text{ k}\Omega$

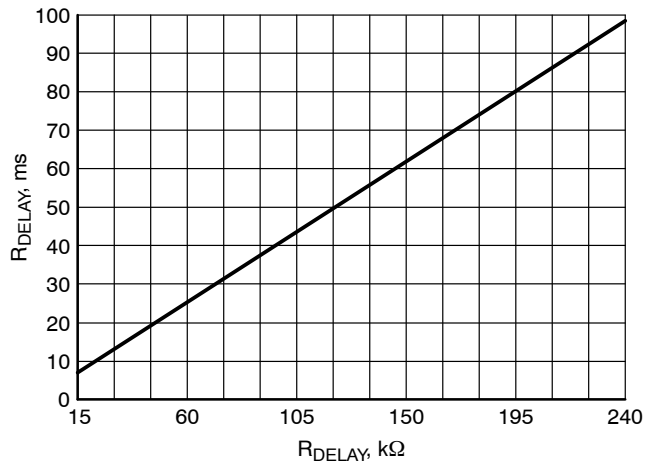


Figure 11. Wakeup Period vs R_{DELAY}

TYPICAL PERFORMANCE CHARACTERISTICS

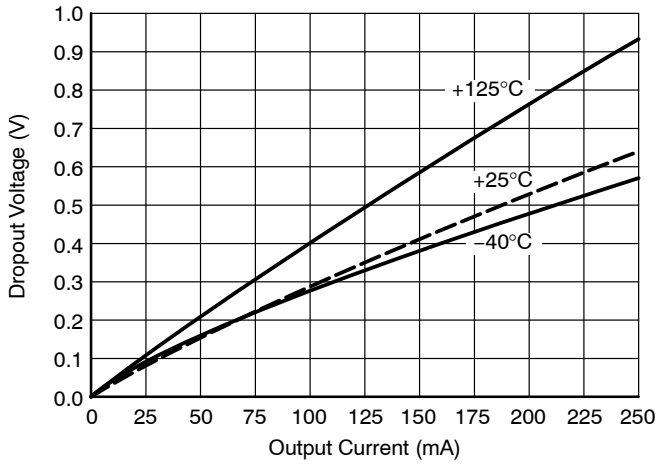


Figure 12. Dropout Voltage vs Output Current

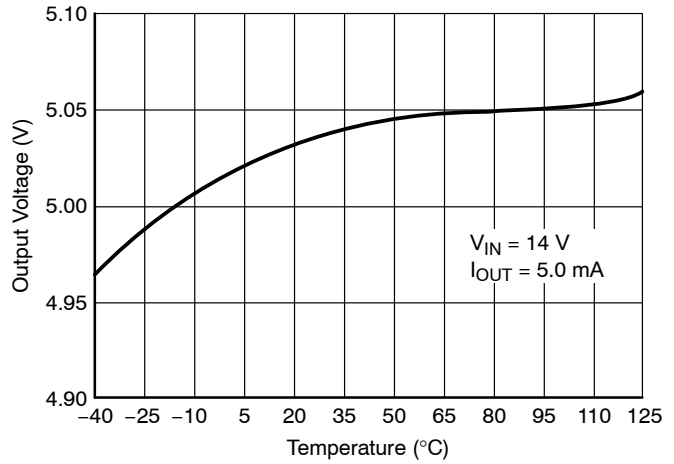


Figure 13. Output Voltage vs Temperature

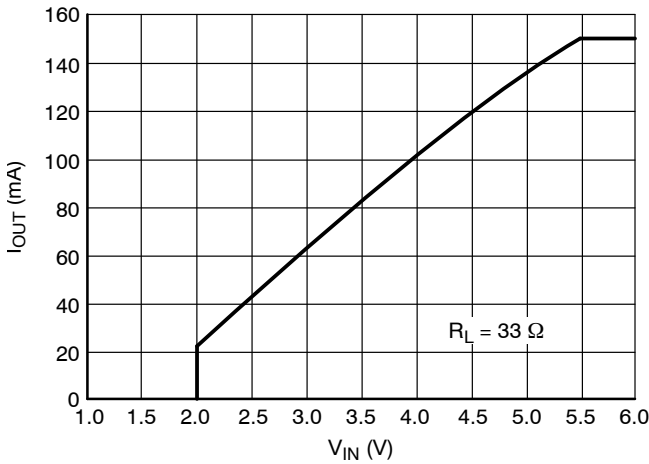


Figure 14. Output Current vs Input Voltage

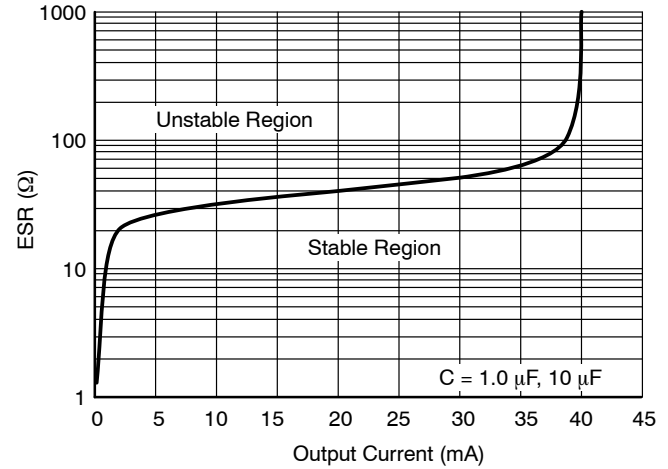


Figure 15. Output Capacitor ESR

DEFINITION OF TERMS

Dropout Voltage: The input–output voltage differential at which the circuit ceases to regulate against further reduction in input voltage. Measured when the output voltage has dropped 100 mV from the nominal value obtained at 14 V input, dropout voltage is dependent upon load current and junction temperature.

Input Voltage: The DC voltage applied to the input terminals with respect to ground.

Line Regulation: The change in output voltage for a change in the input voltage. The measurement is made under conditions of low dissipation or by using pulse techniques

such that the average chip temperature is not significantly affected.

Load Regulation: The change in output voltage for a change in load current at constant chip temperature.

Quiescent Current: The part of the positive input current that does not contribute to the positive load current. The regulator ground lead current.

Ripple Rejection: The ratio of the peak–to–peak input ripple voltage to the peak–to–peak output ripple voltage.

Current Limit: Peak current that can be delivered to the output.

DETAILED OPERATING DESCRIPTION

The NCV8508 is a precision micropower voltage regulator with very low quiescent current (100 μ A typical at 250 mA load). A typical dropout voltage is 450 mV at 150 mA. Microprocessor control logic includes Watchdog, Wakeup and $\overline{\text{RESET}}$. This unique combination of extremely low quiescent current and full microprocessor control makes the NCV8508 ideal for use in battery operated, microprocessor controlled equipment in addition to being a good fit in the automotive environment.

The NCV8508 Wakeup function brings the microprocessor out of Sleep mode. The microprocessor in turn signals its Wakeup status back to the NCV8508 by issuing a Watchdog signal.

The Watchdog logic function monitors an input signal (WDI) from the microprocessor. The NCV8508 responds to the falling edge of the Watchdog signal which it expects at least once during each Wakeup period. When the correct Watchdog signal is received, a falling edge is issued on the Wakeup signal line.

$\overline{\text{RESET}}$ is independent of V_{IN} and operates correctly to an output voltage as low as 1.0 V. A signal is issued in any of three situations. During power up, the $\overline{\text{RESET}}$ is held low until the output voltage is in regulation. During operation, if the output voltage shifts below the regulation limits, the $\overline{\text{RESET}}$ toggles low and remains low until proper output voltage regulation is restored. Finally, a $\overline{\text{RESET}}$ signal is issued if the regulator does not receive a Watchdog signal within the Wakeup period.

The $\overline{\text{RESET}}$ pulse width, Wakeup signal frequency, and Wakeup delay time are all set by one external resistor, R_{Delay} .

The Delay pin is a buffered bandgap voltage (1.25 V). It can be used as a reference for an external tracking regulator as shown in Figure 16.

The regulator is protected against short circuit and thermal runaway conditions. The device runs through 45 volt transients, making it suitable for use in automotive environments.

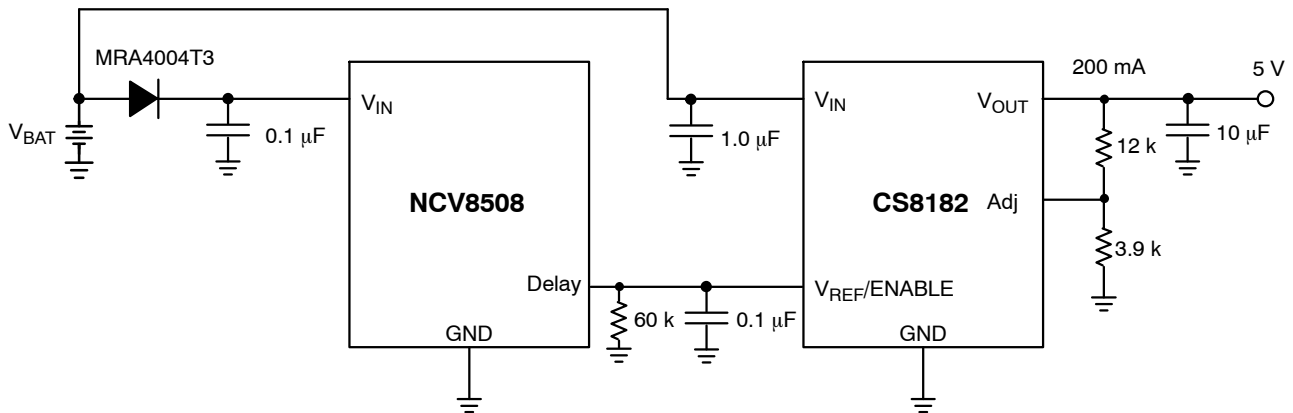


Figure 16. Application Circuit

CIRCUIT DESCRIPTION

Functional Description

To reduce the drain on the battery, a system can go into a low current consumption mode whenever it is not performing a main routine. The Wakeup signal is generated continuously and is used to interrupt a microcontroller that is in sleep mode. The nominal output is a 5.0 volt square wave (voltage generated from V_{OUT}) with a duty cycle of 50% at a frequency that is determined by a timing resistor, R_{Delay} .

When the microprocessor receives a rising edge from the Wakeup output, it must issue a Watchdog pulse and check its inputs to decide if it should resume normal operations or remain in the sleep mode.

The first falling edge of the Watchdog signal causes the Wakeup to go low within 2.0 μ s (typ) and remain low until the next Wakeup cycle (see Figure 17). Other Watchdog pulses received within the same cycle are ignored (Figure 3).

During power up, \overline{RESET} is held low until the output voltage is in regulation. During operation, if the output voltage shifts below the regulation limits, the \overline{RESET} toggles low and remains low until proper output voltage regulation is restored. After the \overline{RESET} delay, \overline{RESET} returns high.

The Watchdog circuitry continuously monitors the input Watchdog signal (WDI) from the microprocessor. The absence of a falling edge on the Watchdog input during one Wakeup cycle will cause a \overline{RESET} pulse to occur at the end of the Wakeup cycle. (see Figure 4).

The Wakeup output is pulled low during a \overline{RESET} regardless of the cause of the \overline{RESET} . After the \overline{RESET} returns high, the Wakeup cycle begins again (see Figure 4).

The \overline{RESET} Delay Time, Wakeup signal frequency and \overline{RESET} high to Wakeup delay time are all set by one external resistor R_{Delay} .

$$\text{Wakeup Period} = (4.17 \times 10^{-7})R_{Delay}$$

$$\overline{RESET} \text{ Delay Time} = (5.21 \times 10^{-8})R_{Delay}$$

$$\overline{RESET} \text{ HIGH to Wakeup Delay Time} = (2.08 \times 10^{-7})R_{Delay}$$

Resistor temperature coefficient and tolerance as well as the tolerance of the NCV8508 must be taken into account in order to get the correct system tolerance for each parameter.

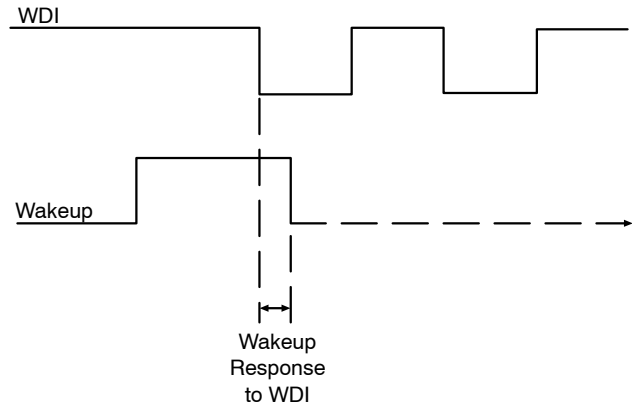


Figure 17. Wakeup Response to WDI

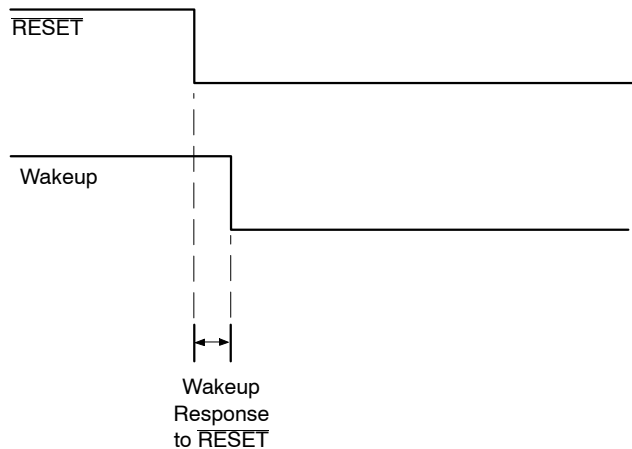


Figure 18. Wakeup Response to \overline{RESET} (Low Voltage)

THERMAL DATA

Recommend Thermal Data for SOIC-16 Package

| Parameter | Test Conditions Typical Value | | Units |
|---|-------------------------------|-----------------------|-------|
| | min-pad board (Note 6) | 1"-pad board (Note 7) | |
| Junction-to-Lead (ψ_{JL} , Ψ_{JL}) | 20 | 15 | °C/W |
| Junction-to-Ambient ($R_{\theta JA}$, θ_{JA}) | 100 | 83 | °C/W |

6. 1 oz. copper, 94 mm² copper area, 0.062" thick FR4.

7. 1 oz. copper, 767 mm² copper area, 0.062" thick FR4.

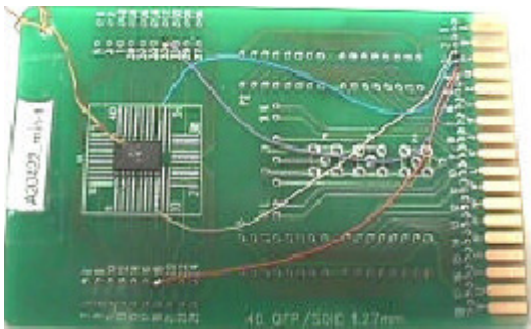


Figure 19. Min Pad PCB Layout

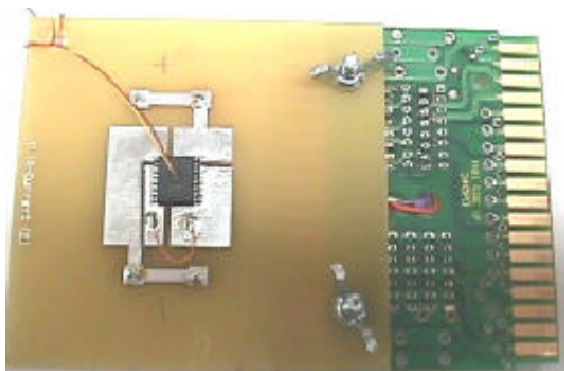


Figure 20. Min Pad PCB Layout

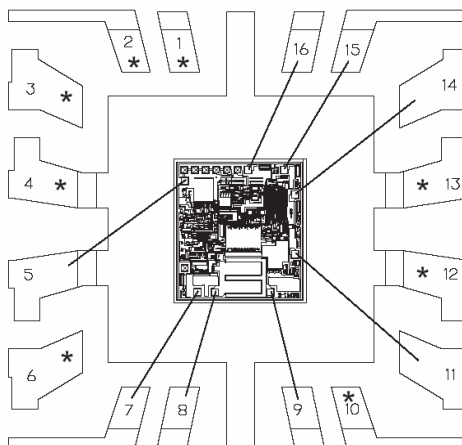


Figure 21. Internal Construction of the Package (notice pins 4, 5 and 12, 13 are connected to flag)

Table 1. SOIC 16-Lead Thermal RC Network Models

| | 96 mm ² | 767 mm ² | | 96 mm ² | 767 mm ² | Cu Area |
|---|--------------------|---------------------|-------|--------------------|---------------------|---------|
| | Cauer network | | | Foster network | | |
| | C's | C's | Units | Tau | Tau | units |
| 1 | 1.84E-06 | 1.84E-06 | W-s/C | 2.99E-07 | 2.99E-07 | sec |
| 2 | 8.69E-06 | 8.69E-06 | W-s/C | 4.40E-06 | 4.40E-06 | sec |
| 3 | 2.61E-05 | 2.61E-05 | W-s/C | 4.62E-05 | 4.62E-05 | sec |
| 4 | 8.98E-05 | 8.98E-05 | W-s/C | 5.08E-04 | 5.08E-04 | sec |
| 5 | 2.30E-03 | 2.30E-03 | W-s/C | 8.93E-03 | 8.95E-03 | sec |
| 6 | 2.99E-02 | 3.07E-02 | W-s/C | 2.04E-01 | 2.19E-01 | sec |
| 7 | 1.79E-01 | 1.90E-01 | W-s/C | 3.26E+00 | 2.75E+00 | sec |
| 8 | 7.79E-01 | 9.94E-01 | W-s/C | 3.21E+01 | 2.19E+01 | sec |
| 9 | 5.34E+00 | 3.98E+00 | W-s/C | 1.24E+02 | 1.20E+02 | sec |
| | | | | | | |
| | R's | R's | | R's | R's | |
| 1 | 0.199 | 0.199 | C/W | 0.123 | 0.123 | C/W |
| 2 | 0.598 | 0.598 | C/W | 0.349 | 0.349 | C/W |
| 3 | 1.795 | 1.795 | C/W | 1.057 | 1.057 | C/W |
| 4 | 4.085 | 4.085 | C/W | 4.61 | 4.61 | C/W |
| 5 | 3.977 | 3.977 | C/W | 3.87 | 3.89 | C/W |
| 6 | 7.509 | 7.833 | C/W | 5.77 | 5.99 | C/W |
| 7 | 19.886 | 15.247 | C/W | 13.17 | 11.38 | C/W |
| 8 | 40.307 | 24.781 | C/W | 28.85 | 15.52 | C/W |
| 9 | 18.193 | 21.446 | C/W | 38.75 | 37.05 | C/W |

NOTE: Bold face items in the Cauer network above, represent the package without the external thermal system. The Bold face items in the Foster network are computed by the square root of time constant $R(t) = 225 * \text{sqrt}(\text{time}(\text{sec}))$. The constant is derived based on the active area of the device with silicon and epoxy at the interface of the heat generation.

The Cauer networks generally have physical significance and may be divided between nodes to separate thermal behavior due to one portion of the network from another. The Foster networks, though when sorted by time constant (as above) bear a rough correlation with the Cauer networks, are really only convenient mathematical models. Cauer networks can be easily implemented using circuit simulating tools, whereas Foster networks may be more easily implemented using mathematical tools (for instance, in a spreadsheet program), according to the following formula:

$$R(t) = \sum_{i=1}^n R_i (1 - e^{-t/\tau_i})$$

θ_{JA} vs Copper Spreader Area

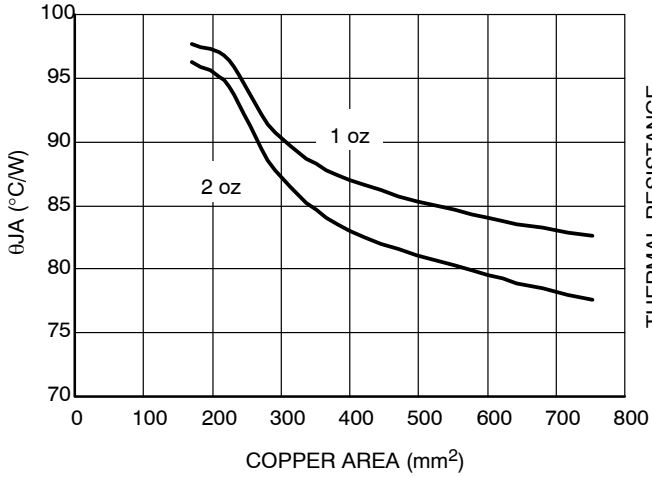


Figure 22. SOIC 16-Lead θ_{JA} as a Function of the Pad Copper Area Including Traces, Board Material

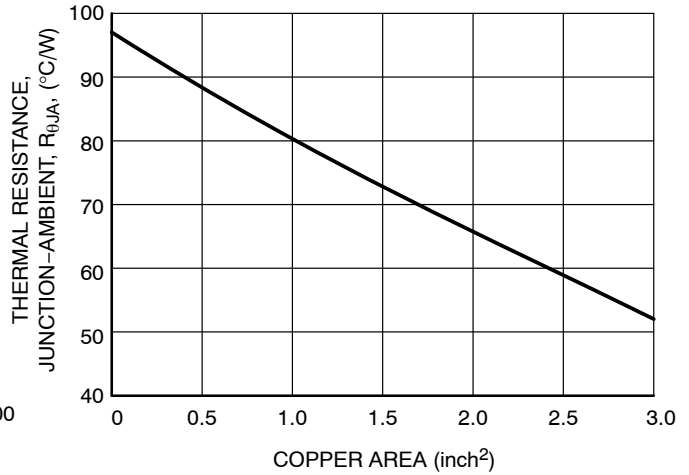


Figure 23. 16 Lead SOW (4 Leads Fused), θ_{JA} as a Function of the Pad Copper Area (2 oz. Cu Thickness), Board Material = 0.0625" G-10/R-4

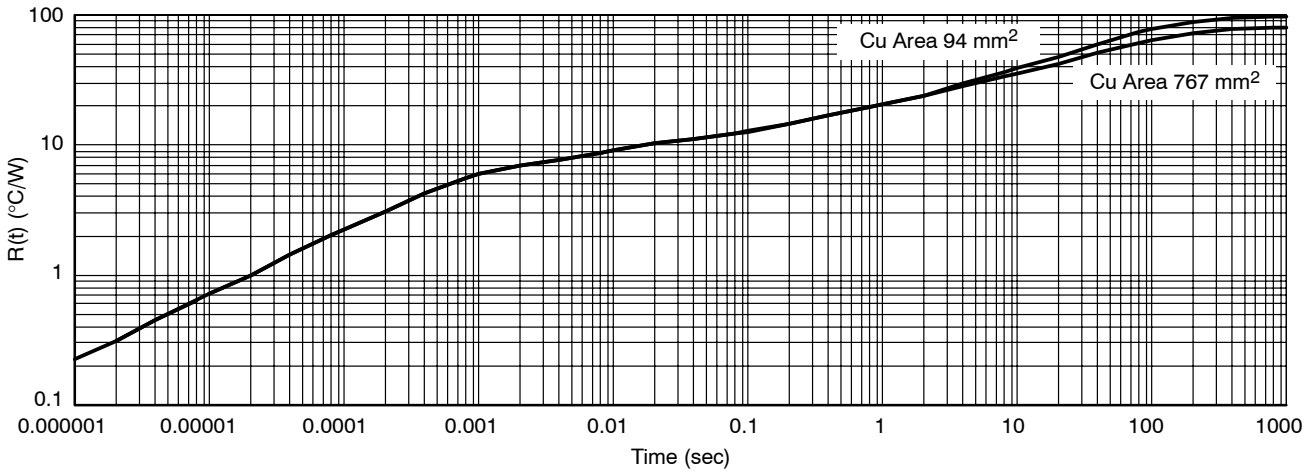


Figure 24. SOIC 16-Lead Single Pulse Heating Curve


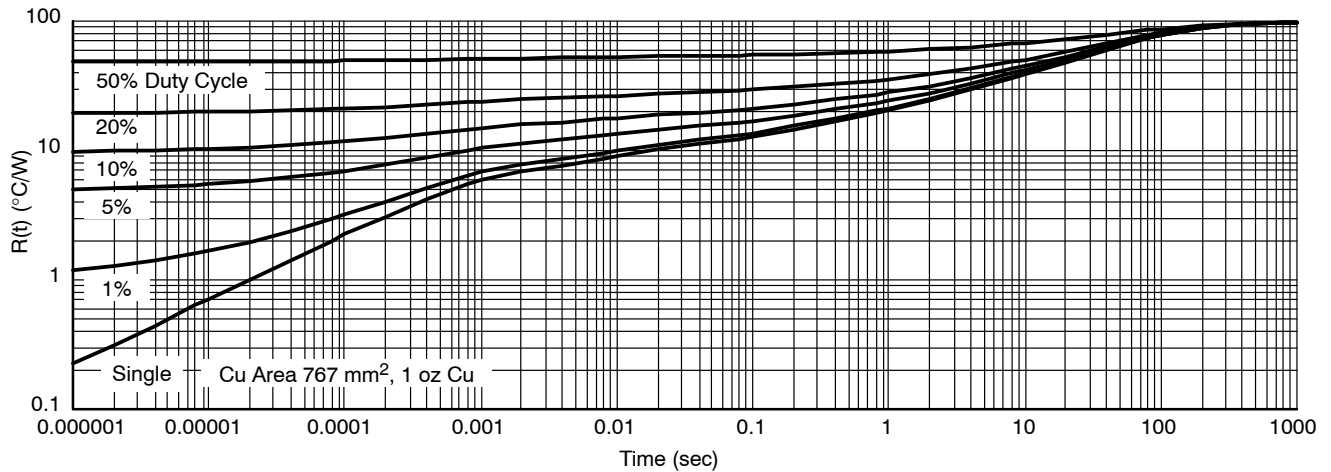



Figure 25. SOIC 16-Lead Thermal Duty Cycle Curves on 1" Spreader Test Board

NCV8508

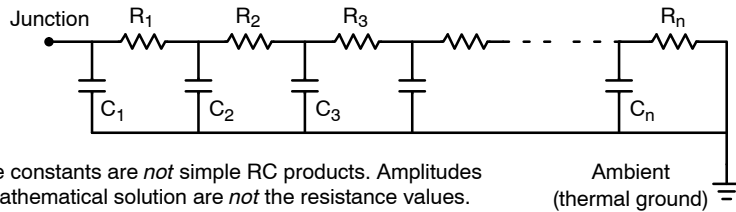

Time constants are *not* simple RC products. Amplitudes of mathematical solution are *not* the resistance values.

Figure 26. Grounded Capacitor Thermal Network (“Cauer” Ladder)

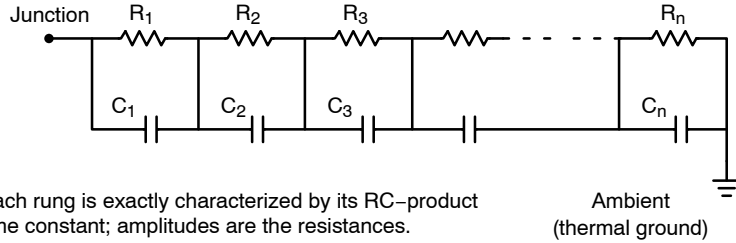

Each rung is exactly characterized by its RC-product time constant; amplitudes are the resistances.

Figure 27. Non-Grounded Capacitor Thermal Ladder (“Foster” Ladder)

Recommend Thermal Data for D²PAK-7 Package

| Parameter | Test Conditions Typical Value | | Units |
|---|-------------------------------|-----------------------|-------|
| | min-pad board (Note 8) | 1"-pad board (Note 9) | |
| Junction-to-Lead (ψ_{JL} , Ψ_{JL}) | 6.0 | 6.0 | °C/W |
| Junction-to-Ambient ($R_{\theta JA}$, θ_{JA}) | 78 | 44 | °C/W |

- 8. 1 oz. copper, 118 mm² copper area, 0.062" thick FR4.
- 9. 1 oz. copper, 626 mm² copper area, 0.062" thick FR4.

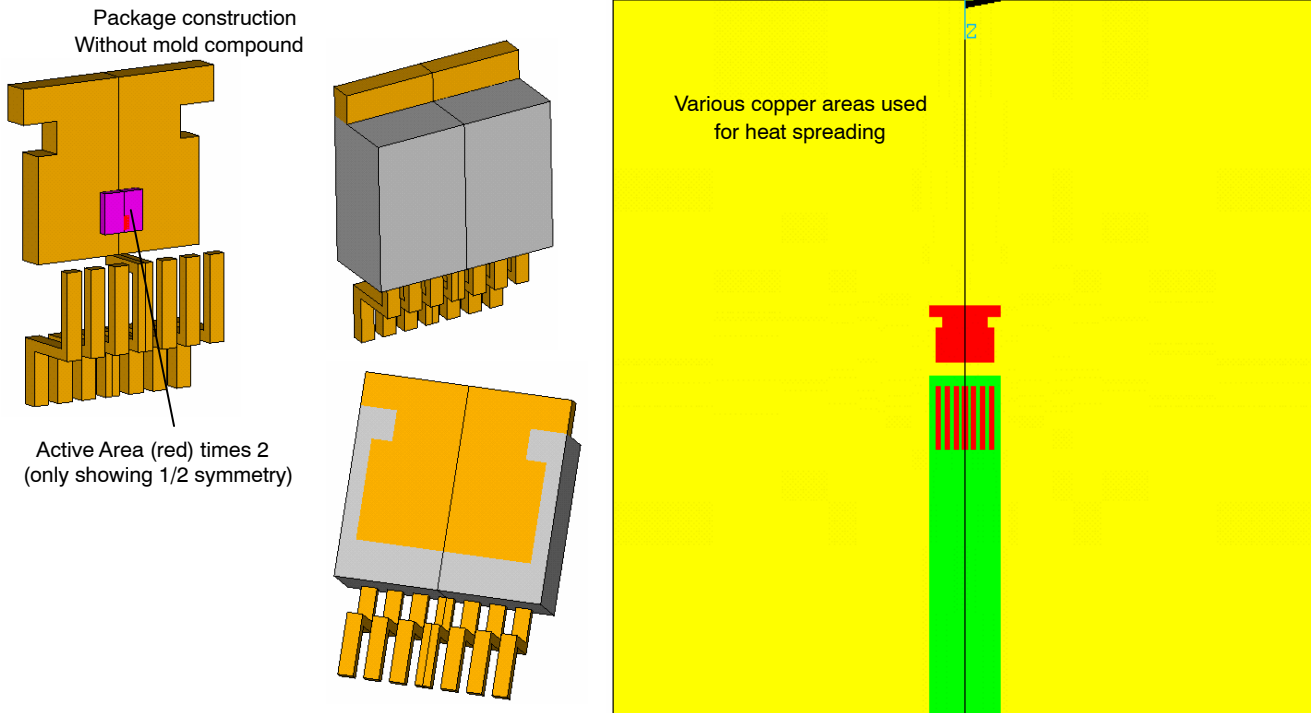


Figure 28. PCB Layout and Package Construction for Simulation

NCV8508

Table 2. D²PAK 7-Lead Thermal RC Network Models

| | 118 mm ² | 626 mm ² | | 118 mm ² | 626 mm ² | Cu Area |
|----|---------------------|---------------------|-------|---------------------|---------------------|---------|
| | Cauer Network | | | Foster Network | | |
| | C's | C's | Units | Tau | Tau | units |
| 1 | 1.45E-06 | 1.45E-06 | W-s/C | 1.00E-07 | 1.00E-07 | sec |
| 2 | 5.55E-06 | 5.58E-06 | W-s/C | 1.00E-06 | 1.00E-06 | sec |
| 3 | 1.57E-05 | 1.59E-05 | W-s/C | 1.00E-05 | 1.00E-05 | sec |
| 4 | 5.11E-05 | 5.22E-05 | W-s/C | 0.000 | 0.000 | sec |
| 5 | 3.48E-04 | 5.94E-04 | W-s/C | 0.001 | 0.002 | sec |
| 6 | 1.07E-02 | 6.62E-02 | W-s/C | 0.006 | 0.029 | sec |
| 7 | 2.65E-02 | 1.55E-01 | W-s/C | 0.020 | 0.080 | sec |
| 8 | 0.524 | 0.413 | W-s/C | 1.43 | 2.63 | sec |
| 9 | 0.490 | 2.441 | W-s/C | 6.52 | 3.6 | sec |
| 10 | 0.843 | 0.410 | W-s/C | 104.512 | 95.974 | sec |
| | | | | | | |
| | R's | R's | | R's | R's | |
| 1 | 0.089 | 0.089 | C/W | 5.25E-02 | 5.25E-02 | C/W |
| 2 | 0.210 | 0.208 | C/W | 1.14E-01 | 1.14E-01 | C/W |
| 3 | 0.637 | 0.624 | C/W | 3.59E-01 | 3.59E-01 | C/W |
| 4 | 1.899 | 2.107 | C/W | 1.5 | 1.9 | C/W |
| 5 | 1.883 | 2.454 | C/W | 2.6 | 3.0 | C/W |
| 6 | 1.398 | 0.952 | C/W | 0.1 | 0.1 | C/W |
| 7 | 0.315 | 0.360 | C/W | 1.7 | 0.9 | C/W |
| 8 | 14.348 | 7.042 | C/W | 0.1 | 0.1 | C/W |
| 9 | 5.621 | 20.823 | C/W | 7.2 | 4.6 | C/W |
| 10 | 51.986 | 9.649 | C/W | 64.8 | 33.3 | C/W |

NOTE: Bold face items in the Cauer network above, represent the package without the external thermal system. The Bold face items in the Foster network are computed by the square root of time constant $R(t) = 166 * \text{sqrt}(\text{time}(\text{sec}))$. The constant is derived based on the active area of the device with silicon and epoxy at the interface of the heat generation.

The Cauer networks generally have physical significance and may be divided between nodes to separate thermal behavior due to one portion of the network from another. The Foster networks, though when sorted by time constant (as above) bear a rough correlation with the Cauer networks, are really only convenient mathematical models. Cauer networks can be easily implemented using circuit simulating tools, whereas Foster networks may be more easily implemented using mathematical tools (for instance, in a spreadsheet program), according to the following formula:

$$R(t) = \sum_{i=1}^n R_i (1 - e^{-t/\tau_i})$$

θ JA vs Copper Spreader Area

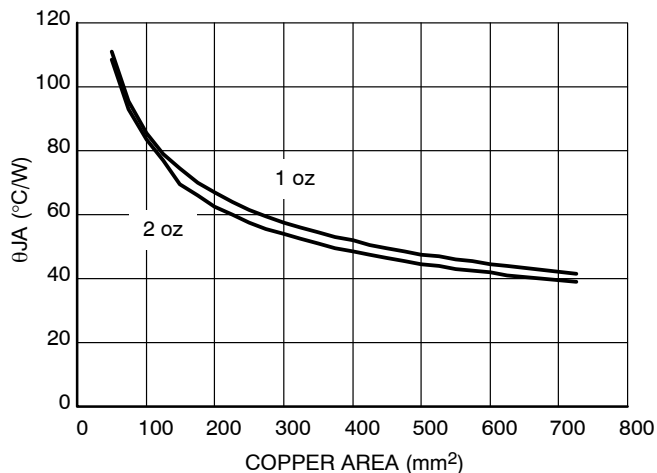


Figure 29. D²PAK 7-lead θ JA as a Function of the Pad Copper Area Including Traces, Board Material

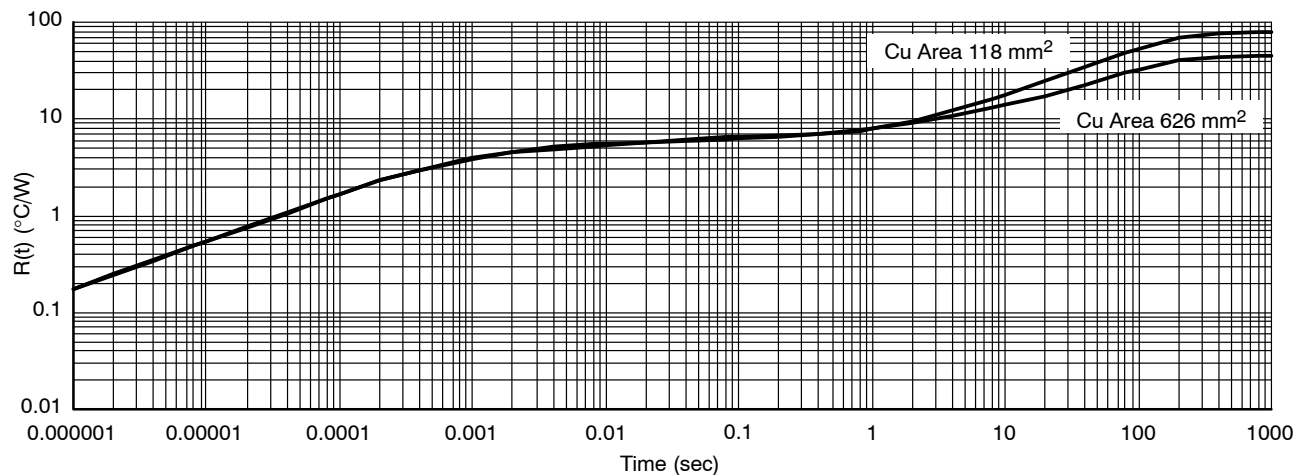


Figure 30. D²PAK 7-Lead Single Pulse Heating Curve


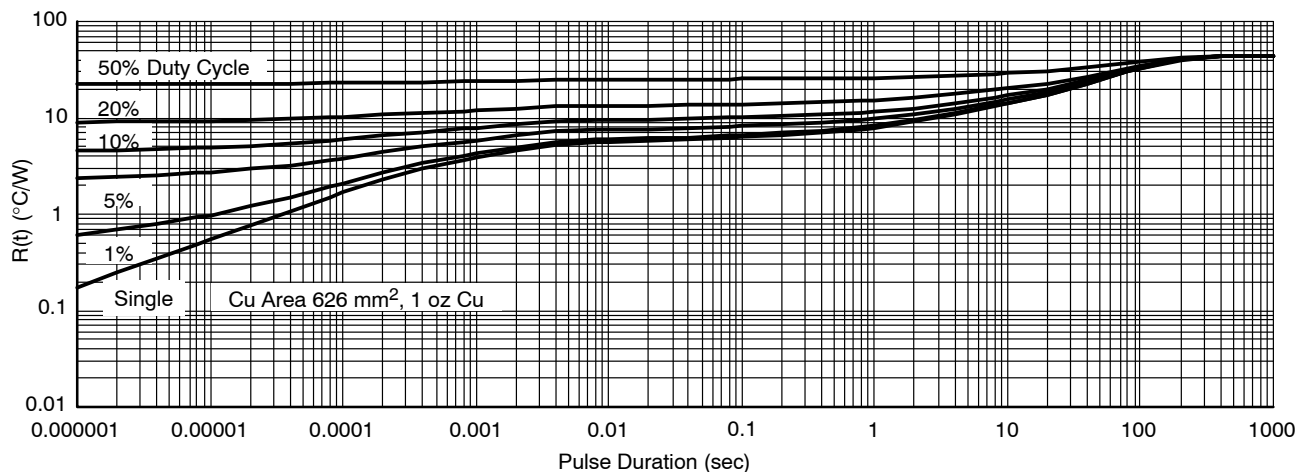



Figure 31. D²PAK 7-Lead Thermal Duty Cycle Curves on 1" Spreader Test Board

NCV8508

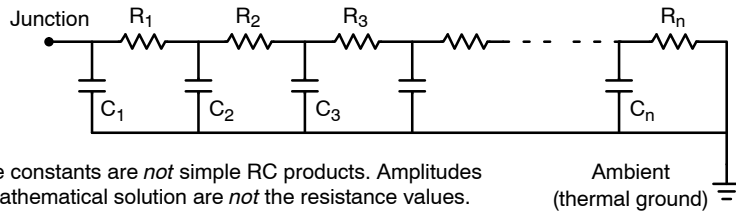

Time constants are *not* simple RC products. Amplitudes of mathematical solution are *not* the resistance values.

Figure 32. Grounded Capacitor Thermal Network (“Cauer” Ladder)

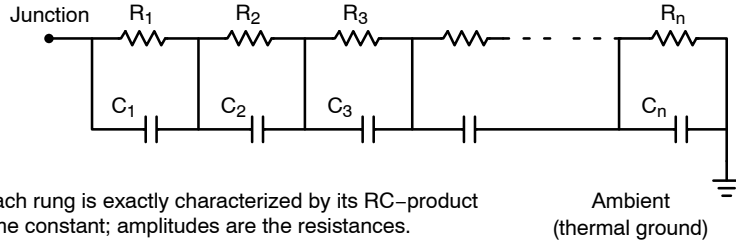

Each rung is exactly characterized by its RC-product time constant; amplitudes are the resistances.

Figure 33. Non-Grounded Capacitor Thermal Ladder (“Foster” Ladder)

Recommend Thermal Data for SOIC-8 EP Package

| Parameter | Test Conditions Typical Value | | Units |
|---|-------------------------------|------------------------|-------|
| | min-pad board (Note 10) | 1"-pad board (Note 11) | |
| Junction-to-Lead (ψ_{jL} , Ψ_{jL}) | 64 | 54 | °C/W |
| Junction-to-Lead (ψ_{jP} , Ψ_{jP}) | 14 | 11 | °C/W |
| Junction-to-Ambient ($R_{\theta JA}$, θ_{JA}) | 122 | 84 | °C/W |

10.1 oz. copper, 54 mm² copper area, 0.062" thick FR4.
 11.1 oz. copper, 717 mm² copper area, 0.062" thick FR4.

8-SOIC EP Half Symmetry

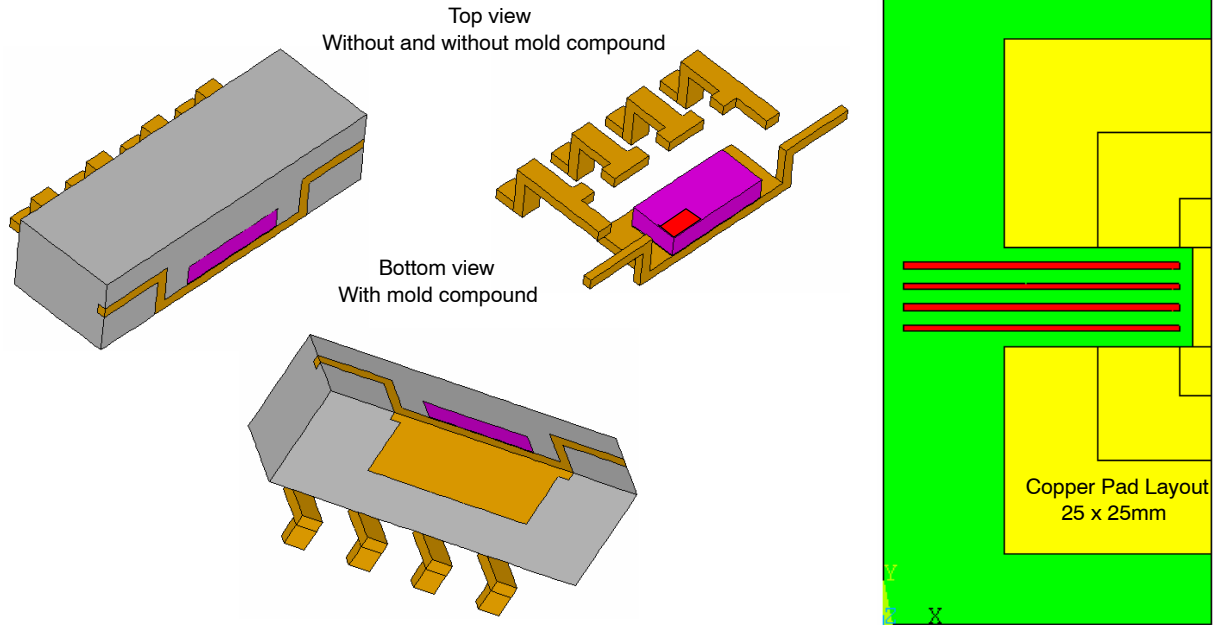


Figure 34. Internal Construction of the Package and PCB Layout for Multiple Pad Area

Table 3. SOIC 8-Lead EP Thermal RC Network Models

| | 54 mm ² | 717 mm ² | | 54 mm ² | 717 mm ² | Cu Area |
|----|--------------------|---------------------|-------|--------------------|---------------------|---------|
| | Cauer Network | | | Foster Network | | |
| | C's | C's | Units | Tau | Tau | units |
| 1 | 2.28E-06 | 2.28E-06 | W-s/C | 2.99E-07 | 2.99E-07 | sec |
| 2 | 1.08E-05 | 1.08E-05 | W-s/C | 4.40E-06 | 4.40E-06 | sec |
| 3 | 3.24E-05 | 3.24E-05 | W-s/C | 4.36E-05 | 4.36E-05 | sec |
| 4 | 9.71E-05 | 9.71E-05 | W-s/C | 3.59E-04 | 3.74E-04 | sec |
| 5 | 6.28E-04 | 7.55E-04 | W-s/C | 3.17E-03 | 4.59E-03 | sec |
| 6 | 7.13E-03 | 1.49E-02 | W-s/C | 0.030 | 0.162 | sec |
| 7 | 1.54E-02 | 9.28E-02 | W-s/C | 0.341 | 0.473 | sec |
| 8 | 6.16E-02 | 1.72E-01 | W-s/C | 2.909 | 1.653 | sec |
| 9 | 1.94E-01 | 3.83E-01 | W-s/C | 16.126 | 8.488 | sec |
| 10 | 1.52E+00 | 2.41E+00 | W-s/C | 54.334 | 71.562 | sec |
| | | | | | | |
| | R's | R's | | R's | R's | |
| 1 | 0.161 | 0.161 | C/W | 0.11 | 0.11 | C/W |
| 2 | 0.482 | 0.482 | C/W | 0.26 | 0.26 | C/W |
| 3 | 1.445 | 1.445 | C/W | 0.73 | 0.73 | C/W |
| 4 | 3.00 | 3.00 | C/W | 2.60 | 2.83 | C/W |
| 5 | 4.47 | 5.34 | C/W | 4.80 | 5.82 | C/W |
| 6 | 5.92 | 12.21 | C/W | 2.98 | 8.95 | C/W |
| 7 | 20.11 | 16.03 | C/W | 12.20 | 0.61 | C/W |
| 8 | 51.85 | 4.89 | C/W | 26.10 | 12.91 | C/W |
| 9 | 68.87 | 15.34 | C/W | 62.22 | 16.96 | C/W |
| 10 | 27.52 | 22.36 | C/W | 71.83 | 32.09 | C/W |

NOTE: Bold face items in the Cauer network above, represent the package without the external thermal system. The Bold face items in the Foster network are computed by the square root of time constant $R(t) = 225 * \text{sqrt}(\text{time}(\text{sec}))$. The constant is derived based on the active area of the device with silicon and epoxy at the interface of the heat generation.

The Cauer networks generally have physical significance and may be divided between nodes to separate thermal behavior due to one portion of the network from another. The Foster networks, though when sorted by time constant (as above) bear a rough correlation with the Cauer networks, are really only convenient mathematical models. Cauer networks can be easily implemented using circuit simulating tools, whereas Foster networks may be more easily implemented using mathematical tools (for instance, in a spreadsheet program), according to the following formula:

$$R(t) = \sum_{i=1}^n R_i (1 - e^{-t/\tau_i})$$

θ_{JA} vs Copper Spreader Area

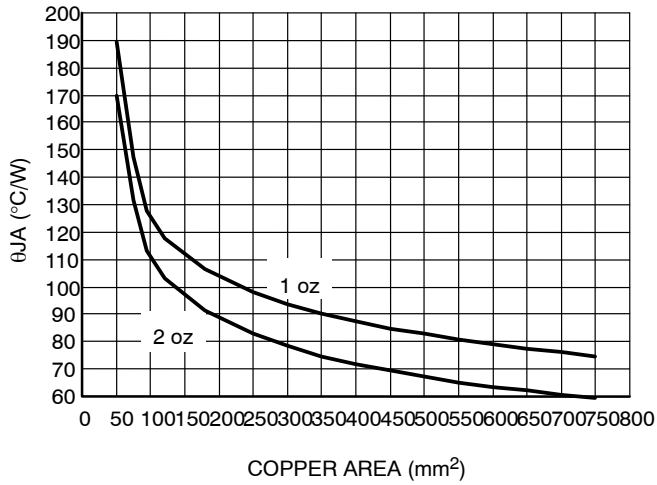


Figure 35. SOIC 8-Lead EP θ_{JA} as a Function of the Pad Copper Area Including Traces, Board Material

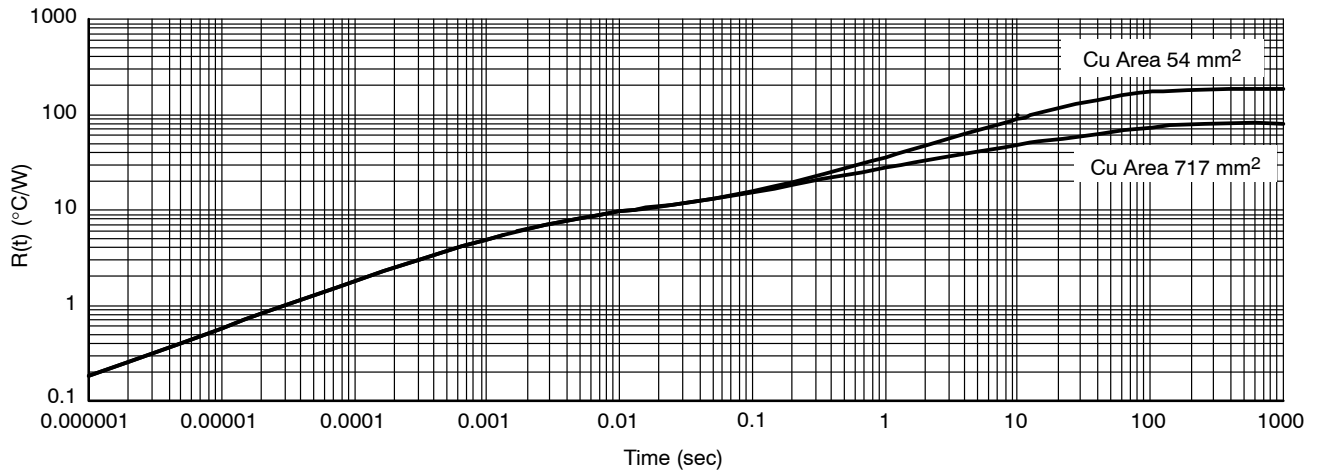


Figure 36. SOIC 8-Lead EP Single Pulse Heating Curve


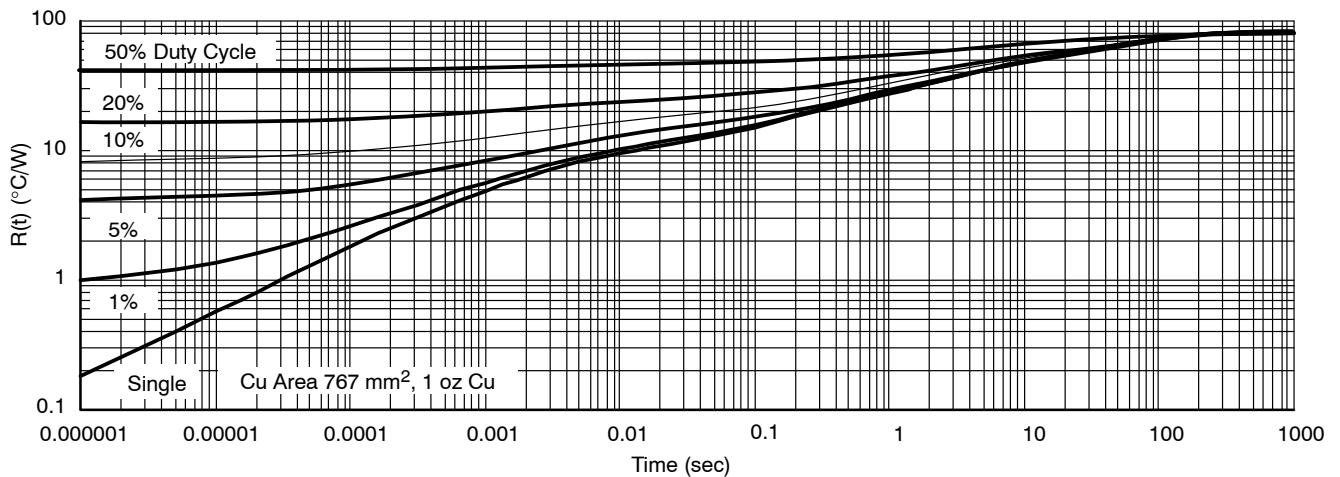



Figure 37. SOIC 8-Lead Thermal Duty Cycle Curves on 1" Spreader Test Board

NCV8508

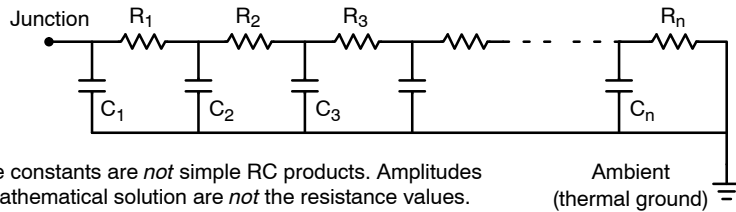

Time constants are *not* simple RC products. Amplitudes of mathematical solution are *not* the resistance values.

Figure 38. Grounded Capacitor Thermal Network (“Cauer” Ladder)

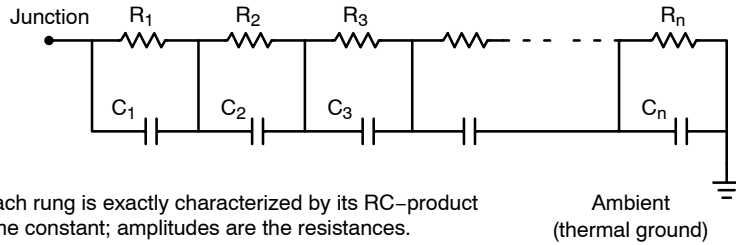

Each rung is exactly characterized by its RC-product time constant; amplitudes are the resistances.

Figure 39. Non-Grounded Capacitor Thermal Ladder (“Foster” Ladder)

APPLICATION NOTES

Calculating Power Dissipation in a Single Output Linear Regulator

The maximum power dissipation for a single output regulator (Figure 40) is:

$$P_{D(max)} = [V_{IN(max)} - V_{OUT(min)}]I_{OUT(max)} + V_{IN(max)}I_Q \quad (1)$$

where:

- $V_{IN(max)}$ is the maximum input voltage,
- $V_{OUT(min)}$ is the minimum output voltage,
- $I_{OUT(max)}$ is the maximum output current for the application, and
- I_Q is the quiescent current the regulator consumes at $I_{OUT(max)}$.

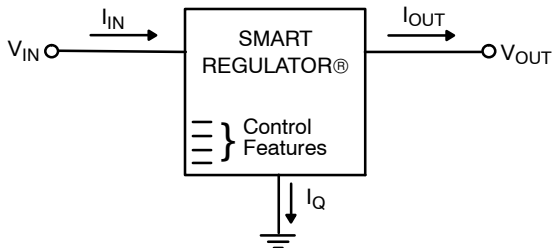


Figure 40. Single Output Regulator with Key Performance Parameters Labeled

Once the value of $P_{D(max)}$ is known, the maximum permissible value of $R_{\theta JA}$ can be calculated:

$$R_{\theta JA} = \frac{150^{\circ}C - T_A}{P_D} \quad (2)$$

The value of $R_{\theta JA}$ can then be compared with those in the package section of the data sheet. Those packages with $R_{\theta JA}$ s less than the calculated value in Equation 2 will keep the die temperature below 150°C.

In some cases, none of the packages will be sufficient to dissipate the heat generated by the IC, and an external heatsink will be required.

Heatsinks

A heatsink effectively increases the surface area of the package to improve the flow of heat away from the IC and into the surrounding air.

Each material in the heat flow path between the IC and the outside environment will have a thermal resistance. Like series electrical resistances, these resistances are summed to determine the value of $R_{\theta JA}$:

$$R_{\theta JA} = R_{\theta JC} + R_{\theta CS} + R_{\theta SA} \quad (3)$$

where:

- $R_{\theta JC}$ = the junction-to-case thermal resistance,
- $R_{\theta CS}$ = the case-to-heatsink thermal resistance, and
- $R_{\theta SA}$ = the heatsink-to-ambient thermal resistance.

$R_{\theta JC}$ appears in the package section of the data sheet. Like $R_{\theta JA}$, it too is a function of package type. $R_{\theta CS}$ and $R_{\theta SA}$ are functions of the package type, heatsink and the interface between them. These values appear in data sheets of heatsink manufacturers.

NCV8508

ORDERING INFORMATION

| Device | Output Voltage | Package | Shipping† |
|-----------------|----------------|-----------------------------------|--------------------|
| NCV8508DW50G | 5.0 V | SO-16L (Pb-Free) | 47 Units / Rail |
| NCV8508DW50R2G | 5.0 V | SO-16L (Pb-Free) | 1000 / Tape & Reel |
| NCV8508D2T50G | 5.0 V | D ² PAK-7 (Pb-Free) | 50 Units / Rail |
| NCV8508D2T50R4G | 5.0 V | D ² PAK-7 (Pb-Free) | 750 / Tape & Reel |
| NCV8508PD50G | 5.0 V | SO-8 EP (Pb-Free) | 98 Units / Rail |
| NCV8508PD50R2G | 5.0 V | SO-8 EP (Pb-Free) | 2500 / Tape & Reel |

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

MECHANICAL CASE OUTLINE PACKAGE DIMENSIONS

ON Semiconductor®









SCALE 1:1

SOIC-8 EP CASE 751AC ISSUE D

DATE 02 APR 2019

NOTES:


1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: MILLIMETERS
3. DIMENSION b DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE PROTRUSION SHALL BE 0.004 IN EXCESS OF MAXIMUM MATERIAL CONDITION.
4. DIMENSION D DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR GATE BURRS. MOLD FLASH, PROTRUSIONS, OR GATE BURRS SHALL NOT EXCEED 0.006 PER SIDE. DIMENSION E1 DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSION. INTERLEAD FLASH OR PROTRUSION SHALL NOT EXCEED 0.010 mm PER SIDE.
5. THE PACKAGE TOP MAY BE SMALLER THAN THE PACKAGE BOTTOM. DIMENSIONS D AND E1 ARE DETERMINED AT THE OUTERMOST EXTREMES OF THE PLASTIC BODY AT DATUM H.
6. DATUMS A AND B ARE TO BE DETERMINED AT DATUM H.
7. DIMENSIONS b AND c APPLY TO THE FLAT SECTION OF THE LEAD BETWEEN 0.10 TO 0.25 FROM THE LEAD TIP.
8. A1 IS DEFINED AS THE VERTICAL DISTANCE FROM THE SEATING PLANE TO THE LOWEST POINT ON THE PACKAGE BODY.

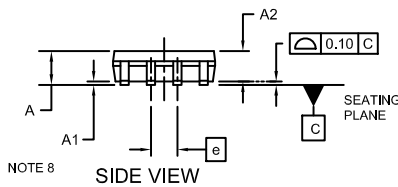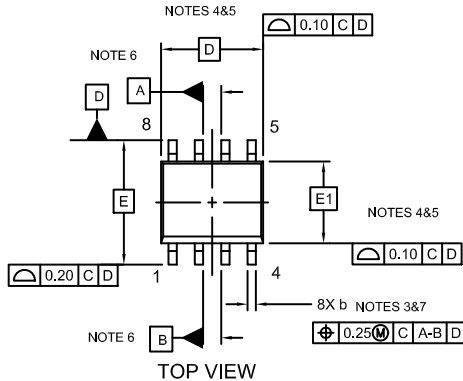

| DIM | MILLIMETERS | | |
|-----|-------------|------|------|
| | MIN. | NOM. | MAX. |
| A | 1.35 | 1.55 | 1.75 |
| A1 | --- | 0.05 | 0.10 |
| A2 | 1.35 | 1.50 | 1.65 |
| b | 0.31 | 0.41 | 0.51 |
| c | 0.17 | 0.21 | 0.23 |
| D | 4.90 BSC | | |
| E | 6.00 BSC | | |
| E1 | 3.90 BSC | | |
| e | 1.27 BSC | | |
| F | 2.24 | 2.72 | 3.20 |
| F1 | 0.15 | 0.20 | 0.25 |
| G | 1.55 | 2.03 | 2.51 |
| G1 | 0.41 | 0.46 | 0.51 |
| h | 0.25 | 0.38 | 0.50 |
| L | 0.40 | 0.84 | 1.27 |
| L1 | 1.04 REF | | |
| L2 | 0.25 REF | | |
| ∅ | 0° | 4° | 8° |

*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D."

GENERIC MARKING DIAGRAM*



XXXXXX = Specific Device Code
 A = Assembly Location
 Y = Year
 WW = Work Week
 ■ = Pb-Free Package

*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "■", may or may not be present and may be in either location. Some products may not follow the Generic Marking.

| | | |
|-------------------------|--------------------|--|
| DOCUMENT NUMBER: | 98AON14029D | Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| DESCRIPTION: | SOIC-8 EP | PAGE 1 OF 1 |

ON Semiconductor and ON are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.


MECHANICAL CASE OUTLINE PACKAGE DIMENSIONS



1
SCALE 1:1

SOIC-16 WB
CASE 751G
ISSUE E

DATE 08 OCT 2021



NOTES:

- DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
- CONTROLLING DIMENSION: MILLIMETERS
- DIMENSION b DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE PROTRUSION SHALL BE 0.13 TOTAL IN EXCESS OF B DIMENSION AT MAXIMUM MATERIAL CONDITION.
- DIMENSIONS D AND E DO NOT INCLUDE MOLD PROTRUSIONS.
- MAXIMUM MOLD PROTRUSION OR FLASH TO BE 0.15 PER SIDE.


| DIM | MILLIMETERS | |
|-----|-------------|-------|
| | MIN. | MAX. |
| A | 2.35 | 2.65 |
| A1 | 0.10 | 0.25 |
| B | 0.35 | 0.49 |
| C | 0.23 | 0.32 |
| D | 10.15 | 10.45 |
| E | 7.40 | 7.60 |
| e | 1.27 BSC | |
| H | 10.05 | 10.55 |
| h | 0.53 REF | |
| L | 0.50 | 0.90 |
| M | 0° | 7° |

GENERIC MARKING DIAGRAM*



- XXXXX = Specific Device Code
- A = Assembly Location
- WL = Wafer Lot
- YY = Year
- WW = Work Week
- G = Pb-Free Package

*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "▪", may or may not be present. Some products may not follow the Generic Marking.

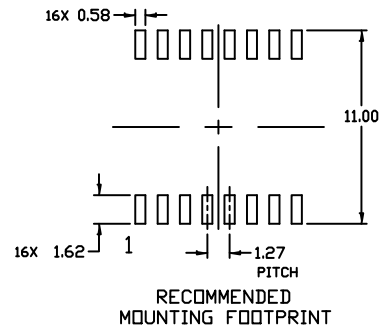

| | | |
|------------------|-------------|--|
| DOCUMENT NUMBER: | 98ASB42567B | Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| DESCRIPTION: | SOIC-16 WB | PAGE 1 OF 1 |

onsemi and onSEMI are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

MECHANICAL CASE OUTLINE


PACKAGE DIMENSIONS

ON Semiconductor®







D²PAK-7 (SHORT LEAD) CASE 936AB-01 ISSUE B

DATE 08 SEP 2009




SCALE 1:1

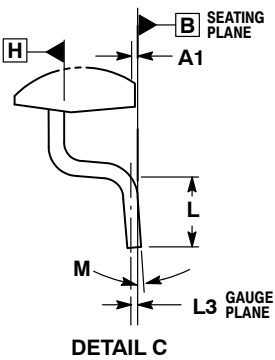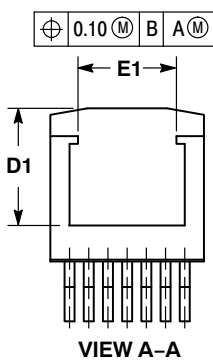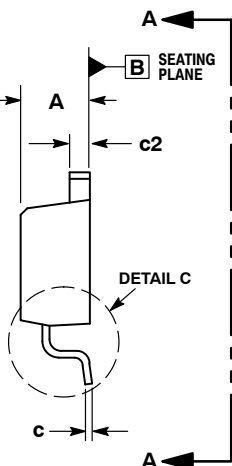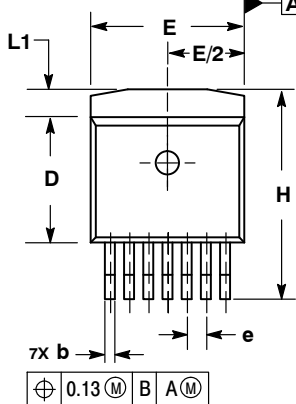


- NOTES:
1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
 2. CONTROLLING DIMENSION: INCHES.
 3. DIMENSIONS D AND E DO NOT INCLUDE MOLD FLASH AND GATE PROTRUSIONS. MOLD FLASH AND GATE PROTRUSIONS NOT TO EXCEED 0.005 MAXIMUM PER SIDE. THESE DIMENSIONS TO BE MEASURED AT DATUM H.
 4. THERMAL PAD CONTOUR OPTIONAL WITHIN DIMENSIONS E, L1, D1, AND E1. DIMENSIONS D1 AND E1 ESTABLISH A MINIMUM MOUNTING SURFACE FOR THE THERMAL PAD.

| DIM | INCHES | | MILLIMETERS | |
|-----|-----------|-------|-------------|-------|
| | MIN | MAX | MIN | MAX |
| A | 0.170 | 0.180 | 4.32 | 4.57 |
| A1 | 0.000 | 0.010 | 0.00 | 0.25 |
| b | 0.026 | 0.036 | 0.66 | 0.91 |
| c | 0.017 | 0.026 | 0.43 | 0.66 |
| c2 | 0.045 | 0.055 | 1.14 | 1.40 |
| D | 0.325 | 0.368 | 8.25 | 9.53 |
| D1 | 0.270 | --- | 6.86 | --- |
| E | 0.380 | 0.420 | 9.65 | 10.67 |
| E1 | 0.245 | --- | 6.22 | --- |
| e | 0.050 BSC | | 1.27 BSC | |
| H | 0.539 | 0.579 | 13.69 | 14.71 |
| L | 0.058 | 0.078 | 1.47 | 1.98 |
| L1 | --- | 0.066 | --- | 1.68 |
| L3 | 0.010 BSC | | 0.25 BSC | |
| M | 0° | | 8° | |

RECOMMENDED SOLDERING FOOTPRINT*

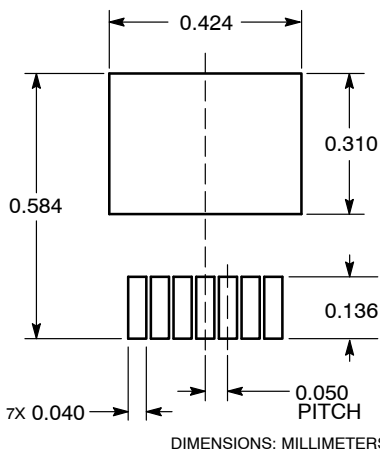

GENERIC MARKING DIAGRAM*



- XXXXXX = Specific Device Code
- A = Assembly Location
- WL = Wafer Lot
- Y = Year
- WW = Work Week
- G = Pb-Free Package

*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "▪", may or may not be present.

*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

| | | |
|------------------|-----------------------------------|--|
| DOCUMENT NUMBER: | 98AON14119D | Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| DESCRIPTION: | D ² PAK-7 (SHORT LEAD) | PAGE 1 OF 1 |

ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.

onsemi, **Onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Email Requests to: orderlit@onsemi.com

onsemi Website: www.onsemi.com

TECHNICAL SUPPORT

North American Technical Support:

Voice Mail: 1 800-282-9855 Toll Free USA/Canada

Phone: 011 421 33 790 2910

Europe, Middle East and Africa Technical Support:

Phone: 00421 33 790 2910

For additional information, please contact your local Sales Representative