

Is Now Part of



ON Semiconductor®

To learn more about ON Semiconductor, please visit our website at <u>www.onsemi.com</u>

Please note: As part of the Fairchild Semiconductor integration, some of the Fairchild orderable part numbers will need to change in order to meet ON Semiconductor's system requirements. Since the ON Semiconductor product management systems do not have the ability to manage part nomenclature that utilizes an underscore (_), the underscore (_) in the Fairchild part numbers will be changed to a dash (-). This document may contain device numbers with an underscore (_). Please check the ON Semiconductor website to verify the updated device numbers. The most current and up-to-date ordering information can be found at www.onsemi.com. Please email any questions regarding the system integration to Fairchild_questions@onsemi.com.

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or unavteries, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out or i, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor and is officers, employees, uniotificated use, even if such claim any manner.

November 2013



SGH40N60UF 600 V PT IGBT

General Description

Fairchild's UF series IGBTs provide low conduction and switching losses. UF series is designed for the applications such as general inverter and PFC where high speed switching is required feature.

Features

- High Speed Switching
- Low Saturation Voltage: $V_{CE(sat)} = 2.1 \text{ V} @ I_C = 20 \text{ A}$
- High Input Impedance

Application

• General Inverter, PFC





Absolute Maximum Ratings T_C = 25°C unless otherwise noted

Symbol	Description		Ratings	Unit
V _{CES}	Collector-Emitter Voltage		600	V
V _{GES}	Gate-Emitter Voltage		± 20	V
1	Collector Current	@ $T_{C} = 25^{\circ}C$	40	A
I _C	Collector Current	@ T _C = 100°C	20	A
I _{CM (1)}	Pulsed Collector Current	-	160	A
PD	Maximum Power Dissipation	@ T _C = 25°C	160	W
	Maximum Power Dissipation	@ T _C = 100°C	64	W
TJ	Operating Junction Temperature	-	-55 to +150	°C
T _{stg}	Storage Temperature Range		-55 to +150	°C
TL	Maximum Lead Temp. for Soldering Purposes, 1/8" from Case for 5 Seconds		300	°C

Notes :

(1) Repetitive rating : Pulse width limited by max. junction temperature


Thermal Characteristics


Symbol	Parameter	Тур.	Max.	Unit
R _{0JC}	Thermal Resistance, Junction-to-Case		0.77	°C/W
$R_{ hetaJA}$	Thermal Resistance, Junction-to-Ambient		40	°C/W


Symbol	Parameter	Test Conditions	Min.	Тур.	Max.	Unit
Off Cha	racteristics					
BV _{CES}	Collector-Emitter Breakdown Voltage	V _{GE} = 0 V, I _C = 250 uA	600			V
$\Delta B_{VCES}/\Delta T_J$	Temperature Coefficient of Breakdown Voltage	$V_{GE} = 0 V, I_C = 1 mA$		0.6		V/°C
I _{CES}	Collector Cut-Off Current	$V_{CE} = V_{CES}, V_{GE} = 0 V$			250	uA
I _{GES}	G-E Leakage Current	$V_{GE} = V_{GES}, V_{CE} = 0 V$			±100	nA
On Char	racteristics					
V _{GE(th)}	G-E Threshold Voltage	I_{C} = 20 mA, V_{CE} = V_{GE}	3.5	4.5	6.5	V
	Collector to Emitter	$I_{\rm C} = 20$ A, $V_{\rm GE} = 15$ V		2.1	2.6	V
V _{CE(sat)}	Saturation Voltage	$I_{\rm C} = 40$ A, $V_{\rm GE} = 15$ V		2.6		V
Dvnami	c Characteristics					
C _{ies}	Input Capacitance			1430		pF
0	Output Capacitance	$V_{CE} = 30 V, V_{GE} = 0 V,$		170		pF
Case						
C _{res}	Reverse Transfer Capacitance	f = 1 MHz		50		
	Reverse Transfer Capacitance	f = 1 MHz		50		pF
C _{res} Switchir t _{d(on)}	Reverse Transfer Capacitance Ig Characteristics Turn-On Delay Time	f = 1 MHz		50		pF ns
C _{res} Switchir t _{d(on)} t _r	Reverse Transfer Capacitance Turn-On Delay Time Rise Time			50 15 30		pF ns ns
C _{res} Switchir t _{d(on)} t _r t _{d(off)}	Reverse Transfer Capacitance ng Characteristics Turn-On Delay Time Rise Time Turn-Off Delay Time	V _{CC} = 300 V, I _C = 20 A,		50 15 30 65	 130	pF ns ns
C _{res} Switchir t _{d(on)} t _r t _{d(off)} t _f	Reverse Transfer Capacitance og Characteristics Turn-On Delay Time Rise Time Turn-Off Delay Time Fall Time	$V_{CC} = 300 \text{ V}, \text{ I}_{C} = 20 \text{ A},$ $R_{G} = 10 \Omega, V_{GE} = 15 \text{ V},$		50 15 30 65 50	 130 150	pF ns ns ns ns
C _{res} Switchir t _{d(on)} t _r t _{d(off)} t _f E _{on}	Reverse Transfer Capacitance og Characteristics Turn-On Delay Time Rise Time Turn-Off Delay Time Fall Time Turn-On Switching Loss	V _{CC} = 300 V, I _C = 20 A,	 	50 15 30 65 50 160	 130 150 	pF ns ns ns uJ
C _{res} Switchir t _{d(on)} t _r t _{d(off)} t _f E _{on} E _{off}	Reverse Transfer Capacitance ng Characteristics Turn-On Delay Time Rise Time Turn-Off Delay Time Fall Time Turn-On Switching Loss Turn-Off Switching Loss	$V_{CC} = 300 \text{ V}, \text{ I}_{C} = 20 \text{ A},$ $R_{G} = 10 \Omega, V_{GE} = 15 \text{ V},$	 	50 15 30 65 50 160 200	 130 150 	pF ns ns ns uJ uJ
$\frac{C_{res}}{Switchir}$ $\frac{t_{d(on)}}{t_r}$ $\frac{t_{d(off)}}{t_f}$ E_{on} E_{ts}	Reverse Transfer Capacitance og Characteristics Turn-On Delay Time Rise Time Turn-Off Delay Time Fall Time Turn-On Switching Loss Turn-Off Switching Loss Total Switching Loss	$V_{CC} = 300 \text{ V}, \text{ I}_{C} = 20 \text{ A},$ $R_{G} = 10 \Omega, V_{GE} = 15 \text{ V},$	 	50 15 30 65 50 160 200 360	 130 150 600	pF ns ns ns uJ uJ uJ
$\frac{C_{res}}{Switchir}$ $\frac{t_{d(on)}}{t_r}$ $\frac{t_{d(off)}}{t_f}$ E_{on} E_{ts} $t_{d(on)}$	Reverse Transfer Capacitance ng Characteristics Turn-On Delay Time Rise Time Turn-Off Delay Time Fall Time Turn-On Switching Loss Turn-Off Switching Loss Total Switching Loss Turn-On Delay Time	$V_{CC} = 300 \text{ V}, \text{ I}_{C} = 20 \text{ A},$ $R_{G} = 10 \Omega, V_{GE} = 15 \text{ V},$	 	50 15 30 65 50 160 200 360 30	 130 150 600 	pF ns ns ns uJ uJ uJ uJ
$\frac{C_{res}}{Switchir}$ $\frac{t_{d(on)}}{t_r}$ $\frac{t_{d(off)}}{t_f}$ E_{on} E_{ts} $\frac{t_{d(on)}}{t_r}$ t_r	Reverse Transfer Capacitance ng Characteristics Turn-On Delay Time Rise Time Turn-Off Delay Time Fall Time Turn-On Switching Loss Turn-Off Switching Loss Total Switching Loss Turn-On Delay Time Rise Time Rise Time	$V_{CC} = 300 \text{ V}, \text{ I}_{C} = 20 \text{ A},$ $R_{G} = 10 \Omega, V_{GE} = 15 \text{ V},$ Inductive Load, $T_{C} = 25^{\circ}\text{C}$	 	50 15 30 65 50 160 200 360 30 37	 130 150 600 	pF ns ns ns uJ uJ uJ ns ns
$\frac{C_{res}}{Switchir}$ $\frac{t_{d(on)}}{t_r}$ $\frac{t_{d(off)}}{t_f}$ E_{on} E_{ts} $\frac{t_{d(on)}}{t_r}$ $\frac{t_r}{t_r}$ $\frac{t_{d(off)}}{t_f}$	Reverse Transfer Capacitance g Characteristics Turn-On Delay Time Rise Time Turn-Off Delay Time Fall Time Turn-On Switching Loss Turn-Off Switching Loss Total Switching Loss Turn-On Delay Time Rise Time Turn-Off Switching Loss Turn-On Delay Time Rise Time Turn-Off Delay Time Rise Time Turn-Off Delay Time	$V_{CC} = 300 \text{ V}, \text{ I}_{C} = 20 \text{ A},$ $R_{G} = 10 \Omega, V_{GE} = 15 \text{ V},$ Inductive Load, $T_{C} = 25^{\circ}\text{C}$ $V_{CC} = 300 \text{ V}, \text{ I}_{C} = 20 \text{ A},$	 	50 15 30 65 50 160 200 360 30 37 110	 130 150 600 200	pF ns ns ns uJ uJ uJ ns ns ns
$\frac{C_{res}}{Switchir}$ $\frac{t_{d(on)}}{t_r}$ $\frac{t_{d(off)}}{t_f}$ E_{on} E_{off} E_{ts} $\frac{t_{d(on)}}{t_r}$ $\frac{t_{d(off)}}{t_f}$	Reverse Transfer Capacitance g Characteristics Turn-On Delay Time Rise Time Turn-Off Delay Time Fall Time Turn-On Switching Loss Turn-Off Switching Loss Total Switching Loss Turn-On Delay Time Rise Time Turn-Off Delay Time Fall Time Turn-Off Switching Loss Turn-On Delay Time Rise Time Turn-Off Delay Time Fall Time	$V_{CC} = 300 \text{ V}, \text{ I}_{C} = 20 \text{ A},$ R_G = 10 Ω , V_GE = 15 V, Inductive Load, T_C = 25°C $V_{CC} = 300 \text{ V}, \text{ I}_{C} = 20 \text{ A},$ R_G = 10 Ω , V_GE = 15 V,	 	50 15 30 65 50 160 200 360 30 37 110 144	 130 150 600 200 250	pF ns ns ns uJ uJ uJ uJ ns ns ns ns
$\frac{C_{res}}{Switchir}$ $\frac{t_{d(on)}}{t_r}$ $\frac{t_{d(off)}}{t_f}$ E_{on} E_{ts} $\frac{t_{d(on)}}{t_r}$ $\frac{t_{d(off)}}{t_f}$ E_{on}	Reverse Transfer Capacitance g Characteristics Turn-On Delay Time Rise Time Turn-Off Delay Time Fall Time Turn-On Switching Loss Total Switching Loss Turn-On Delay Time Rise Time Turn-Off Switching Loss Turn-On Delay Time Rise Time Turn-On Delay Time Rise Time Turn-Off Delay Time Fall Time Turn-Off Delay Time Fall Time Turn-On Switching Loss	$V_{CC} = 300 \text{ V}, \text{ I}_{C} = 20 \text{ A},$ $R_{G} = 10 \Omega, V_{GE} = 15 \text{ V},$ Inductive Load, $T_{C} = 25^{\circ}\text{C}$ $V_{CC} = 300 \text{ V}, \text{ I}_{C} = 20 \text{ A},$	 	50 15 30 65 50 160 200 360 30 37 110 144 310	 130 150 600 200 250 	pF ns ns ns uJ uJ uJ uJ ns ns ns uJ
$\frac{C_{res}}{Switchir}$ $\frac{t_{d(on)}}{t_r}$ $\frac{t_{d(off)}}{t_f}$ E_{off} E_{ts} $\frac{t_{d(on)}}{t_r}$ $\frac{t_{d(off)}}{t_f}$ E_{on} E_{off} E_{off}	Reverse Transfer Capacitance g Characteristics Turn-On Delay Time Rise Time Turn-Off Delay Time Fall Time Turn-On Switching Loss Turn-Off Switching Loss Total Switching Loss Turn-On Delay Time Rise Time Turn-On Delay Time Rise Time Turn-Off Delay Time Fall Time Turn-Off Switching Loss	$V_{CC} = 300 \text{ V}, \text{ I}_{C} = 20 \text{ A},$ R_G = 10 Ω , V_GE = 15 V, Inductive Load, T_C = 25°C $V_{CC} = 300 \text{ V}, \text{ I}_{C} = 20 \text{ A},$ R_G = 10 Ω , V_GE = 15 V,	 	50 15 30 65 50 160 200 360 30 37 110 144 310 430	 130 150 600 200 250 	pF ns ns ns uJ uJ uJ ns ns ns ns uJ uJ uJ
$\frac{C_{res}}{Switchir}$ $\frac{t_{d(on)}}{t_r}$ $\frac{t_{d(off)}}{t_f}$ E_{on} E_{ts} $\frac{t_{d(on)}}{t_r}$ $\frac{t_{d(on)}}{t_r}$ $\frac{t_{d(off)}}{t_f}$ E_{on} E_{on} E_{on} E_{off} E_{ts}	Reverse Transfer Capacitance g Characteristics Turn-On Delay Time Rise Time Turn-Off Delay Time Fall Time Turn-On Switching Loss Total Switching Loss Turn-On Delay Time Rise Time Turn-Off Switching Loss Turn-On Delay Time Rise Time Turn-Off Delay Time Fall Time Turn-Off Delay Time Fall Time Turn-Off Switching Loss Turn-Off Switching Loss Turn-Off Switching Loss Total Switching Loss Total Switching Loss Total Switching Loss Total Switching Loss	$V_{CC} = 300 \text{ V}, \text{ I}_{C} = 20 \text{ A},$ R_G = 10 Ω , V_GE = 15 V, Inductive Load, T_C = 25°C $V_{CC} = 300 \text{ V}, \text{ I}_{C} = 20 \text{ A},$ R_G = 10 Ω , V_GE = 15 V, Inductive Load, T_C = 125°C	 	50 15 30 65 50 160 200 360 30 37 110 144 310 430 740	 130 150 600 200 250 1200	pF ns ns ns uJ uJ uJ uJ ns ns ns ns uJ uJ uJ uJ
$\begin{array}{c} C_{res} \\ \hline \\ $	Reverse Transfer Capacitance og Characteristics Turn-On Delay Time Rise Time Turn-Off Delay Time Fall Time Turn-On Switching Loss Total Switching Loss Turn-On Delay Time Rise Time Turn-Off Delay Time Rise Time Turn-On Delay Time Rise Time Turn-Off Delay Time Fall Time Turn-Off Switching Loss Turn-Off Switching Loss Turn-Off Switching Loss Turn-Off Switching Loss Total Gate Charge	$V_{CC} = 300 \text{ V}, \text{ I}_{C} = 20 \text{ A},$ $R_{G} = 10 \Omega, \text{ V}_{GE} = 15 \text{ V},$ Inductive Load, $T_{C} = 25^{\circ}\text{C}$ $V_{CC} = 300 \text{ V}, \text{ I}_{C} = 20 \text{ A},$ $R_{G} = 10 \Omega, \text{ V}_{GE} = 15 \text{ V},$ Inductive Load, $T_{C} = 125^{\circ}\text{C}$ $V_{CE} = 300 \text{ V}, \text{ I}_{C} = 20 \text{ A},$	 	50 15 30 65 50 160 200 360 30 37 110 144 310 430 740 97	 130 150 600 200 250 1200 150	pF ns ns ns uJ uJ uJ ns ns ns ns uJ uJ uJ uJ uJ
$\frac{C_{res}}{Switchir}$ $\frac{t_{d(on)}}{t_r}$ $\frac{t_{d(off)}}{t_f}$ E_{on} E_{ts} $\frac{t_{d(on)}}{t_r}$ $\frac{t_{d(on)}}{t_r}$ $\frac{t_{d(off)}}{t_f}$ E_{on} E_{on} E_{on} E_{off} E_{ts}	Reverse Transfer Capacitance g Characteristics Turn-On Delay Time Rise Time Turn-Off Delay Time Fall Time Turn-On Switching Loss Total Switching Loss Turn-On Delay Time Rise Time Turn-Off Switching Loss Turn-On Delay Time Rise Time Turn-Off Delay Time Fall Time Turn-Off Delay Time Fall Time Turn-Off Switching Loss Turn-Off Switching Loss Turn-Off Switching Loss Total Switching Loss Total Switching Loss Total Switching Loss Total Switching Loss	$V_{CC} = 300 \text{ V}, \text{ I}_{C} = 20 \text{ A},$ R_G = 10 Ω , V_GE = 15 V, Inductive Load, T_C = 25°C $V_{CC} = 300 \text{ V}, \text{ I}_{C} = 20 \text{ A},$ R_G = 10 Ω , V_GE = 15 V, Inductive Load, T_C = 125°C	 	50 15 30 65 50 160 200 360 30 37 110 144 310 430 740	 130 150 600 200 250 1200	pF ns ns ns uJ uJ uJ uJ ns ns ns ns uJ uJ uJ uJ


Electrical Characteristics of the IGBT T_C = 25°C unless otherwise note

SGH40N60UF - 600 V PT IGBT















Fig 5. Saturation Voltage vs. $\rm V_{GE}$


















SGH40N60UF - 600 V PT IGBT

























Fig 10. Switching Loss vs. Gate Resistance





SGH40N60UF - 600 V PT IGBT




Fig 13. Switching Loss vs. Collector Current




Fig 14. Gate Charge Characteristics




Fig 15. SOA Characteristics




Fig 16. Turn-Off SOA Characteristics


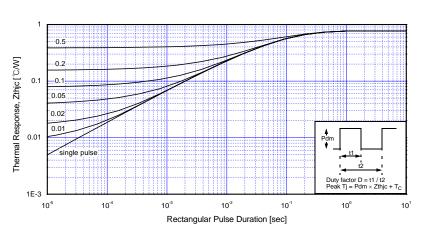


Fig 17. Transient Thermal Impedance of IGBT



Always visit Fairchild Semiconductor's online packaging area for the most recent package drawings:

http://www.fairchildsemi.com/package/packageDetails.html?id=PN_TT3P0-003

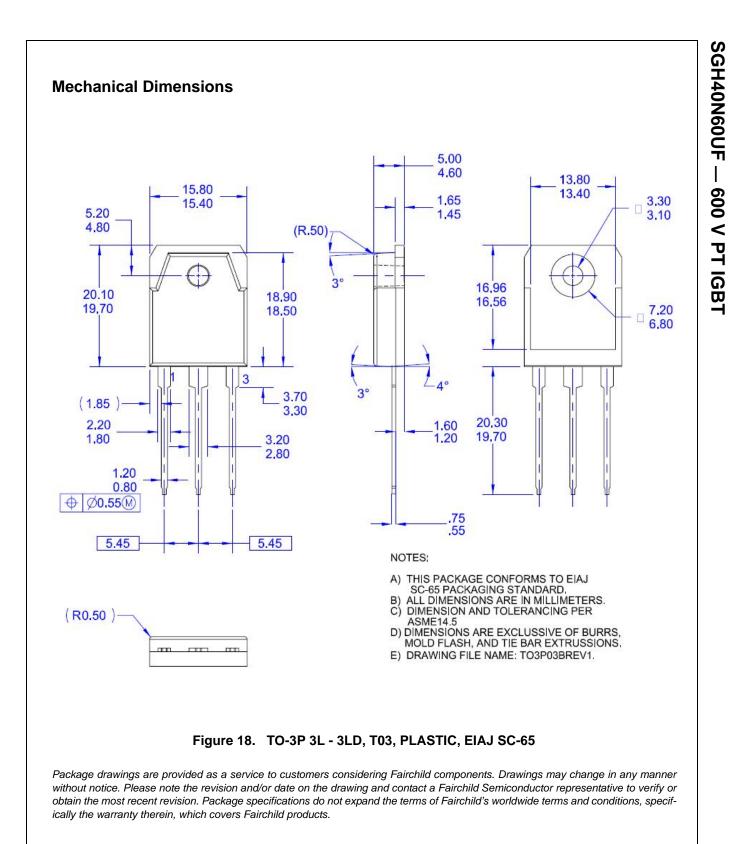

SEMICONDUCTOR

TRADEMARKS

The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidiaries, and is not intended to be an exhaustive list of all such trademarks.

®

AccuPower™ AX-CAF BitSiC™ Build it Now™ CorePLUS™ CorePOWER™ CROSSVOLT™ CTL™ Current Transfer Logic™ DEUXPEED® Dual Cool™ EcoSPARK[®] EfficentMax™ ESBC™

R Fairchild® Fairchild Semiconductor® FACT Quiet Series™ FACT® FAST® FastvCore™ FETBench™ FPS™

F-PFS™ FRFET® Global Power ResourceSM GreenBridge™ Green FPS™ Green FPS™ e-Series™ G*max*™ GTO™ IntelliMAX™ **ISOPLANAR™** Marking Small Speakers Sound Louder and Better™ MegaBuck™ MICROCOUPLER™ MicroFET[™] MicroPak™ MicroPak2™ MillerDrive™ MotionMax[™] mWSaver[®] OptoHiT™ **OPTOLOGIC[®] OPTOPLANAR[®]**

PowerTrench[®] PowerXS™ Programmable Active Droop™ **QFĔT**® QS™ Quiet Series™ RapidConfigure™ тм Saving our world, 1mW/W/kW at a time™ SignalWise™ SmartMax™ SMART START™ Solutions for Your Success™ SPM[®] STEALTH™ SuperFET[®] SuperSOT™-3 SuperSOT™-6 SuperSOT™-8 SupreMOS® SyncFET™

Sync-Lock™ **GENERAL** ^{®'} TinyBoost TinyBuck[®] TinyCalc™ TinyLogic® TINYOPTO™ TinyPower™ TinyPWM™ TinyWire™ TranSiC™ TriFault Detect™ TRUECURRENT®* µSerDes™ $\mu_{_{
m Ser}}$ UHC® Ultra FRFET™

UniFET™ VCX™ VisualMax™ VoltagePlus™ XS™

*Trademarks of System General Corporation, used under license by Fairchild Semiconductor.

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

LIFE SUPPORT POLICY FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used here in:

- Life support devices or systems are devices or systems which, (a) are 1. intended for surgical implant into the body or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
- A critical component in any component of a life support, device, or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness

ANTI-COUNTERFEITING POLICY

Fairchild Semiconductor Corporation's Anti-Counterfeiting Policy. Fairchild's Anti-Counterfeiting Policy is also stated on our external website, www.Fairchildsemi.com, under Sales Support. Counterfeiting of semiconductor parts is a growing problem in the industry. All manufactures of semiconductor products are experiencing counterfeiting of their

parts. Customers who inadvertently purchase counterfeit parts experience many problems such as loss of brand reputation, substandard performance, failed application, and increased cost of production and manufacturing delays. Fairchild is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. Fairchild strongly encourages customers to purchase Fairchild parts either directly from Fairchild or from Authorized Fairchild Distributors who are listed by country on our web page cited above. Products customers buy either from Fairchild directly or from Authorized Fairchild Distributors are genuine parts, have full traceability, meet Fairchild's quality standards for handing and storage and provide access to Fairchild's full range of up-to-date technical and product information. Fairchild and our Authorized Distributors will stand behind all warranties and will appropriately address and warranty issues that may arise. Fairchild will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. Fairchild is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

PRODUCT STATUS DEFINITIONS Definition of Terms

Datasheet Identification	Product Status	Definition
Advance Information	Formative / In Design	Datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	Datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time withou notice to improve design.
No Identification Needed	Full Production	Datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve the design.
Obsolete	Not In Production	Datasheet contains specifications on a product that is discontinued by Fairchild Semiconductor. The datasheet is for reference information only.

ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <u>www.onsemi.com/site/pdf/Patent-Marking.pdf</u>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor haves against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death a

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800–282–9855 Toll Free USA/Canada Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910

Japan Customer Focus Center Phone: 81-3-5817-1050 ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative

© Semiconductor Components Industries, LLC