

# ON Semiconductor

## Is Now

# onsemi™

To learn more about onsemi™, please visit our website at  
[www.onsemi.com](http://www.onsemi.com)

---

**onsemi** and **onsemi** and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi** product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner. Other names and brands may be claimed as the property of others.



Is Now Part of



**ON Semiconductor®**

To learn more about ON Semiconductor, please visit our website at

[www.onsemi.com](http://www.onsemi.com)

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.



# AN-5241

## Guidelines for Pb-Free Soldering of Fairchild Components Based on JEDEC® J-STD 20D / IEC EN 61760-1:2006

### Introduction

The basic concepts behind the Pb-free SMT reflow process are the same as the old industry standard Sn63Pb37 solder used for decades in the electronics industry. The proper characterization of the equipment, with consideration given to the board component loading, as well as the selection of the appropriate materials and printing process, result in a reliable, high-yield, low-rework assembly run. Similarly, proper characterization of the Pb-free wave-solder process results in consistent wetting of the terminals and through-holes with no damage to surface mounted components on the same board. This application note presents Fairchild's recommendation for a starting point for SMT and wave solder profiles; however, it is critical to recognize that a soldering profile that works for one board and material set likely differs from other production runs if the material or board design is different.

### Solder Profile Basics

The placement of the thermocouples is critical for an accurate solder profile. Industry experts, such as Jabil Circuit1, recommend a review of the leaded components on the board to establish the hot spots, such as the package body, and cold spots, such as the terminal (where it sits on the land pattern). For array packages, such as WLCSP and BGA, it is a little more challenging, but very important; especially with large array packages. The top of the body is selected and, for the terminals, the recommendation is to drill a hole in the middle of the center ball and one of the perimeter balls to insert the thermocouples. Generally, selection of the largest components is desired for the thermocouples as they are slowest to reflow due to their thermal mass. The smallest packages and edges of the printed circuit board (PCB) should also be considered, as these heat quickly and could be overstressed if exposed to extended heating. Fairchild strongly suggests that customers review recommendations in JEDEC® JEP140 for thermocouple use.

### Package Peak Temperature

JEDEC® J-STD 020D recommends that the target peak package temperature for Moisture Sensitivity Level (MSL) assessment be selected based on package volume and thickness. J-STD 020D is "...not meant to specify board assembly profiles;"<sup>[2]</sup> however, to prevent component damage, actual SMT profiles should not exceed the parameters J-STD 020D Table 5-2, reproduced below:

**Table 1. J-STD 020D Table 5-2**

Thickness (mm)	Volume (mm <sup>3</sup> )		
	<350	350-2000	>2000
<1.6	260c	260c	260c
1.6-2.5	260c	250c	245c
>2.5	245c	245c	245c

**Note:**

1. All Fairchild packages are rated for Pb-free solder using JEDEC® J-STD 020D MSL classification specification solder profile and are backward compatible with conventional Sn63Pb37 solder. Packages receiving an MSL rating greater than one may need to be baked before assembly, depending on storage conditions (see *product packaging for recommendations / requirements*).

### The Reflow Process<sup>[3]</sup>

Refer to Figure 1 for an illustration of a typical Pb-free Surface Mount (SMT) reflow profile.

In the reflow process, each of the process zones is critical for good performance.

The preheat zone's purpose is to evaporate any solvents in the solder paste or in the construction of the board. A ramp rate of three degrees centigrade per second (3°C/s) is the maximum recommendation to avoid splattering, bridging of solder fillets, slump, or solder-ball creation. Careful control of the ramp rate also helps avoid thermal shock stress of the components and the PCB.

In the soak zone, flux components are activated and the reduction of oxides on both terminals and board pads begins. The soak is important where there is a wide mix of component sizes (and mass) as they are all brought up in temperature in preparation for soldering.

The third process area is the reflow zone, in which the solder spheres in the solder begin to melt together, forming the solid mass needed to provide the strength in the bond between the component and the board.

The final step is the cool-down ramp rate. At this point, the board and components are brought back to room temperature at a controlled rate so no solder intermetallics that can weaken the bond form. The cool-down ramp rate affects the grain structure in the solder joint, which affects board-level reliability; in particular, drop test performance, where finer structure results in better results. Faster cool-down ramp rates result in finer grain structures.

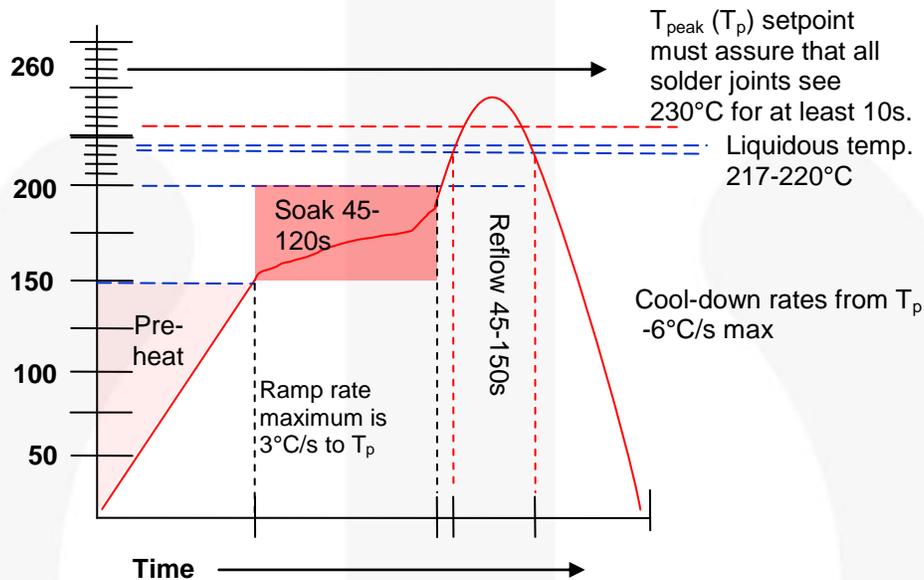


Figure 1. Pb-free Surface Mount (SMT) Reflow Process

# Solder Reflow Profile Examples

Examples of Pb-free solder reflow profiles for various Fairchild Semiconductor SMT packages, showing that there is no single universal solder profile that can be used for all packages and boards.

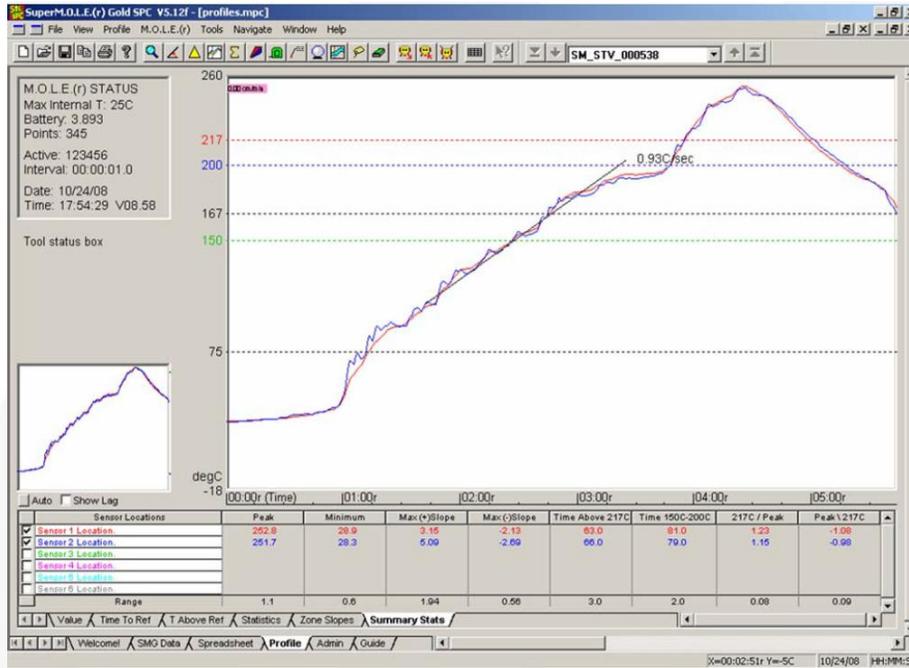


Figure 2. Fairchild-Derived Reflow Profile for WLCSP Using SAC305 Solder Paste

**Note:**

- 2. The time above 217°C is 63-66 seconds, depending on which thermocouple is viewed.

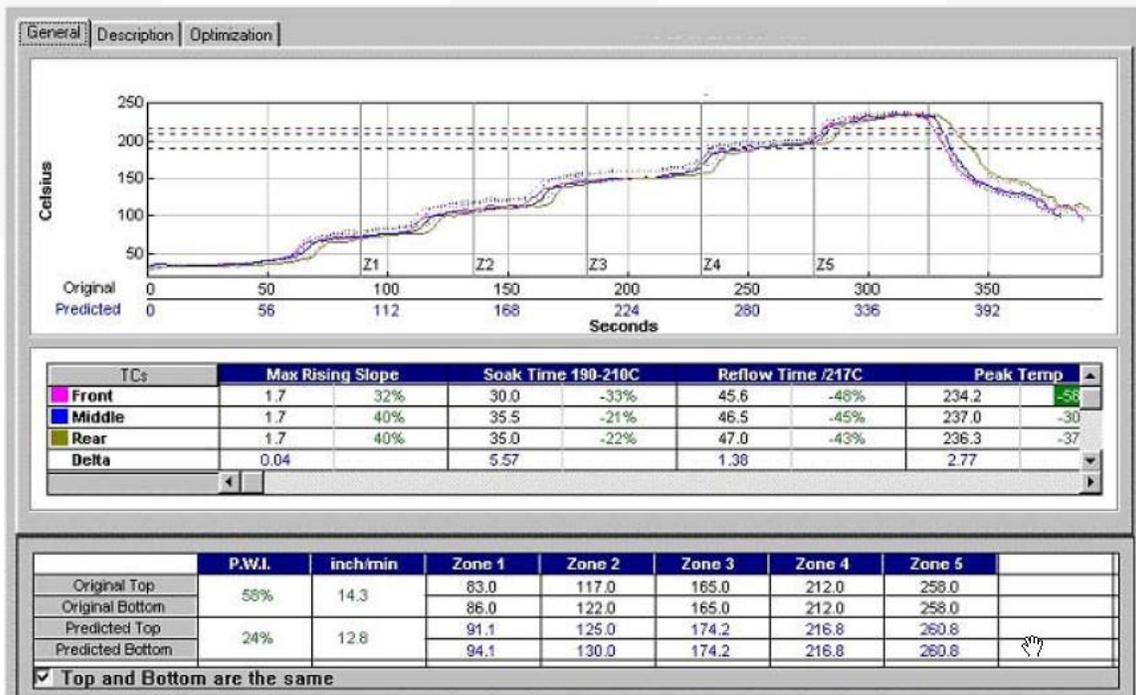


Figure 3. Fairchild-Derived Profile for 8x8 Multi-DAP QFN (MLP) Using SAC305 Solder Paste

**Note:**

- 3. The time above 217°C for this much-larger package is only 45-47 seconds. The difference is the PCB has a low density array of this package type, so thermal load is lower than the example in Figure 2 above.

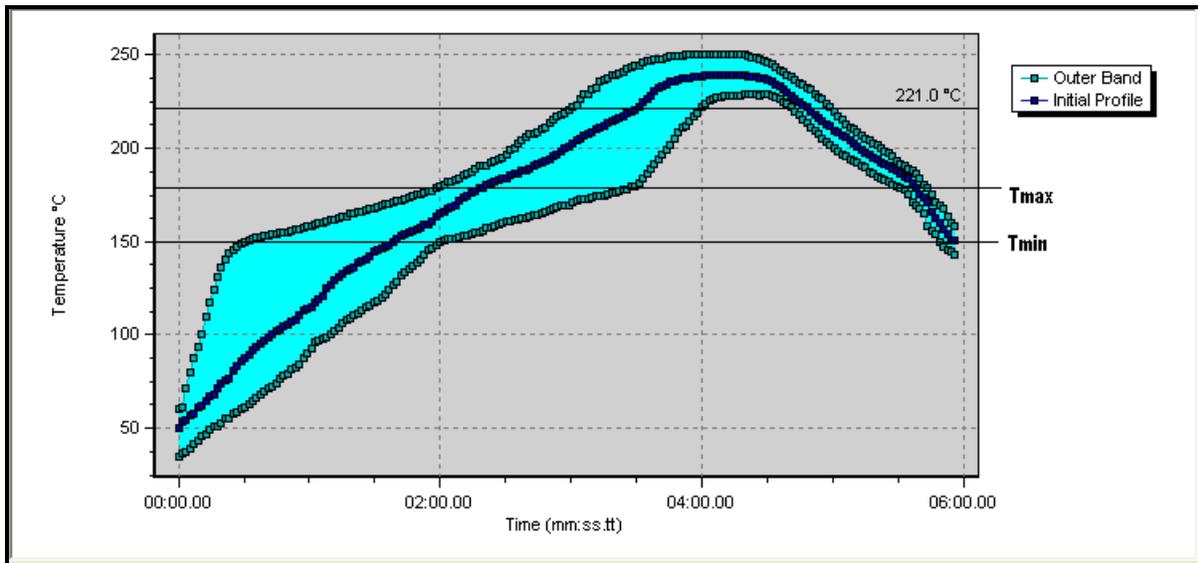


Figure 4. Fairchild-Derived Profile for .35 mm Pitch UDQFN Using SAC305 Solder Paste

**Note:**

- The tiny UDQFN was assembled on a high-density board that featured a mix of packages and included a large number of 0603- and 0204-sized passive components as well as a 144ld TQFP package. The reflow time is around 60-70 seconds.

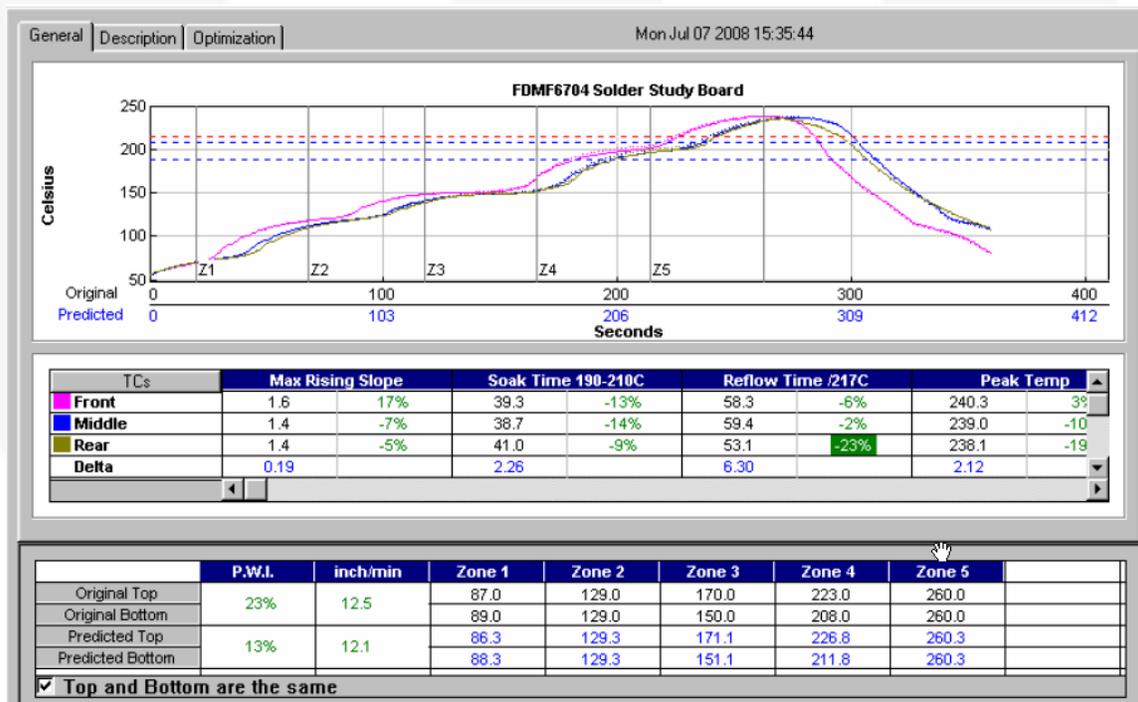


Figure 5. Fairchild-Derived Profile for 6x6 Multi-DAP QFN (MLP) Using SAC 305 Solder Paste.

**Note:**

- The difference in this profile compared to the one for the 8 x 8 version of the same package technology in Figure 3. The reflow time in Figure 5 is 53-59 seconds compared to 45-47 seconds for the bigger package in Figure 3.

## Solder Profile for Pb-Free Dual-Wave Soldering Process

To achieve good results with lead-free wave solder process, the condition of the solder must be considered, with analysis recommended every 5000 boards. The process should be carefully optimized as lead-free solders are slower to wet compared to traditional SnPb solder. Contact time, conveyor speed, and width are critical parameters for lead-free.

For ramp temperatures, the delta should be no more than 200°C/s with preheat heating rate of between 1 and 4°C/s, with 2°C/s typical. The target of the final preheat stage should be to bring the board to within 125°C of the soldering temperature. The maximum time across both waves should be limited to 10 seconds. The cool-down ramp should be 5°C/s maximum. 260°C is the maximum temperature and should not be exceeded.

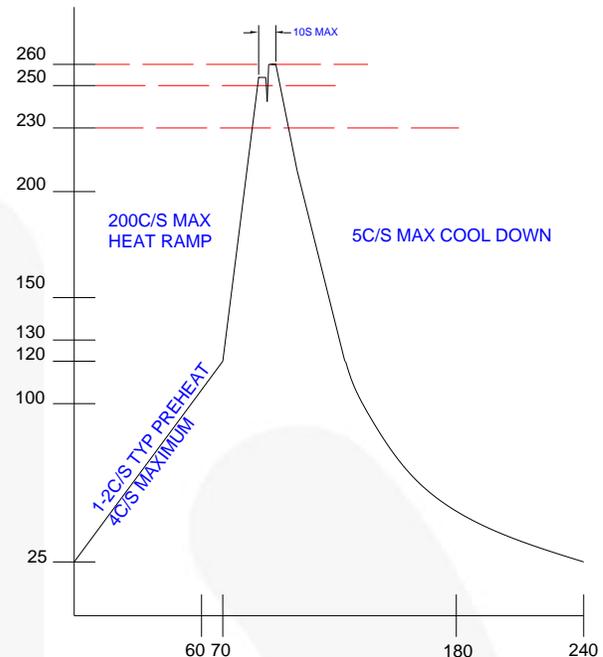


Figure 6. Lead-Free Dual-Wave Process  
(refer to EN 61760-1:2006)

## References

- [1] "Lead-Free Reflow Profile Study" presented at IPC-JEDEC® 4<sup>th</sup> International Conference on Lead-free Electronic Components and Assemblies. Nabel Ghalib & Guyen Chu, Jabil Circuit, Inc. and Girish S. Wable, State University of New York, Binghamton.
- [2] JEDEC® J-STD20D, Note 2, Table 5-2, Classification Reflow Profiles, page 7.
- [3] David Scheiner, Kester Solder, "Solder Materials," SMT Magazine, July, 1998.

### DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

ON Semiconductor and  are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## PUBLICATION ORDERING INFORMATION

### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor  
19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA  
**Phone:** 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
**Fax:** 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
**Email:** [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

**N. American Technical Support:** 800-282-9855 Toll Free  
USA/Canada  
**Europe, Middle East and Africa Technical Support:**  
Phone: 421 33 790 2910  
**Japan Customer Focus Center**  
Phone: 81-3-5817-1050

**ON Semiconductor Website:** [www.onsemi.com](http://www.onsemi.com)  
**Order Literature:** <http://www.onsemi.com/orderlit>  
For additional information, please contact your local  
Sales Representative