

Product Overview

LC898124EP3XC: Optical Image Stabilization (OIS) / Open-Auto Focus (AF) Controller & Driver integrating an on-chip 32-bit DSP

For complete documentation, see the data sheet.

LC898124EP3XC is a system LSI integrating an onchip 32-bit DSP, an EEPROM and peripherals including analog circuits for OIS (Optical Image Stabilization) / Open- AF (Auto Focus) control and constant current drivers.

Features

- On-chip 32-bit DSP
 - Built-in software for digital servo filter
 - Built-in software for Gyro filter
- Memory
 - EEPROM
 - ROM
 - SRAM
- Package
 - WLCSP27 (3.89 mm x 1.30 mm), thickness Max. 0.33 mm, with back coat
 - Pb-Free and Halogen Free compliance
- Peripherals
 - AD converter : Input 4-ch
 - DA converter : Output 2-ch
 - 2-wire Serial I/F circuit (with clock stretch function)
 - Hall Bias circuit x2-ch
 - Hall Amp x2-ch
 - OSC (Oscillator)
 - LDO (Low Drop-Out regulator)
 - Digital Gyro I/F for various types of gyro (SPI Bus)
 - Interrupt I/F
- Driver
 - OIS : Constant current linear driver (x2-ch, Ifull = 200 mA)
 - OP-AF (bidirection) : Constant current linear driver (x1-ch, Ifull = 130 mA)
- Power Supply Voltage
 - AD / DA / VGA / LDO / OSC : AVDD30 = 2.6 V to 3.3 V
 - Driver : VM = 1.8 V to 3.3 V
 - 1.8 V I/O : IOVDD = 1.7 V to 3.3 V
 - Core Logic : Generated by on-chip LDO DVDD15 = typ. 1.59 V

Benefits

- The onchip DSP allows the OIS algorithm to be flexible and achieve the high OIS performance. Command decoder can be implemented, which is demanded mainly by China customers.
- The Onchip EEPROM allows to store the calibration data and DSP program.
- Small chip size (1.3 x3.89 x0.33 mm)

Applications

- OIS / AF Camera Module


End Products

- Smart Phones
- Tablets

Part Electrical Specifications

Product	Compliance	Status	Phase	V _M Min (V)	V _M Max (V)	V _{CC} Min (V)	V _{CC} Max (V)	I _O Max (A)	I _O Peak Max (A)	Control Type	Package Type
LC898124EP3XC-MH	Pb-free Halide free	Active		1.8	3.3	2.6/1.7	3.3	0.21/0.136 5		Serial	WLCSP-27

Application Diagram

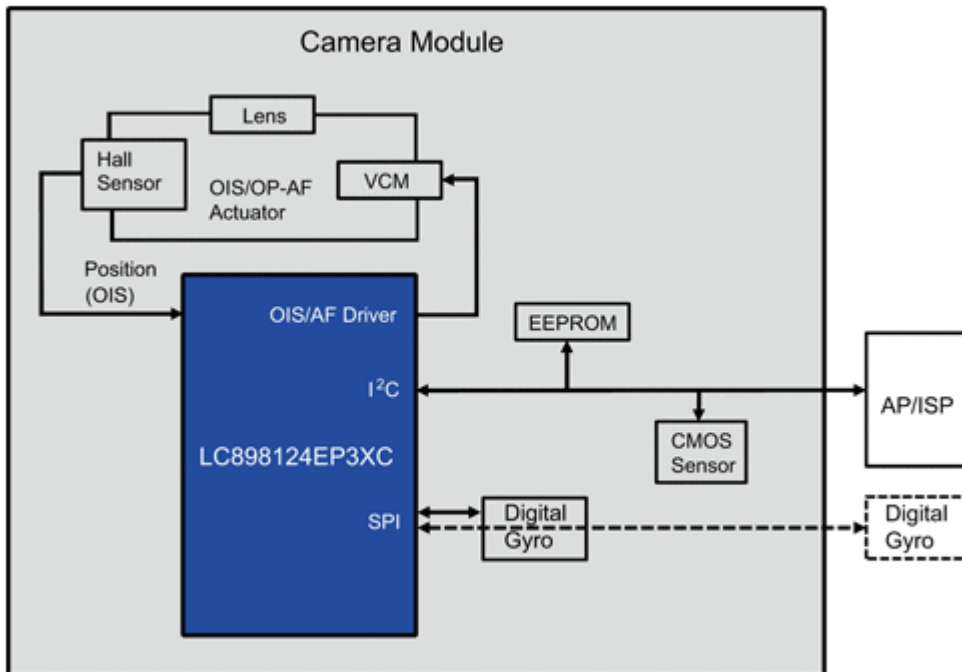

For more information please contact your local sales support at www.onsemi.com.

Created on: 10/22/2018