ON Semiconductor

Is Now



To learn more about onsemi™, please visit our website at www.onsemi.com

onsemi and ONSEMI. and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. onsemi reserves the right to make changes at any time to any products or information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/ or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use onsemi products for any such unintended or unauthorized application,




KSH42C

ON Semiconductor®

General Purpose Amplifier Low Speed Switching Applications

- Lead Formed for Surface Mount Application (No Suffix)
- Straight Lead (I-PAK, "- I" Suffix)
- Electrically Similar to Popular TIP42C



1.Base 2.Collector 3.Emitter

PNP Epitaxial Silicon Transistor

Absolute Maximum Ratings T_C=25°C unless otherwise noted

| Symbol | Parameter | Value | Units |
|------------------|--|------------|-------|
| V _{CBO} | Collector-Base Voltage | -100 | V |
| V _{CEO} | Collector-Emitter Voltage | -100 | V |
| V _{EBO} | Emitter-Base Voltage | -5 | V |
| I _C | Collector Current (DC) | -6 | Α |
| I _{CP} | Collector Current (Pulse) | -10 | Α |
| I _B | Base Current | -2 | Α |
| P _C | Collector Dissipation (T _C =25°C) | 20 | W |
| | Collector Dissipation (T _a =25°C) | 1.75 | W |
| TJ | Junction Temperature | 150 | °C |
| T _{STG} | Storage Temperature | - 65 ~ 150 | °C |

Electrical Characteristics T_C=25°C unless otherwise noted

| Symbol | Parameter | Test Condition | Min. | Max. | Units |
|------------------------|--|-----------------------------------|------|------|-------|
| V _{CEO} (sus) | * Collector-Emitter Sustaining Voltage | $I_C = -30 \text{mA}, I_B = 0$ | -100 | | V |
| I _{CEO} | Collector Cut-off Current | $V_{CE} = -60V, I_{B} = 0$ | | -50 | μΑ |
| I _{CES} | Collector Cut-off Current | $V_{CE} = -100V, V_{BE} = 0$ | | -10 | μΑ |
| I _{EBO} | Emitter Cut-off Current | $V_{BE} = -5V, I_{C} = 0$ | | -0.5 | mA |
| h _{FE} | * DC Current Gain | $V_{CE} = -4V, I_{C} = -0.3A$ | 30 | | |
| | | $V_{CE} = -4V$, $I_{C} = -3A$ | 15 | 75 | |
| V _{CE} (sat) | * Collector-Emitter Saturation Voltage | $I_C = -6A, I_B = -600 \text{mA}$ | | -1.5 | V |
| V _{BE} (on) | * Base-Emitter On Voltage | $V_{CE} = -6A, I_{C} = -4A$ | | -2 | V |
| f _T | Current Gain Bandwidth Product | $V_{CE} = -10V, I_{C} = -500mA$ | 3 | | MHz |

^{*} Pulse Test: PW≤300μs, Duty Cycle≤2%

Typical Characteristics




Figure 1. DC current Gain




Figure 2. Base-Emitter Saturation Voltage Collector-Emitter Saturation Voltage




Figure 3. Collector Capacitance




Figure 4. Turn On Time




Figure 5. Turn Off Time




Figure 6. Safe Operating Area

Typical Characteristics (Continued)





Figure 7. Power Derating

Package Dimensions


D-PAK

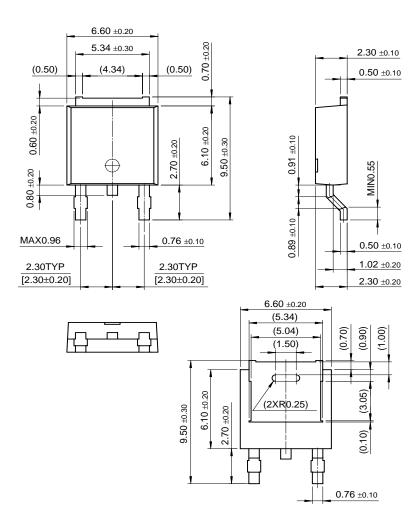



Dimensions in Millimeters

Package Dimensions (Continued)

I-PAK

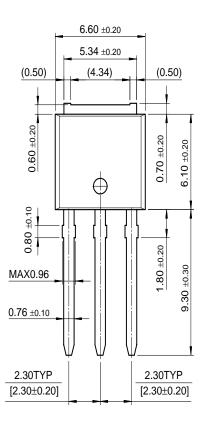





Dimensions in Millimeters

ON Semiconductor and in are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hol

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800-282-9855 Toll Free USA/Canada Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910

Phone: 421 33 790 2910

Japan Customer Focus Center
Phone: 81–3–5817–1050

ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative