

NCP2824FCT2GEVB

NCP2824FCT2 Evaluation Board User's Manual



ON Semiconductor®

<http://onsemi.com>

EVAL BOARD USER'S MANUAL

Overview

The NCP2824 is a Filterless Class D amplifier capable of delivering up to 2.4 W to a 4 Ω load with a 5 V supply voltage. With the same battery voltage, it can deliver 1.2 W to an 8 Ω load with less than 1% THD+N. The Non-clipping function adjusts automatically the output voltage in order to control the distortion when an excessive input is applied to the amplifier. This adjustment is done thanks to an Automatic Gain Control circuitry (AGC) built-in the chip. A simple Single wire interface allows to enable/disable the

non Clipping function and also to configure the maximum distortion level in the output. A programmable power limit function is also embedded in order to protect speakers from damage caused by an excessive sound level.

The intent of the evaluation boards is to illustrate typical operation of the NCP2824 device for laboratory characterization. The NCP2824FCT2GEVB schematic is depicted in Figure 2.


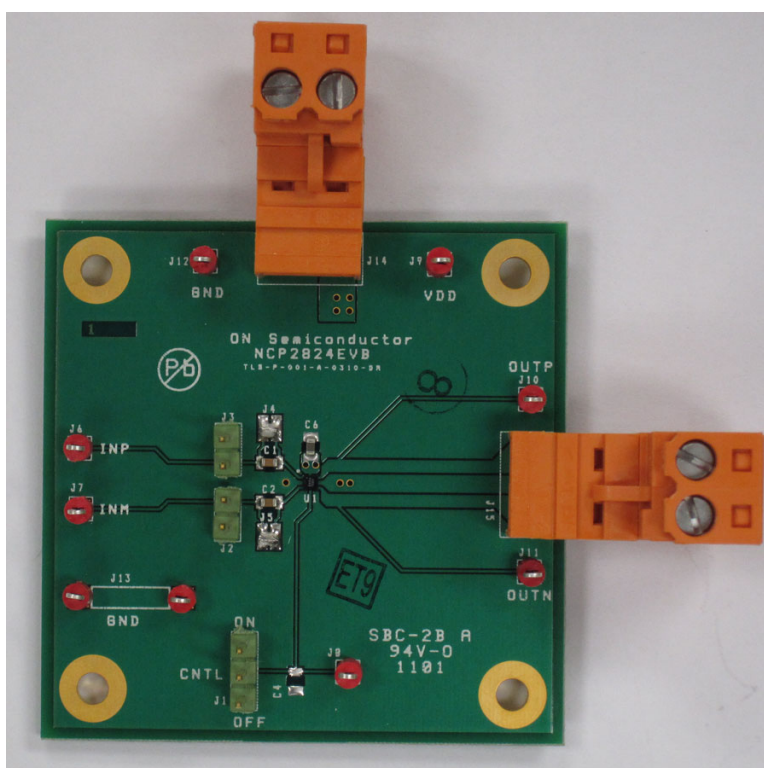


Figure 1. NCP2824FCT2GEVB Board Picture

NCP2824FCT2GEVB

BOARD SCHEMATIC

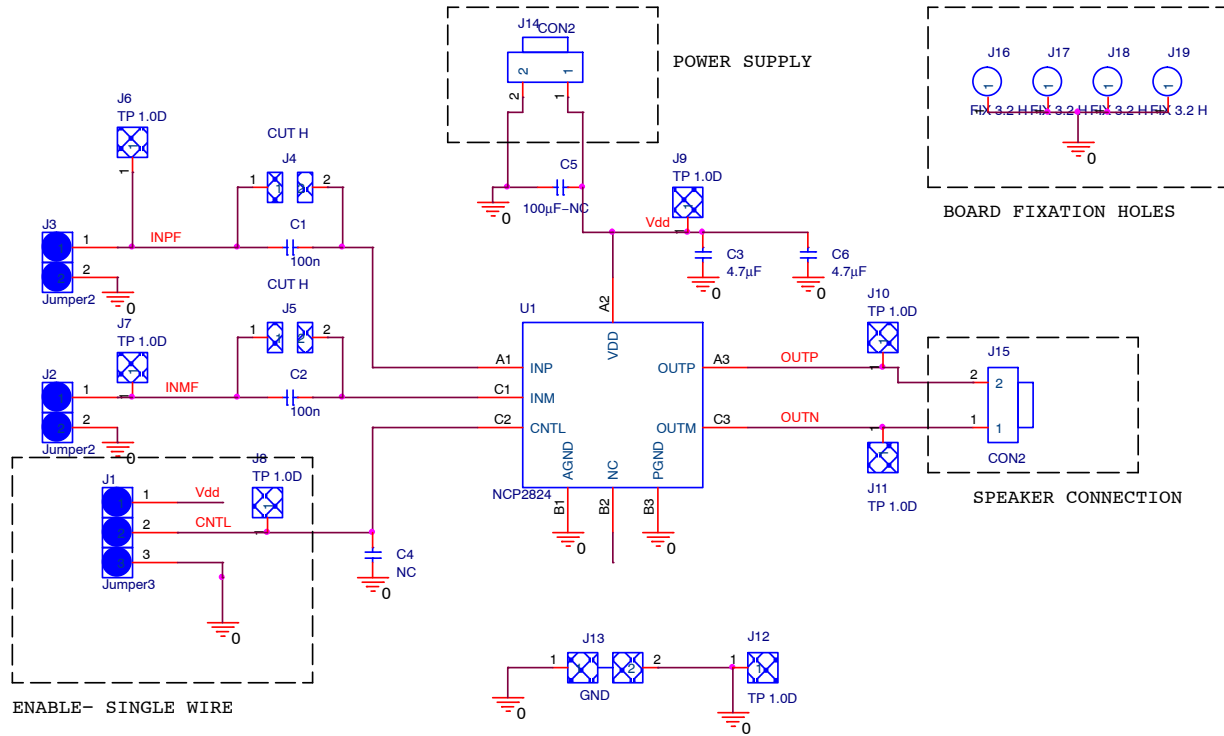

Title		
NCP2824 EVB		
Size	Document Number	Rev
Custom	NCP2824 EVB TLS-P-001-A-0310-DR	
Date:	Sheet	1 of 1

Figure 2. NCP2824FCT2GEVB Evaluation Board Schematic

NCP2824FCT2GEVB

OPERATION

The operating power supply of the NCP2824 is from 2.5 to 5.5 V. The absolute maximum input voltage is 7.0 V. A power supply set to 3.6 V and current limit set to at least 1.5 A must be connected to J14 connector to powering the NCP2824EVB/D. Also to compensate for parasitic inductance of wires between the power supply and the evaluation board it is highly recommended to connect a 470 mF electrolytic capacitor to bypass J14 terminal. Like this the device can be evaluated under powering condition very similar that battery power supplies.

Performances of EVB Solution

To be as close as possible with final handset application, the design of this power conversion solution used small size footprints where possible. Changing components may positively or negatively impact the evaluation board performance illustrated in Figure 3 to 8. For more information please refer to the NCP2824 datasheet.

Single Wire Interface Operation

The single wire interface allows changing the default configuration of the NCP2824.

After Wake up, the NCP2824 is configured with:

- AGC enable
- Non Clip + Power limit
- Gain = 18 dB
- THD max = 1%

The following table described all the NCP2824 configurations.

Table 1. NCP2824 CONFIGURATION

Pulse Counting	Register	Description
01	AGC	AGC disable
02		AGC Enable
03	Reset	Reset configuration
04	Gain Control	Gain = 12 dB
05		Gain = 18 dB
06	THD Control	1%
07		2%
08		4%
09		6%
10		8%
11		10%
12		15%
13		20%
14	NC+L	Non Clip + Power limit
15	NC	Non Clip only
16	Power Limit Control	0.45 V _{Peak}
17		0.9 V _{Peak}
18		1.35 V _{Peak}
19		1.8 V _{Peak}
20		2.25 V _{Peak}
21		2.7 V _{Peak}
22		3.15 V _{Peak}
23		3.6 V _{Peak}

Single Wire commands can easily be emulated using a pulse generator configured in accordance with the Single wire specification, for more information about timings please refers to NCP2824 datasheet.

NCP2824FCT2GEVB

Table 2. BOARD CONNECTIONS

INPUT POWER

Symbol	Descriptions
J14-1	This is the positive connection for power supply. The leads (positive + ground) to the input supply should be twisted and kept as short as possible.
J14-2	This is the return connection for the power supply (Ground signal)
J13	Ground clip

AUDIO

Symbol	Descriptions
J3	Positive Audio input
J2	Negative Audio input
J15-2	Positive Audio output
J15-1	Negative Audio output

SWITCHES SETUP

Symbol	Switch Descriptions
J1	Enable
J4	Short input capacitor on positive input
J5	Short input capacitor on negative input
J2	Connect the positive audio input to Gnd
J3	Connect the negative audio input to Gnd

TEST POINT

Symbol	Switch Descriptions
J12	This test point is directly connected to the GND
J9	This test point is directly connected to the Vdd pin
J6	This test point is connected to the positive audio input
J7	This test point is connected to the negative audio input
J10	This test point is connected to the positive audio output
J11	This test point is connected to the negative audio output

NCP2824FCT2GEVB

TYPICAL OPERATING CHARACTERISTICS

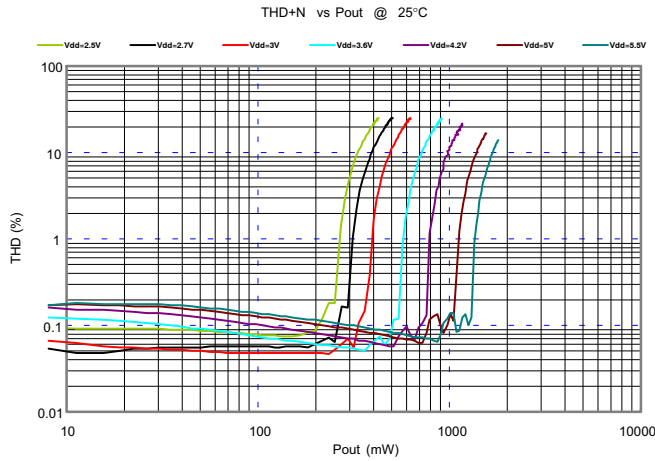


Figure 3. THD vs. P_{OUT} , $R_L = 8\ \Omega$, $f = 1\ \text{kHz}$

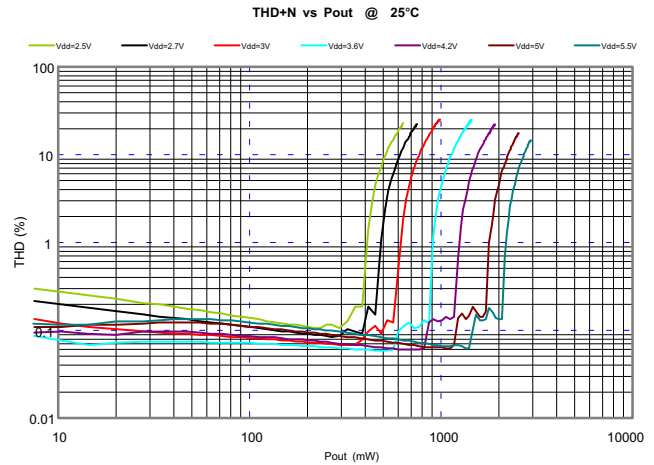


Figure 4. THD vs. P_{OUT} , $R_L = 4\ \Omega$, $f = 1\ \text{kHz}$

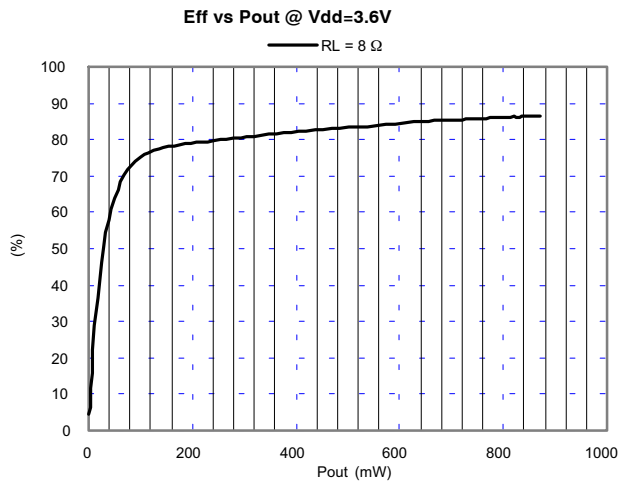


Figure 5. Efficiency vs. P_{OUT} , $R_L = 8\ \Omega$, $f = 1\ \text{kHz}$

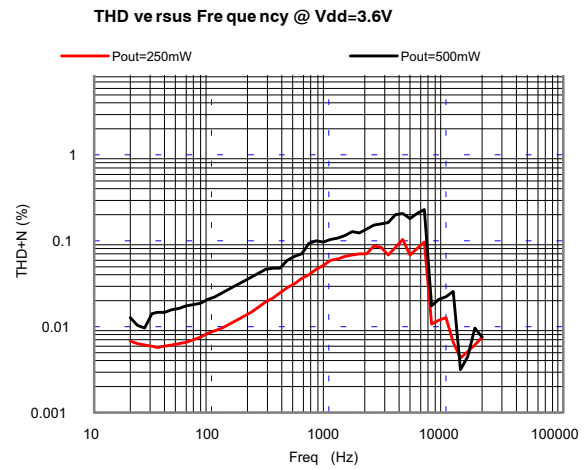


Figure 6. THD vs. Frequency, $R_L = 8\ \Omega$, $P_{OUT} = 250\ \text{mW}$

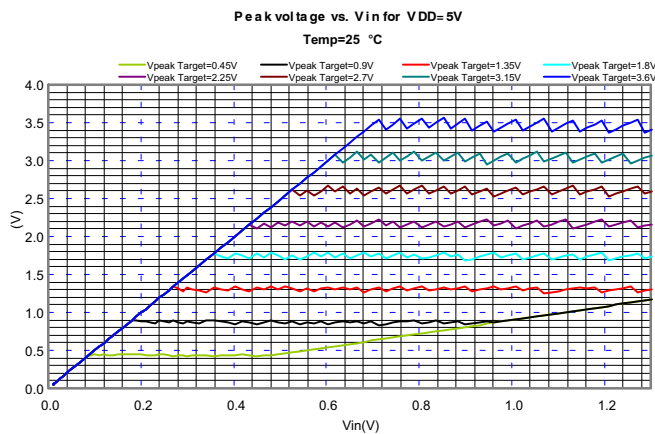


Figure 7. Peak Output Voltage in Power Limit vs. Input Voltage (rms) and Power Limit Settings, $A_v = 12\ \text{dB}$

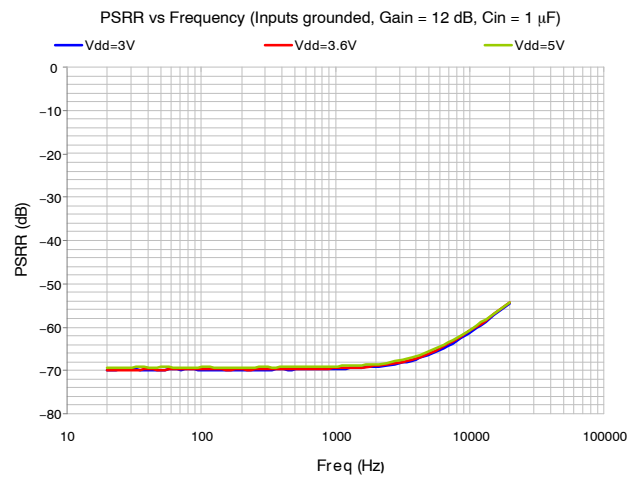


Figure 8. PSRR vs. Frequency

PCB LAYOUT

For more specific layout guidelines please refer to the NCP2824 datasheet.



NCP2824FCT2GEVB

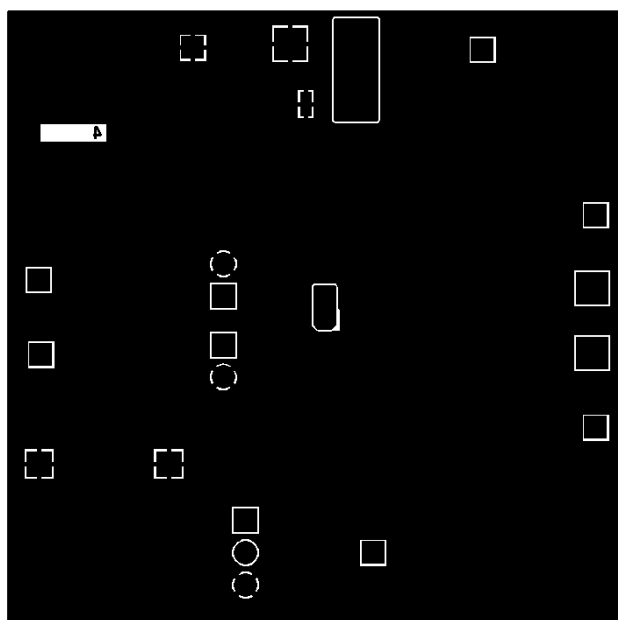


Figure 11. Bottom Layer Routing

Table 3. BILL OF MATERIALS

Qty	Ref Des.	Description	Size	Manufacturer	Part Number
1	U1	NCP2824	CSP-9 1.45 x 1.45 mm	ON Semiconductor	NCP2824
2	C1, C2	Capacitor, Ceramic 100 nF	0603	KEMET	C0603C104K5RAC
2	C3, C6	Capacitor, Ceramic 4.7 μ F 6.3 V	0603	KEMET	C0603C475K9PAC
2	J14, J15	Mal. SL5.08/2/90B plus Fem. BLZ 5.08/2		Weidmuller	SL5.08/2/90 + BLZ 5.08/2
3	J1	Header 3 pin, 100 mil spacing	0.100 x 2	Std	Std
2	J2, J3	Header 2 pin, 100 mil spacing	0.100 x 2	Std	Std
1	J6	GND Connection		Std	Std
9	J6, J7, J9, J10, J11, J12, J13	Test Point		Std	Std
2	J4, J5	Soldering point must be connected			
1	PCB	PCB 2.0 in x 2.0 in x 1.0 mm, 4 Layers		Any	TLS-P-001-A-0310-RD

NOTE: C3 is not mounted

onsemi, **onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

The evaluation board/kit (research and development board/kit) (hereinafter the "board") is not a finished product and is not available for sale to consumers. The board is only intended for research, development, demonstration and evaluation purposes and will only be used in laboratory/development areas by persons with an engineering/technical training and familiar with the risks associated with handling electrical/mechanical components, systems and subsystems. This person assumes full responsibility/liability for proper and safe handling. Any other use, resale or redistribution for any other purpose is strictly prohibited.

THE BOARD IS PROVIDED BY ONSEMI TO YOU "AS IS" AND WITHOUT ANY REPRESENTATIONS OR WARRANTIES WHATSOEVER. WITHOUT LIMITING THE FOREGOING, ONSEMI (AND ITS LICENSORS/SUPPLIERS) HEREBY DISCLAIMS ANY AND ALL REPRESENTATIONS AND WARRANTIES IN RELATION TO THE BOARD, ANY MODIFICATIONS, OR THIS AGREEMENT, WHETHER EXPRESS, IMPLIED, STATUTORY OR OTHERWISE, INCLUDING WITHOUT LIMITATION ANY AND ALL REPRESENTATIONS AND WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, TITLE, NON-INFRINGEMENT, AND THOSE ARISING FROM A COURSE OF DEALING, TRADE USAGE, TRADE CUSTOM OR TRADE PRACTICE.

onsemi reserves the right to make changes without further notice to any board.

You are responsible for determining whether the board will be suitable for your intended use or application or will achieve your intended results. Prior to using or distributing any systems that have been evaluated, designed or tested using the board, you agree to test and validate your design to confirm the functionality for your application. Any technical, applications or design information or advice, quality characterization, reliability data or other services provided by **onsemi** shall not constitute any representation or warranty by **onsemi**, and no additional obligations or liabilities shall arise from **onsemi** having provided such information or services.

onsemi products including the boards are not designed, intended, or authorized for use in life support systems, or any FDA Class 3 medical devices or medical devices with a similar or equivalent classification in a foreign jurisdiction, or any devices intended for implantation in the human body. You agree to indemnify, defend and hold harmless **onsemi**, its directors, officers, employees, representatives, agents, subsidiaries, affiliates, distributors, and assigns, against any and all liabilities, losses, costs, damages, judgments, and expenses, arising out of any claim, demand, investigation, lawsuit, regulatory action or cause of action arising out of or associated with any unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of any products and/or the board.

This evaluation board/kit does not fall within the scope of the European Union directives regarding electromagnetic compatibility, restricted substances (RoHS), recycling (WEEE), FCC, CE or UL, and may not meet the technical requirements of these or other related directives.

FCC WARNING – This evaluation board/kit is intended for use for engineering development, demonstration, or evaluation purposes only and is not considered by **onsemi** to be a finished end product fit for general consumer use. It may generate, use, or radiate radio frequency energy and has not been tested for compliance with the limits of computing devices pursuant to part 15 of FCC rules, which are designed to provide reasonable protection against radio frequency interference. Operation of this equipment may cause interference with radio communications, in which case the user shall be responsible, at its expense, to take whatever measures may be required to correct this interference.

onsemi does not convey any license under its patent rights nor the rights of others.

LIMITATIONS OF LIABILITY: **onsemi** shall not be liable for any special, consequential, incidental, indirect or punitive damages, including, but not limited to the costs of requalification, delay, loss of profits or goodwill, arising out of or in connection with the board, even if **onsemi** is advised of the possibility of such damages. In no event shall **onsemi**'s aggregate liability from any obligation arising out of or in connection with the board, under any theory of liability, exceed the purchase price paid for the board, if any.

The board is provided to you subject to the license and other terms per **onsemi**'s standard terms and conditions of sale. For more information and documentation, please visit www.onsemi.com.

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:

Technical Library: www.onsemi.com/design/resources/technical-documentation
onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at www.onsemi.com/support/sales