

# ON Semiconductor

## Is Now

# onsemi™

To learn more about onsemi™, please visit our website at  
[www.onsemi.com](http://www.onsemi.com)

---

**onsemi** and **onsemi** and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi** product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner. Other names and brands may be claimed as the property of others.

## Demonstration Note for NCV8502

### Adding Additional Current Capability to the NCV8502 (Adjustable Output Voltage Option)



ON Semiconductor®

<http://onsemi.com>

#### DEMONSTRATION NOTE

#### Description

The NCV8502A High Current Demo board highlights the procedure for increasing the output current capability of the NCV8502. This is accomplished by adding a discrete driver to the application with the adjustable version of the NCV8502. The combination of the NCV8502 and the MJD31C will supply greater than 1.0 A of current to the user programmable output voltage.

It is intended for the user to make use of the flexibility of the parts output voltage using a discrete resistor feedback divider. In this demonstration board, a potentiometer has been added to display the parts' output availability in fixed output voltages from 2.5 V to 10 V. The capability of the output voltage has an absolute maximum voltage of 20 V on the IC, and must be maintained below this level. This demo board uses a 16 V capacitor on the output limiting its use to 16 V. The NCV8502's capability extends up to 60 V, but should be avoided here to prevent damage to the capacitor.

Connection to the parts Flag/Monitor function has been made available via two external posts on the board. The intention of this function is to provide an early warning signal to the microprocessor that there is an impending reset that will occur, and the microprocessor should finish its current instruction. This comparator may also be used as a general use comparator. The positive input terminal is connected to the parts temperature stable reference (refer to the NCV8502/D data sheet for details).

This demonstration board is also a valid evaluation constituent for evaluation of the NCV8501 series of parts.

#### Features

- Automotive Grade
- User Selectable Output Voltage
- 1.0 A Capability
- Early Warning through Flag/Monitor Function



Figure 1. NCV8502A High Current Demonstration Board

## NCV8502DEMO/D

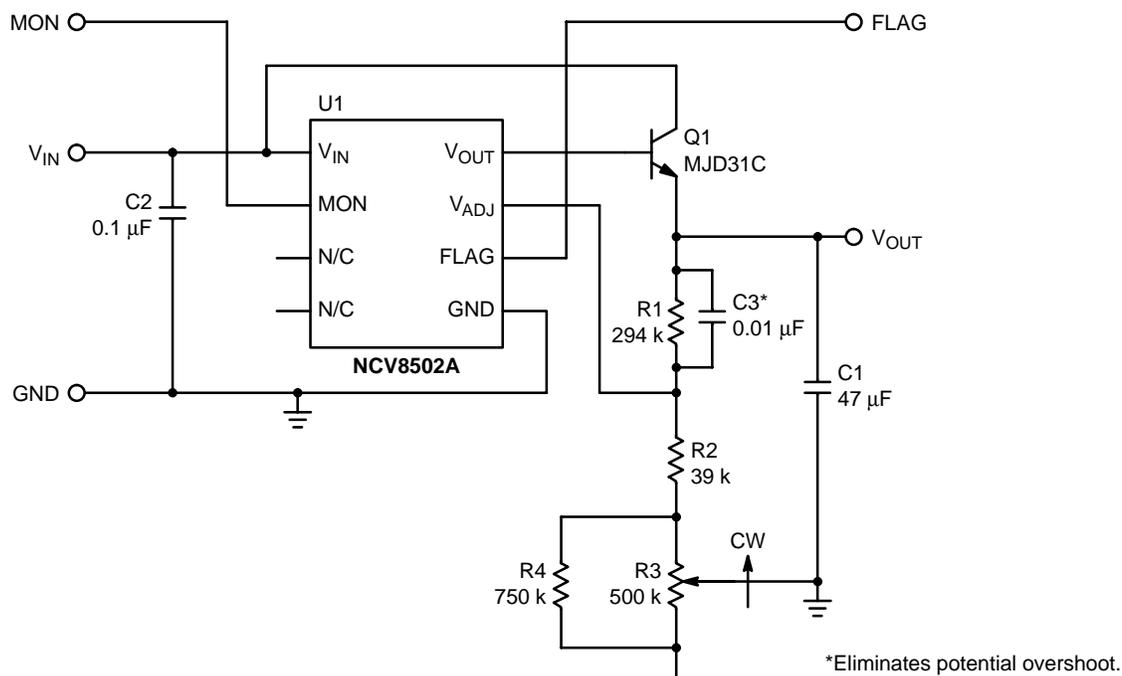


Figure 2. Demonstration Circuit Schematic

### OPERATION GUIDELINES

- There is no current limiting for the MJD31C. Do not overstress the device.
- Consider your power dissipation before running tests.
- The  $V_{ADJ}$  reference voltage is typically 1.20 V. Design your output voltage around that voltage.
- Thermal effects will affect the potentiometer at a different rate than the discrete surface mount resistors.
- The output capacitor C1 is rated at 16 V. Maintain operation below this level.
- A minimum 10 mA load is required for this board for stability considerations. Your output capacitor value may differ depending on board layout and loading. Your capacitor value may actually decrease with the removal of the trim potentiometer.
- R4 is mounted under the board across the potentiometer. Alternatively, R3 and R4 may be replaced by a single 250 k potentiometer, but doing so may not show the full range of output voltage.

### BOARD USE

Simply connect a power supply from  $V_{IN}$  to ground in addition to your load (10 mA minimum) on  $V_{OUT}$  to ground. Turning the adjustment screw of the potentiometer will move your output voltage to the voltage extremes of 2.5 V and 10 V.

Using the flag/monitor function will require a pull-up resistor on the FLAG output as it is an open collector output. Switching of the FLAG output will occur as the voltage threshold on the monitor (MON) input is crossed at about 1.20 V.

# NCV8502DEMO/D

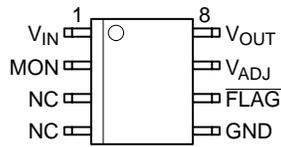


Figure 3. Pin Connections, SO-8

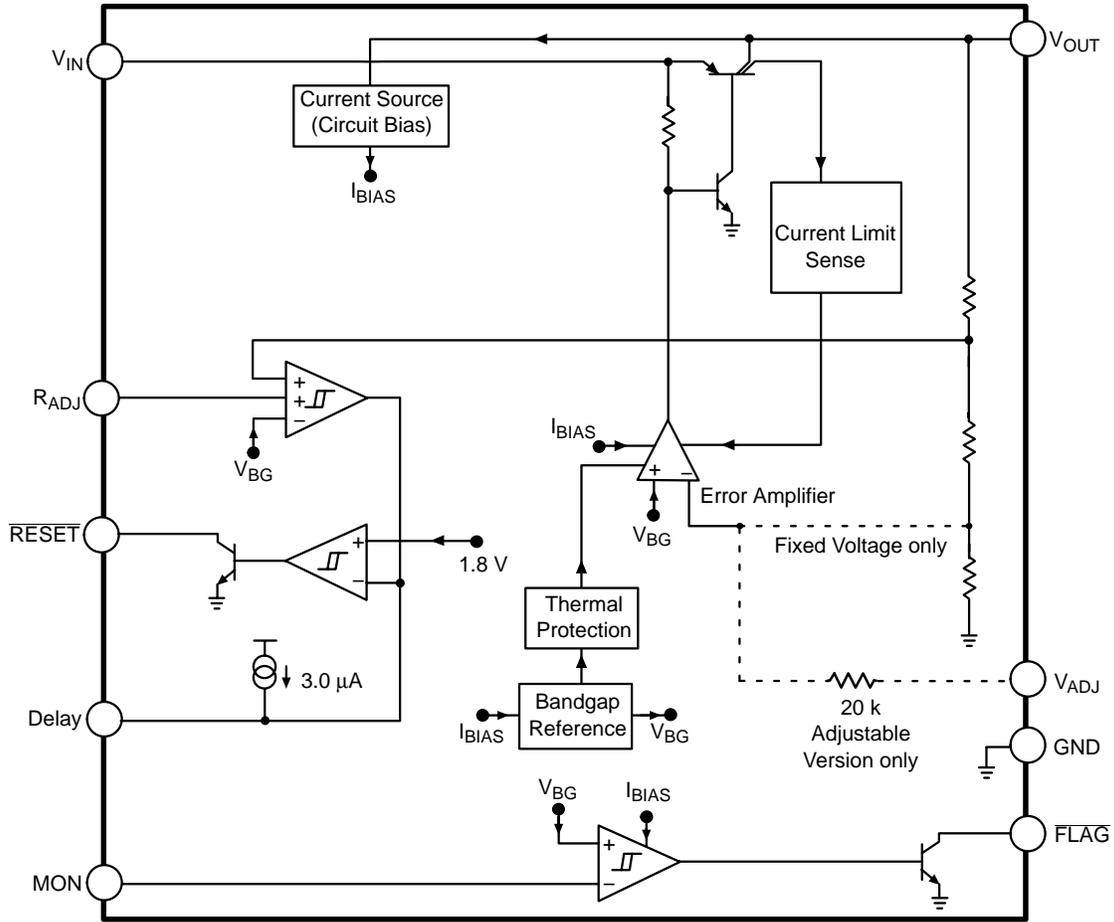


Figure 4. Block Diagram

## BILL OF MATERIALS

Item	Qty	Reference	Part	Mfg. & P/N	Distributor
1	1	C1	47 $\mu$ F, 16 V, SMT, Tantalum	Kemet	Digikey, 800-344-4539
2	1	C2	0.1 $\mu$ F, 50 V, 1206, Ceramic	Kemet	Digikey, 800-344-4539
3	1	C3	0.01 $\mu$ F, 50 V, 1206, Ceramic	Kemet	Digikey, 800-344-4539
4	1	Q1	NPN Power Transistor	ON Semiconductor, MJD31C	ON Semiconductor, 800-282-9855
5	1	R1	Resistor 1206, Surface Mount	Panasonic, 294 k, 1%	Digikey, 800-344-4539
6	1	R2	Resistor 1206, Surface Mount	Panasonic, 39 k, 1%	Digikey, 800-344-4539
7	1	R3	Resistor Potentiometer	Bournes Trimpot, 3006P-1-504	Mouser, 800-346-6873
8	1	R4	Resistor, Carbon Composition	Ohmite, 750 k, 1/4 W, 5%	Digikey, 800-344-4539
9	1	U1	150 mA Linear Regulator	ON Semiconductor, NCV8502DADJ	ON Semiconductor, 800-282-9855

# NCV8502DEMO/D

## PRINT CIRCUIT BOARD LAYOUT

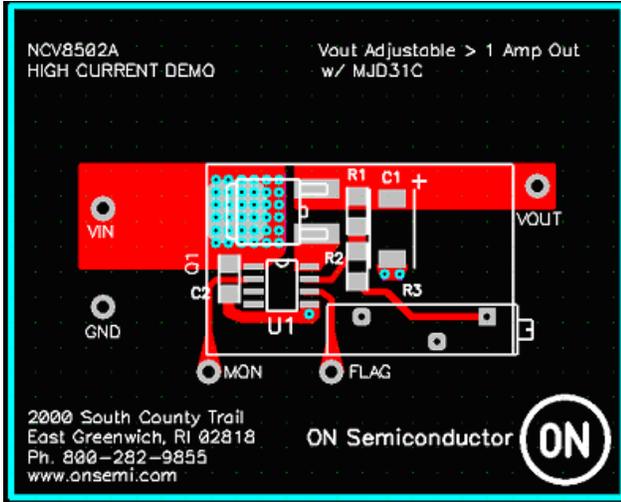


Figure 5. Top Layer and Top Silk

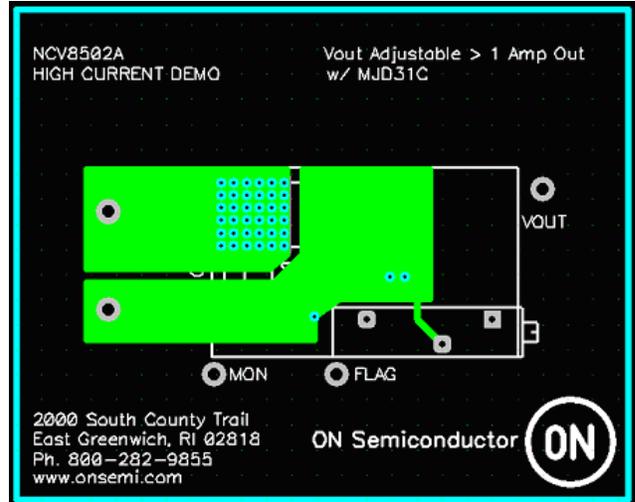


Figure 6. Bottom Layer Shown from Top Perspective with Top Silk

ON Semiconductor and  are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

### PUBLICATION ORDERING INFORMATION

#### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor  
P.O. Box 5163, Denver, Colorado 80217 USA

Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
Email: [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

N. American Technical Support: 800-282-9855 Toll Free  
USA/Canada

Japan: ON Semiconductor, Japan Customer Focus Center  
2-9-1 Kamimeguro, Meguro-ku, Tokyo, Japan 153-0051  
Phone: 81-3-5773-3850

ON Semiconductor Website: <http://onsemi.com>

Order Literature: <http://www.onsemi.com/litorder>

For additional information, please contact your  
local Sales Representative.