ONSEMI,

Bipolar Transistor

(-)50 V, (-)2 A, Low VCE(sat), (PNP)NPN Single TP/TP-FA

2SB1201/2SD1801

Features

- Adoption of FBET, MBIT Processes
- Low Collector-to-Emitter Saturation Voltage
- Small and Slim Package Making it Easy to Make 2SB1201 / 2SD1801 Used Sets Smaller
- Large Current Capacitance and Wide ASO
- These are Pb–Free Devices


Applications

• Voltage Regulators, Relay Drivers, Lamp Drivers, Electrical Equipment

ABSOLUTE MAXIMUM RATINGS (at Ta = 25°C)

Parameter	Symbol	Conditions	Ratings	Unit
Collector-to-Base Voltage	V _{CBO}		(–)60	V
Collector-to-Emitter Voltage	V _{CEO}		(–)50	V
Emitter-to-Base Voltage	V _{EBO}		(–)6	V
Collector Current	۱ _C		(–)2	А
Collector Current (Pulse)	I _{CP}		(–)4	А
Collector Dissipation	P _C		0.8	W
		Tc = 25°C	15	W
Junction Temperature	Tj		150	°C
Storage Temperature	Tstg		–55 to +150	°C


Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected. NOTE: Specifications (): 2SB1201






DPAK / TP-FA CASE 369AH

MARKING DIAGRAMS





ORDERING INFORMATION

Device	Package	Shipping [†]	
2SB1201S-E	IPAK / TP (Pb–Free)	500 pcs / Bag	
2SB1201S-TL-E	DPAK / TP-FA (Pb-Free)	700 / Tape & Reel	
2SB1201T-TL-E	DPAK / TP-FA (Pb-Free)	700 / Tape & Reel	
2SD1801S-TL-E	DPAK / TP-FA (Pb-Free)	700 / Tape & Reel	
2SD1801S-E	IPAK / TP (Pb–Free)	500 pcs / Bag	

⁺For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, <u>BRD8011/D</u>.

ELECTRICAL CHARACTERISTICS (at Ta = 25° C)

			Ratings			
Parameter	Symbol	Conditions	Min	Тур	Max	Unit
Collector Cutoff Current	I _{CBO}	V _{CB} = (–)50 V, I _E = 0 A	-	-	(–)100	nA
Emitter Cutoff Current	I _{EBO}	V _{EB} = (-)4 V, I _C = 0 A	-	-	(–)100	nA
DC Current Gain	h _{FE} 1	V _{CE} = (–)2 V, I _C = (–)100 mA	100*	-	560*	-
	h _{FE} 2	V _{CE} = (–)2 V, I _C = (–)1.5 A	40	-	-	-
Gain-Bandwidth Product	f _T	V _{CE} = (–)10 V, I _C = (–)50 mA	-	150	-	MHz
Output Capacitance	Cob	V _{CB} = (–)10 V, f = 1 MHz	-	(22)12	-	pF
Collector-to-Emitter Saturation Voltage	V _{CE} (sat)	I _C = (–)1 A, I _B = (–)50 mA	-	(-0.3)0.15	(-0.7)0.4	V
Base-to-Emitter Saturation Voltage	V _{BE} (sat)	I _C = (–)1 A, I _C = (–)50 mA	-	(–)0.9	(-)1.2	V
Collector-to-Base Breakdown Voltage	V _{(BR)CBO}	I _C = (–)10 μA, I _E = 0 A	(–)60	-	-	V
Collector-to-Emitter Breakdown Voltage	V _{(BR)CEO}	I _C = (−)1 mA, R _{BE} = ∞	(–)50	-	-	V
Emitter-to-Base Breakdown Voltage	V _{(BR)EBO}	I _E = (–)10 μA, I _C = 0 A	(–)6	-	-	V
Turn-ON Time	t _{on}	See specified Test Circuit.	-	(60)60	-	ns
Storage Time	t _{stg}		-	(450)550	-	ns
Fall Time	t _f		-	30	-	ns


Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions. NOTE: Specifications (): 2SB1201

*The 2SB1201 / 2SD1801 are classified by 100 mA $h_{\mbox{FE}}$ as follows :

Table 1.


Rank	R	S	Т	U
h _{FE}	100 to 200	140 to 280	200 to 400	280 to 560


Switching Time Test Circuit




 I_C = 10 I_{B1} = –10 I_{B2} = 500 mA, V_{CC} = 25 V (For PNP, the polarity is reversed)

Figure 1. Switching Time Test Circuit

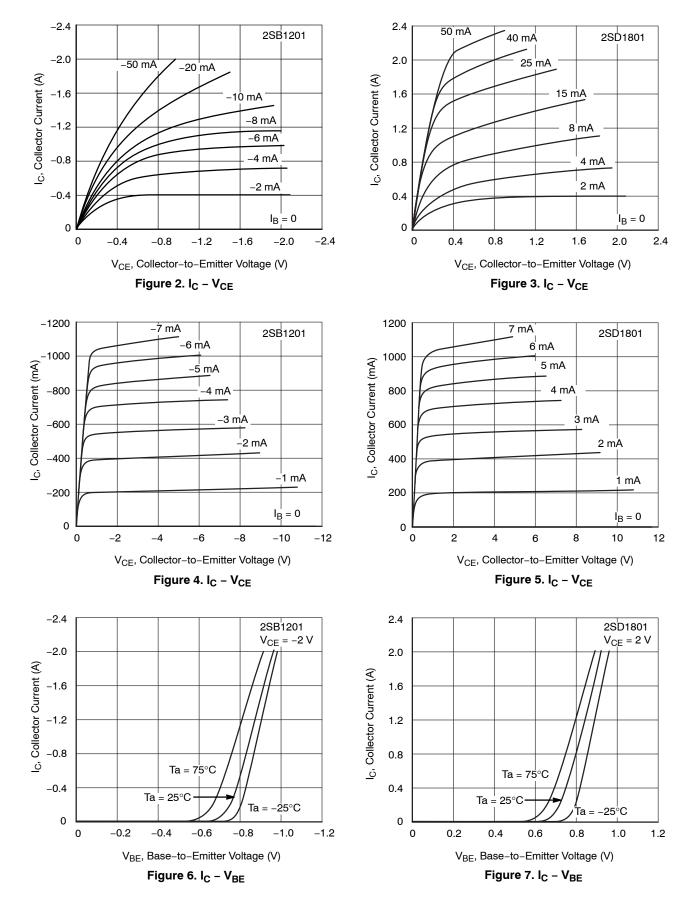

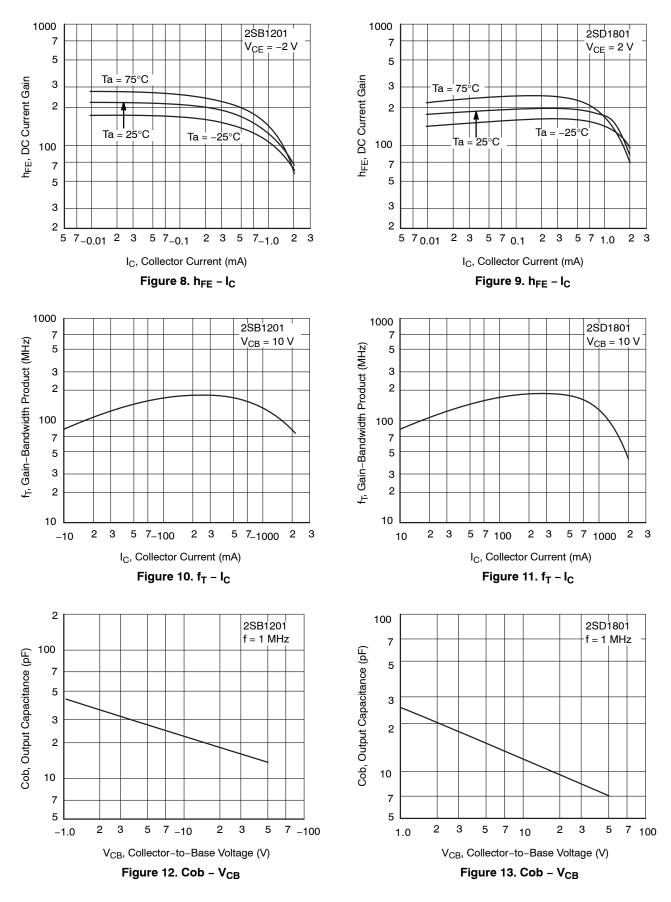


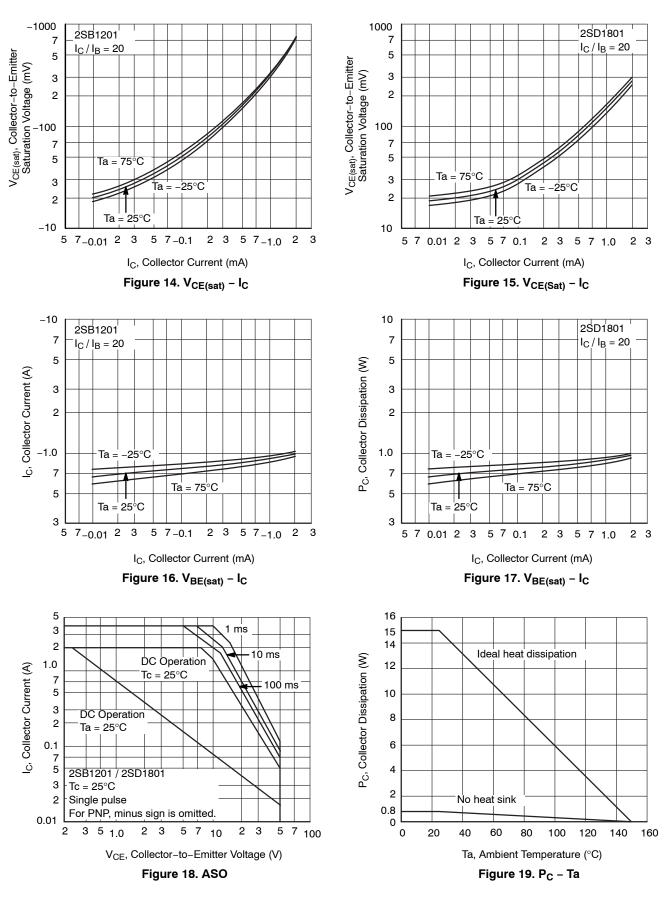



DPAK / TP-FA CASE 369AH ISSUE O

DATE 30 JAN 2012

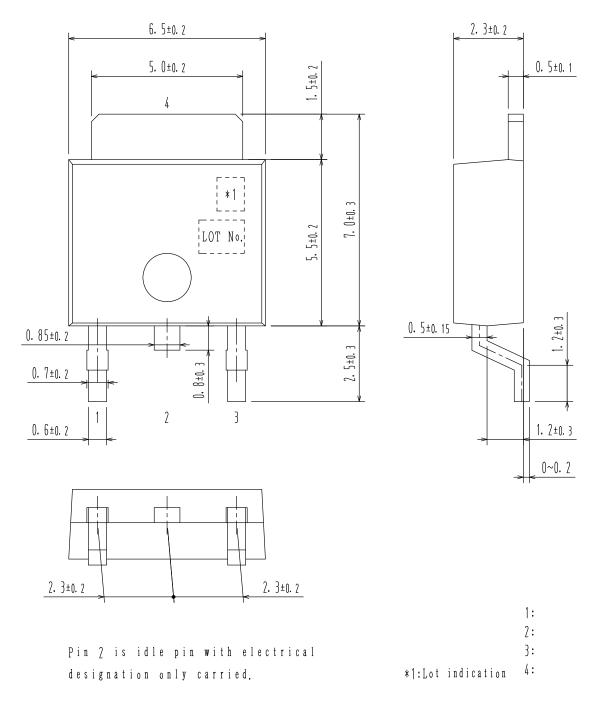

 DOCUMENT NUMBER:
 98AON66236E
 Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.


 DESCRIPTION:
 DPAK / TP-FA
 PAGE 1 OF 1


onsemi and ONSEMI are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

© Semiconductor Components Industries, LLC, 2012

onsemi

IPAK / TP CASE 369AJ ISSUE O



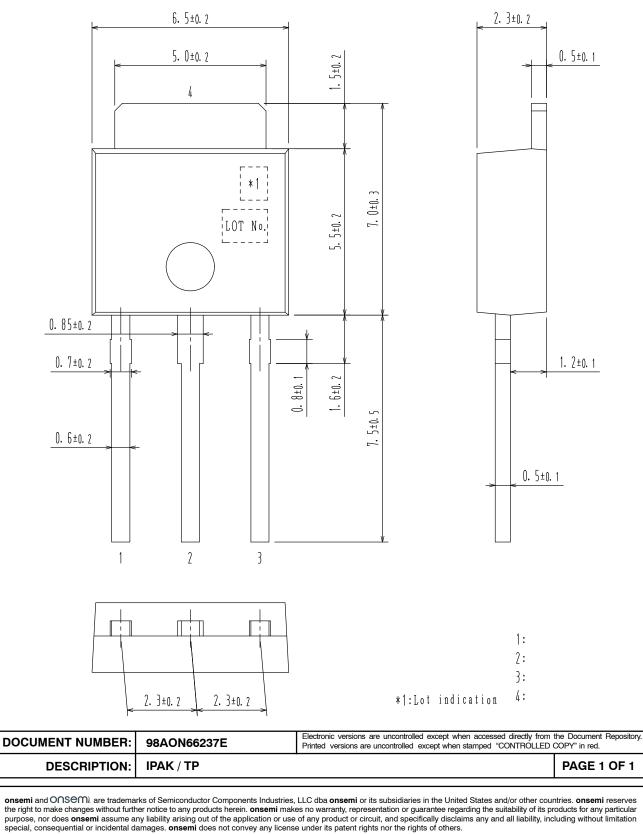

onsemi, ONSEMI, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at <u>www.onsemi.com/site/pdf/Patent_Marking.pdf</u>. onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or indental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification. Buyer shall indemnify and hold onsemi and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs,

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:

Technical Library: www.onsemi.com/design/resources/technical-documentation onsemi Website: www.onsemi.com

ONLINE SUPPORT: <u>www.onsemi.com/support</u> For additional information, please contact your local Sales Representative at <u>www.onsemi.com/support/sales</u>