

D2

DIM	MILLIMETERS				
	MIN.	NOM.	MAX.		
Α	0.70	0.75	0.80		
A1	0.00	-	0.05		
A2	0.00 - 0.05		0.05		
A3	0.20 REF				
b	0.20	0.25	0.30		
D	4.90	5.00	5.10		
D2	1.82	1.92	2.02		
D3	0.93	1.03	1.13		
D4	0.93	1.03	1.13		
D5	0.20	0.30	0.40		
D6	0.93	1.03	1.13		
D7	1.53	1.63	1.73		
D8	0.82 REF				
E	4.90	5.00	5.10		
E2	3.70	3.80	3.90		
E3	1.88	1.98	2.08		
E4	1.22	1.32	1.42		
E5	0.45	0.55	0.65		
E6	0.75	0.85	0.95		
E7	3.43	3.53	3.63		
E8	0.30	0.40	0.50		
E9	0.68 REF				
е	0.50 BSC				
e/2	0.25 BSC				
e1	0.75 BSC				
k	0.45 REF				
k1	0.40 REF				
k2	0.55 BSC				
k3	0.25 BSC				
k4	0.50 BSC				
L	0.30	0.40	0.50		
L1	0.05	0.15	0.25		
L3	0.15	0.25	0.35		
L4	0.30	0.40	0.50		

PLANE

BOTTOM VIEW
SCALE: 2:1


DOCUMENT NUMBER:	98AON13679G	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.		
DESCRIPTION:	PQFN31 5X5, 0.5P		PAGE 1 OF 2	

onsemi and ONSEMI are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.



PQFN31 5X5, 0.5P CASE 483BQ ISSUE A

DATE 06 SEP 2022

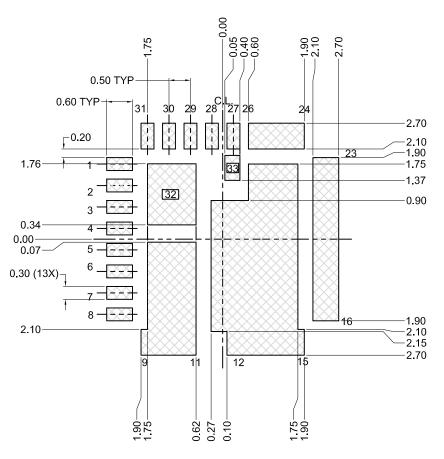

LAND PATTERN RECOMMENDATION

*FOR ADDITIONAL INFORMATION ON OUR PB-FREE STRATEGY AND SOLDERING DETAILS, PLEASE DOWNLOAD THE ON SEMICONDUCTOR SOLDERING AND MOUNTING TECHNIQUES REFERENCE MANUAL, SOLDERRM/D.

DOCUMENT NUMBER:	98AON13679G	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.	
DESCRIPTION:	PQFN31 5X5, 0.5P		PAGE 2 OF 2

onsemi and ONSEMI are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.