

MOSFET – Dual, N-Channel, Asymmetric, POWER TRENCH[®], Power Stage

FDMS3606S

General Description


This device includes two specialized N-Channel MOSFETs in a dual PQFN package. The switch node has been internally connected to enable easy placement and routing of synchronous buck converters. The control MOSFET (Q1) and synchronous SyncFET™ (Q2) have been designed to provide optimal power efficiency.

Features

- Q1: N-Channel
 - Max $r_{DS(on)}$ = 8 m Ω at V_{GS} = 10 V, I_D = 13 A
 - Max $r_{DS(on)}$ = 11 m Ω at V_{GS} = 4.5 V, I_D = 11 A
- Q2: N-Channel
 - Max $r_{DS(on)}$ = 1.9 m Ω at V_{GS} = 10 V, I_D = 27 A
 - Max $r_{DS(on)}$ = 2.8 m Ω at V_{GS} = 4.5 V, I_D = 23 A
- Low Inductance Packaging Shortens Rise/Fall Times, Resulting in Lower Switching Losses
- MOSFET Integration Enables Optimum Layout for Lower Circuit Inductance and Reduced Switch Node Ringing
- This Device is Pb-Free, Halide Free and is RoHS Compliant

Applications

- Computing
- Communications
- General Purpose Point of Load
- Notebook VCORE

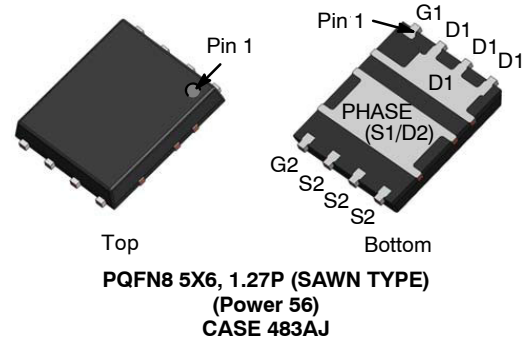


MARKING DIAGRAM



&Z = Assembly Plant Code
&3 = 3-Digit Date Code
&K = 2-Digits Lot Run Code
22CAN9CC = Specific Device Code

PIN CONNECTIONS

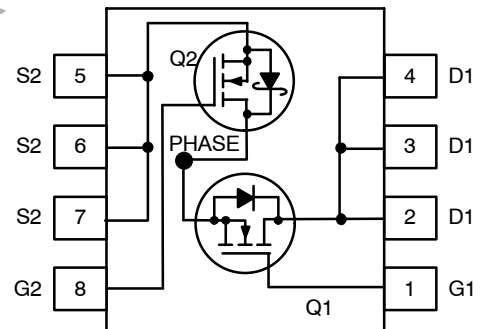

ORDERING INFORMATION

See detailed ordering and shipping information on page 13 of this data sheet.

FDMS3606S

MOSFET MAXIMUM RATINGS (T_A = 25°C unless otherwise noted)

| Symbol | Parameter | | Q1 | Q2 | Unit |
|-----------------------------------|--|--|---------------|---------------|------|
| V _{DS} | Drain to Source Voltage | | 30 | 30 | V |
| V _{GS} | Gate to Source Voltage (Note 3) | | ±20 | ±20 | V |
| I _D | Drain Current | – Continuous (Package Limited) T _C = 25°C | 30 | 40 | A |
| | | – Continuous (Silicon Limited) T _C = 25°C | 60 | 148 | |
| | | – Continuous T _A = 25°C | 13 (Note 1a) | 27 (Note 1b) | |
| | | – Pulsed | 40 | 100 | |
| E _{AS} | Single Pulse Avalanche Energy | | 40 (Note 4) | 162 (Note 5) | mJ |
| P _D | Power Dissipation for Single Operation | T _A = 25°C | 2.2 (Note 1a) | 2.5 (Note 1b) | W |
| | | T _A = 25°C | 1.0 (Note 1c) | 1.0 (Note 1d) | |
| T _J , T _{STG} | Operating and Storage Junction Temperature Range | | –55 to +150 | | °C |

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

THERMAL CHARACTERISTICS (T_A = 25°C unless otherwise noted)

| Symbol | Characteristic | Value | Value | Unit |
|------------------|---|---------------|---------------|------|
| R _{θJA} | Thermal Resistance, Junction to Ambient | 57 (Note 1a) | 50 (Note 1b) | °C/W |
| R _{θJA} | Thermal Resistance, Junction to Ambient | 125 (Note 1c) | 120 (Note 1d) | |
| R _{θJC} | Thermal Resistance, Junction to Case | 3.5 | 2 | |

ELECTRICAL CHARACTERISTICS (T_J = 25°C unless otherwise noted)

| Symbol | Parameter | Test Condition | Type | Min | Typ | Max | Unit |
|-------------------------------------|---|--|----------|----------|----------|------------|-------|
| OFF CHARACTERISTICS | | | | | | | |
| BV _{DSS} | Drain to Source Breakdown Voltage | I _D = 250 μA, V _{GS} = 0 V I _D = 1 mA, V _{GS} = 0 V | Q1 Q2 | 30 30 | – – | – – | V |
| ΔBV _{DSS} /ΔT _J | Breakdown Voltage Temperature Coefficient | I _D = 250 μA, referenced to 25°C I _D = 10 mA, referenced to 25°C | Q1 Q2 | – – | 15 20 | – – | mV/°C |
| I _{DSS} | Zero Gate Voltage Drain Current | V _{DS} = 24 V, V _{GS} = 0 V | Q1 Q2 | – – | – – | 1 500 | μA |
| I _{GSS} | Gate to Source Leakage Current, Forward | V _{GS} = 20 V, V _{DS} = 0 V | Q1 Q2 | – – | – – | 100 100 | nA |

ON CHARACTERISTICS

| | | | | | | | |
|---------------------------------------|--|--|----------|-------------|-------------------|-------------------|-------|
| V _{GS(th)} | Gate to Source Threshold Voltage | V _{GS} = V _{DS} , I _D = 250 μA V _{GS} = V _{DS} , I _D = 1 mA | Q1 Q2 | 1.1 1.1 | 2 1.8 | 2.7 3 | V |
| ΔV _{GS(th)} /ΔT _J | Gate to Source Threshold Voltage Temperature Coefficient | I _D = 250 μA, referenced to 25°C I _D = 10 mA, referenced to 25°C | Q1 Q2 | – – | –6 –5 | – – | mV/°C |
| r _{DS(on)} | Drain to Source On Resistance | V _{GS} = 10 V, I _D = 13 A V _{GS} = 4.5 V, I _D = 11 A V _{GS} = 10 V, I _D = 13 A, T _J = 125°C | Q1 | – – – | 5.8 8.5 7.8 | 8 11 10.8 | mΩ |
| | | V _{GS} = 10 V, I _D = 27 A V _{GS} = 4.5 V, I _D = 23 A V _{GS} = 10 V, I _D = 27 A, T _J = 125°C | Q2 | – – – | 1.4 2 1.9 | 1.9 2.8 2.8 | |
| g _{FS} | Forward Transconductance | V _{DS} = 5 V, I _D = 13 A V _{DS} = 5 V, I _D = 27 A | Q1 Q2 | – – | 61 154 | – – | S |

DYNAMIC CHARACTERISTICS

| | | | | | | | |
|------------------|------------------------------|--|----------|------------|--------------|--------------|----|
| C _{iss} | Input Capacitance | Q1: V _{DS} = 15 V, V _{GS} = 0 V, f = 1 MHz Q2: V _{DS} = 15 V, V _{GS} = 0 V, f = 1 MHz | Q1 Q2 | – – | 1340 4346 | 1785 5780 | pF |
| C _{oss} | Output Capacitance | | Q1 Q2 | – – | 485 1607 | 645 2140 | pF |
| C _{rss} | Reverse Transfer Capacitance | | Q1 Q2 | – – | 53 103 | 80 155 | pF |
| R _g | Gate Resistance | | Q1 Q2 | 0.2 0.2 | 0.6 0.8 | 2 3 | Ω |

FDMS3606S

ELECTRICAL CHARACTERISTICS (T_J = 25°C unless otherwise noted) (continued)


| Symbol | Parameter | Test Condition | Type | Min | Typ | Max | Unit |
|----------------------------------|-------------------------------|--|------|-----|-----|-----|------|
| SWITCHING CHARACTERISTICS | | | | | | | |
| t _{d(on)} | Turn-On Delay Time | Q1: V _{DD} = 15 V, I _D = 13 A, R _{GEN} = 6 Ω Q2: V _{DD} = 15 V, I _D = 27 A, R _{GEN} = 6 Ω | Q1 | – | 8.2 | 16 | ns |
| t _r | Rise Time | | Q2 | – | 15 | 27 | ns |
| t _{d(off)} | Turn-Off Delay Time | | Q1 | – | 2.5 | 10 | ns |
| t _f | Fall Time | | Q2 | – | 5.5 | 11 | ns |
| Q _g | Total Gate Charge | V _{GS} = 0 V to 10 V | Q1 | – | 21 | 29 | nC |
| | | | Q2 | – | 59 | 83 | nC |
| Q _g | Total Gate Charge | V _{GS} = 0 V to 4.5 V | Q1 | – | 10 | 14 | nC |
| | | | Q2 | – | 27 | 38 | nC |
| Q _{gs} | Gate to Source Gate Charge | Q1 V _{DD} = 15 V, I _D = 13 A | Q1 | – | 3.9 | – | nC |
| | | | Q2 | – | 12 | – | nC |
| Q _{gd} | Gate to Drain "Miller" Charge | Q2 V _{DD} = 15 V, I _D = 27 A | Q1 | – | 3.1 | – | nC |
| | | | Q2 | – | 5.7 | – | nC |

DRAIN-SOURCE CHARACTERISTICS


| | | | | | | | |
|-----------------|---------------------------------------|--|----|---|-----|-----|----|
| V _{SD} | Source to Drain Diode Forward Voltage | V _{GS} = 0 V, I _S = 13 A (Note 2) V _{GS} = 0 V, I _S = 27 A (Note 2) | Q1 | – | 0.8 | 1.2 | V |
| | | | Q2 | – | 0.8 | 1.2 | V |
| t _{rr} | Reverse Recovery Time | Q1 I _F = 13 A, di/dt = 100 A/μs | Q1 | – | 25 | 40 | ns |
| | | | Q2 | – | 39 | 62 | ns |
| Q _{rr} | Reverse Recovery Charge | Q2 I _F = 27 A, di/dt = 300 A/μs | Q1 | – | 9 | 18 | nC |
| | | | Q2 | – | 57 | 91 | nC |

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.


1. R_{θJA} is determined with the device mounted on a 1 in² pad 2 oz copper pad on a 1.5 x 1.5 in. board of FR-4 material. R_{θJC} is guaranteed by design while R_{θCA} is determined by the user's board design.



a. 57°C/W when mounted on a 1 in² pad of 2 oz copper



b. 50°C/W when mounted on a 1 in² pad of 2 oz copper



c. 125°C/W when mounted on a minimum pad of 2 oz copper



d. 120°C/W when mounted on a minimum pad of 2 oz copper

2. Pulse Test: Pulse Width < 300 μs, Duty cycle < 2.0%.
3. As an N-ch device, the negative V_{gs} rating is for low duty cycle pulse occurrence only. No continuous rating is implied.
4. E_{AS} of 40 mJ is based on starting T_J = 25°C; N-ch: L = 1 mH, I_{AS} = 9 A, V_{DD} = 27 V, V_{GS} = 10 V. 100% test at L = 0.3 mH, I_{AS} = 14 A.
5. E_{AS} of 162 mJ is based on starting T_J = 25°C; N-ch: L = 1 mH, I_{AS} = 18 A, V_{DD} = 27 V, V_{GS} = 10 V. 100% test at L = 0.3 mH, I_{AS} = 27 A.

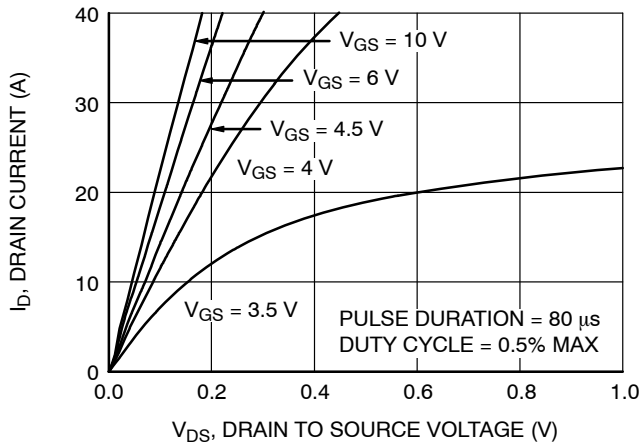
TYPICAL CHARACTERISTICS (Q1 N-CHANNEL) ($T_J = 25^\circ\text{C}$ unless otherwise noted)

Figure 1. On Region Characteristics

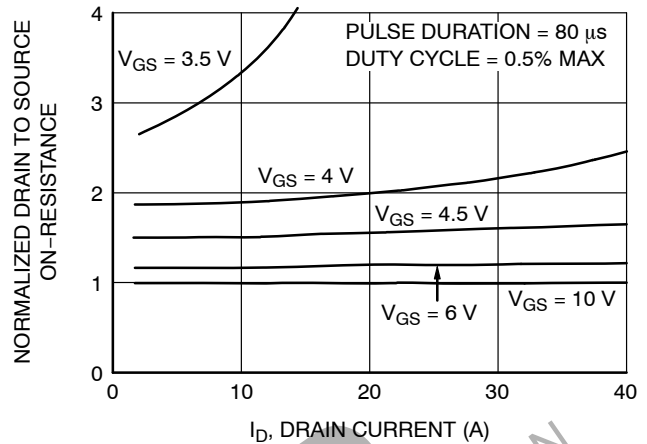


Figure 2. Normalized On-Resistance vs. Drain Current and Gate Voltage

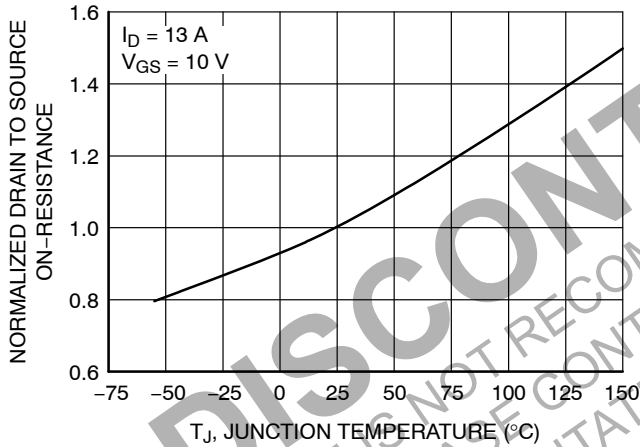


Figure 3. Normalized On Resistance vs. Junction Temperature

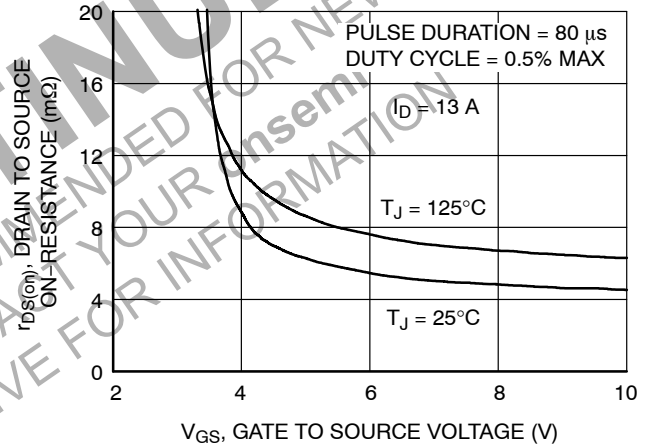


Figure 4. On-Resistance vs. Gate to Source Voltage

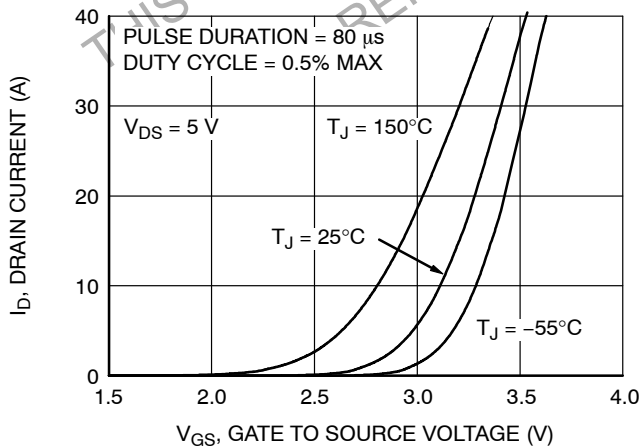


Figure 5. Transfer Characteristics

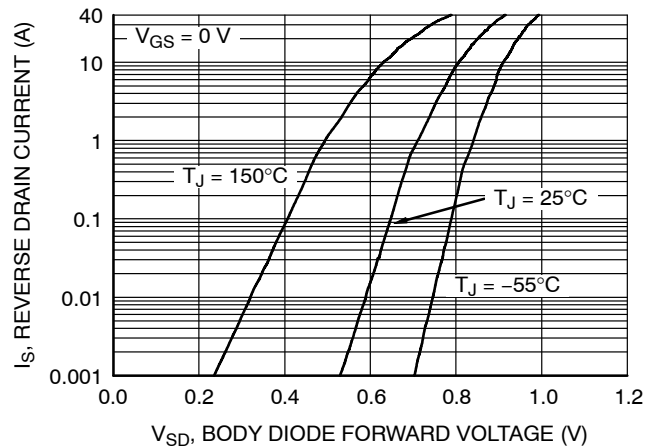


Figure 6. Source to Drain Diode Forward Voltage vs. Source Current

TYPICAL CHARACTERISTICS (Q1 N-CHANNEL) ($T_J = 25^\circ\text{C}$ unless otherwise noted) (continued)

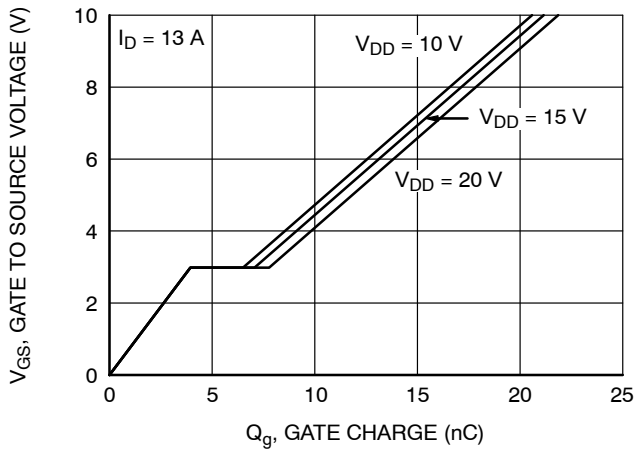


Figure 7. Gate Charge Characteristics

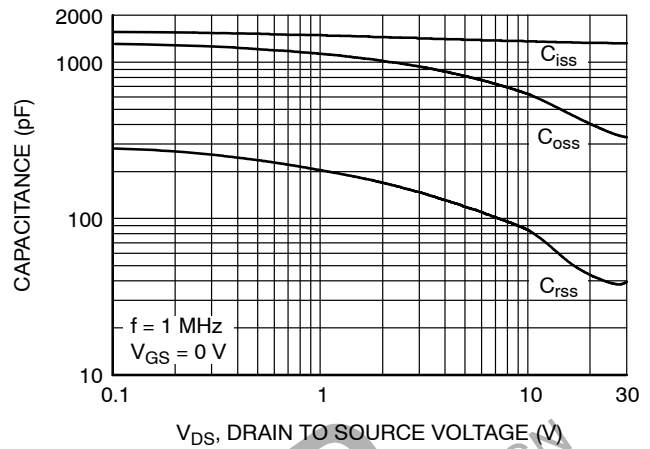


Figure 8. Capacitance vs. Drain to Source Voltage

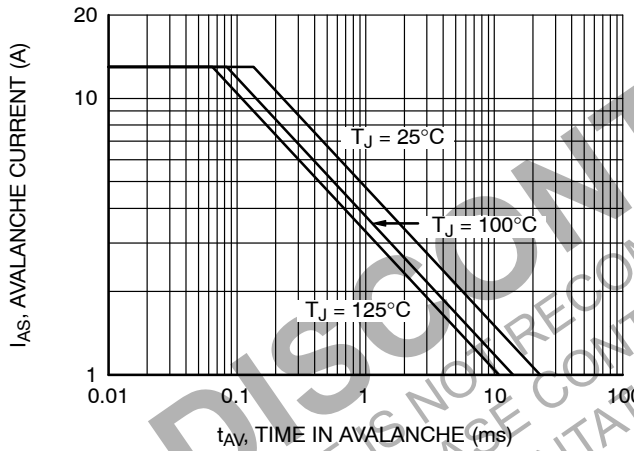


Figure 9. Unclamped Inductive Switching Capability

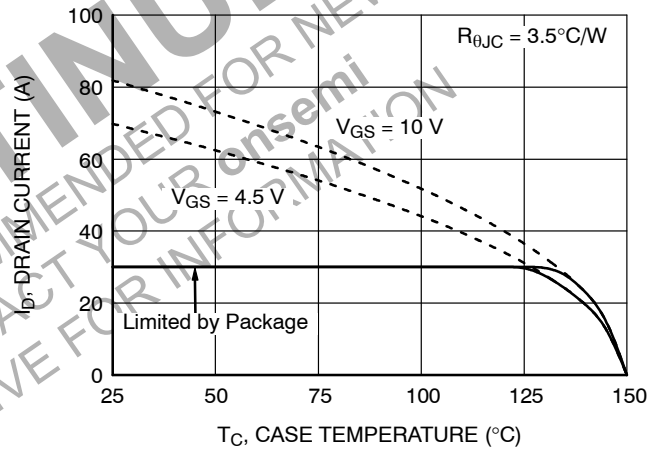


Figure 10. Maximum Continuous Drain Current vs. Case Temperature

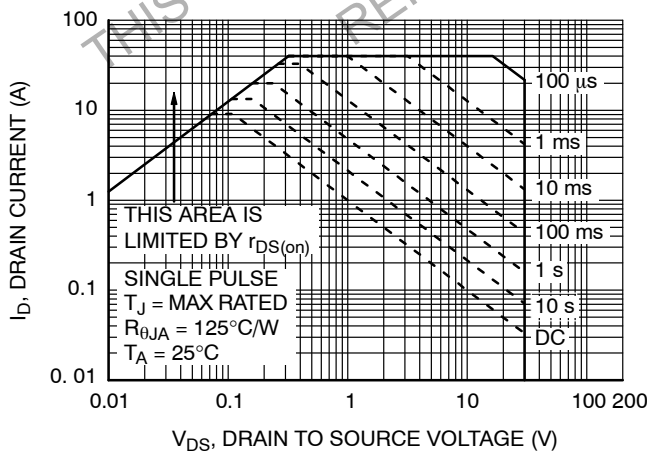


Figure 11. Forward Bias Safe Operating Area

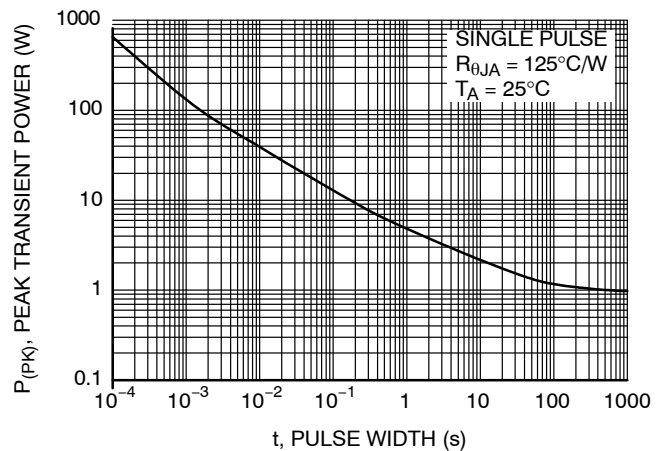


Figure 12. Single Pulse Maximum Power Dissipation

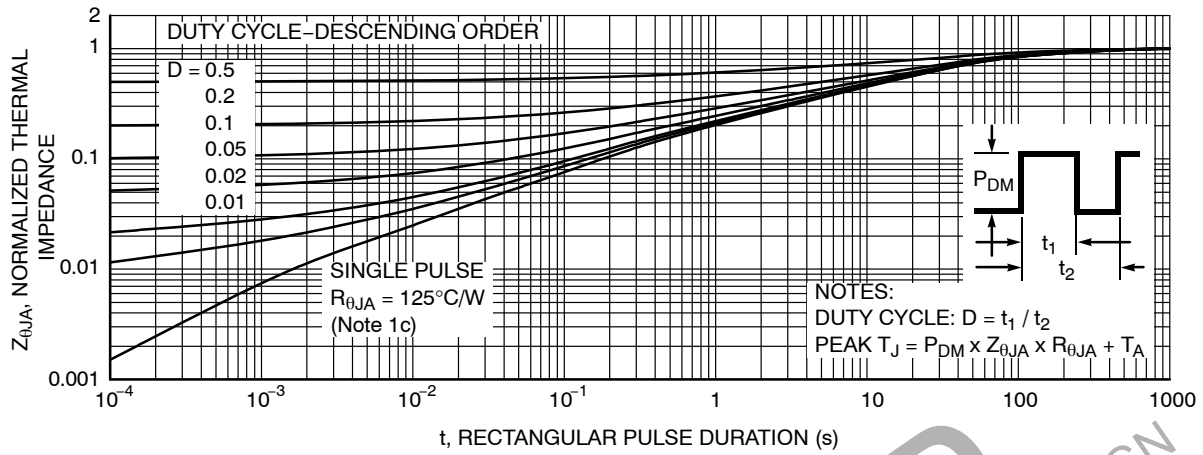
TYPICAL CHARACTERISTICS (Q1 N-CHANNEL) ($T_J = 25^\circ\text{C}$ unless otherwise noted) (continued)

Figure 13. Junction-to-Ambient Transient Thermal Response Curve

DISCONTINUED

THIS DEVICE IS NOT RECOMMENDED FOR NEW DESIGN
PLEASE CONTACT YOUR onsemi
REPRESENTATIVE FOR INFORMATION

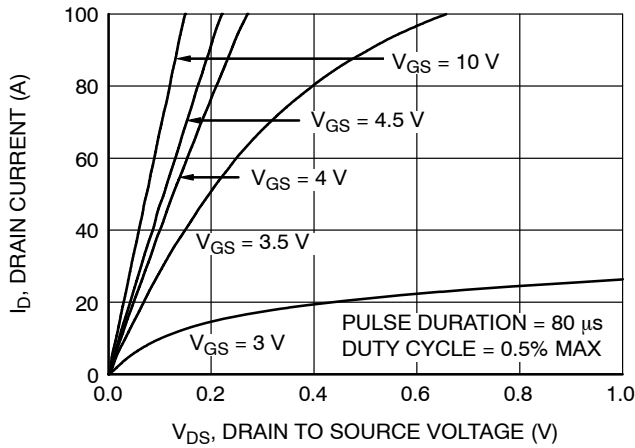
TYPICAL CHARACTERISTICS (Q2 N-CHANNEL) ($T_J = 25^\circ\text{C}$ unless otherwise noted)

Figure 14. On Region Characteristics

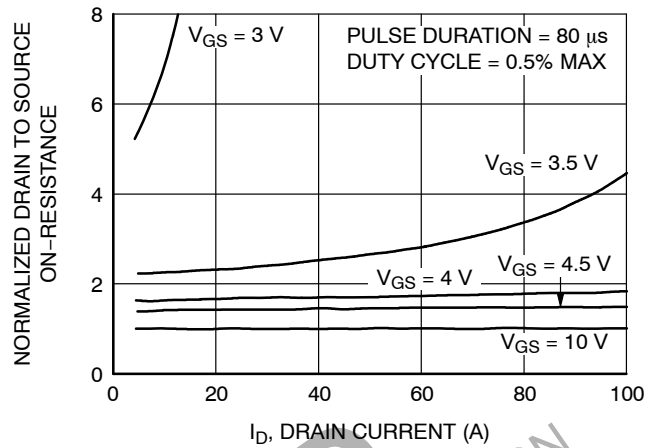


Figure 15. Normalized On-Resistance vs. Drain Current and Gate Voltage

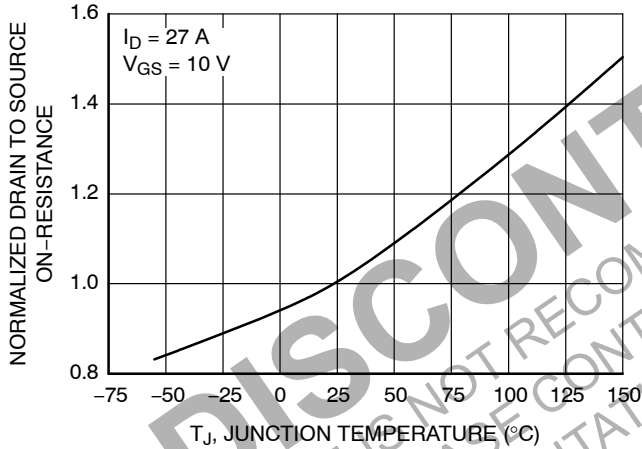


Figure 16. Normalized On Resistance vs. Junction Temperature

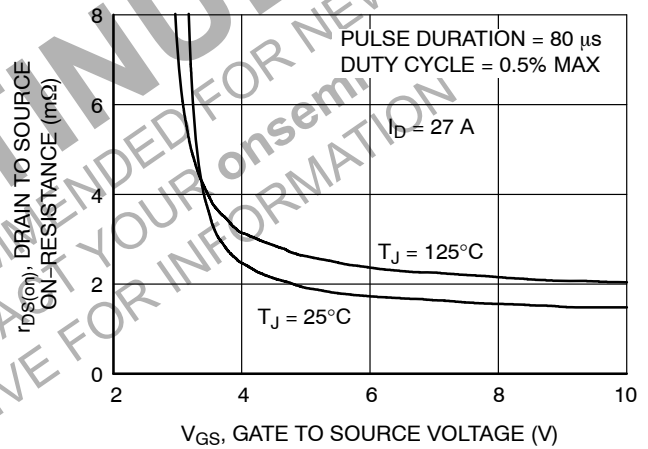


Figure 17. On-Resistance vs. Gate to Source Voltage

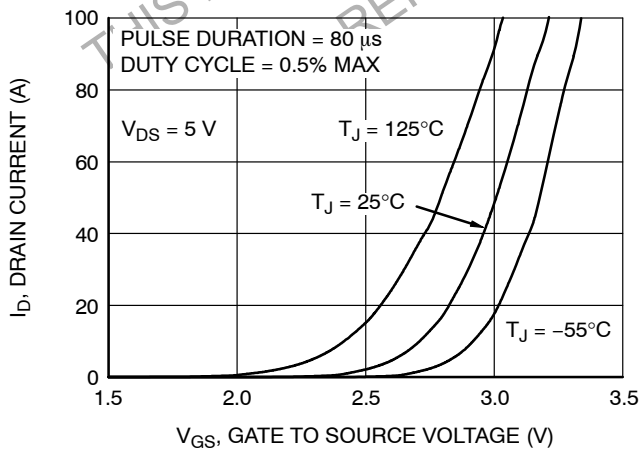


Figure 18. Transfer Characteristics

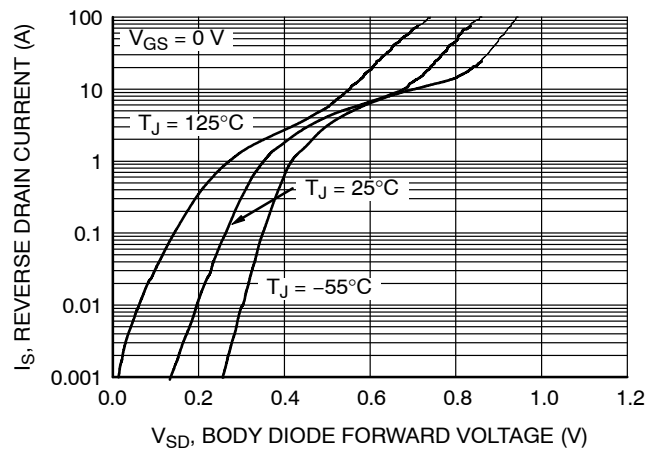


Figure 19. Source to Drain Diode Forward Voltage vs. Source Current

TYPICAL CHARACTERISTICS (Q2 N-CHANNEL) ($T_J = 25^\circ\text{C}$ unless otherwise noted) (continued)

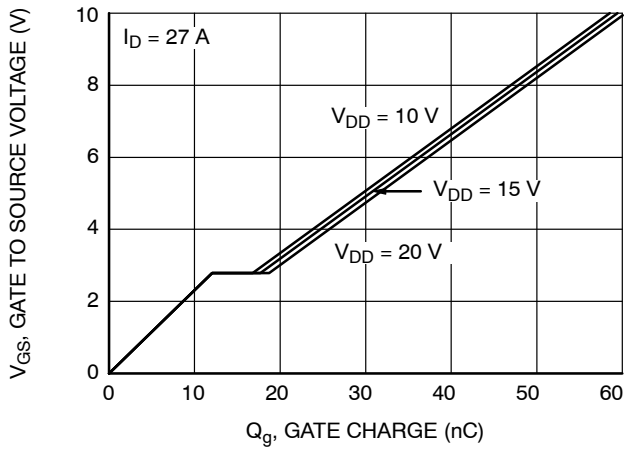


Figure 20. Gate Charge Characteristics

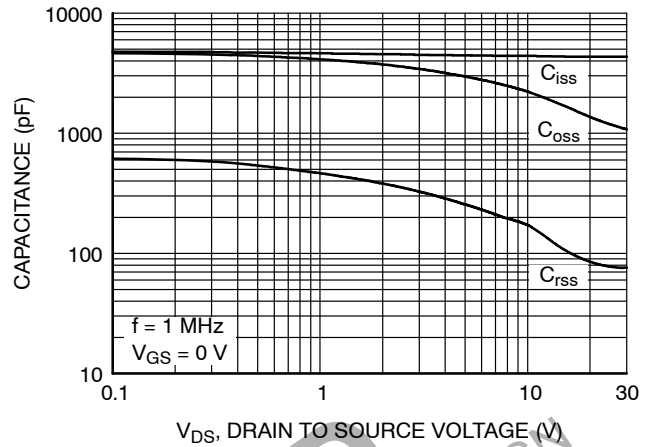


Figure 21. Capacitance vs. Drain to Source Voltage

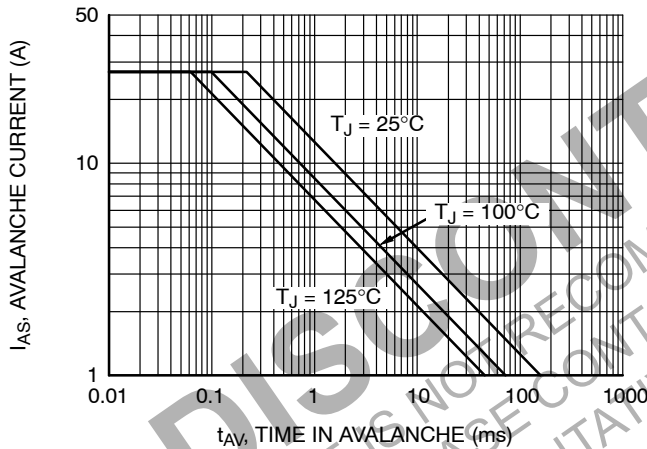


Figure 22. Unclamped Inductive Switching Capability

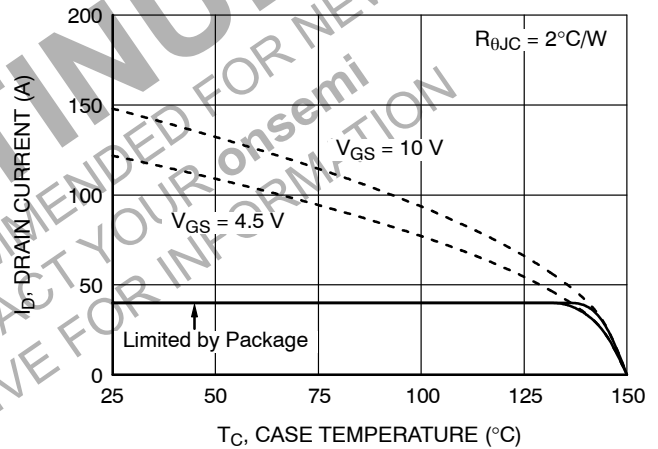


Figure 23. Maximum Continuous Drain Current vs. Case Temperature

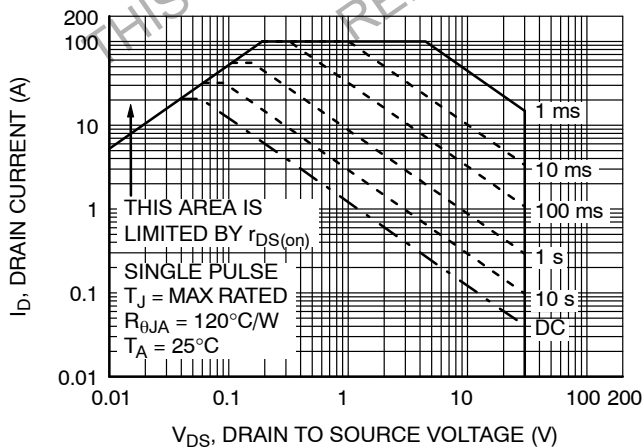


Figure 24. Forward Bias Safe Operating Area

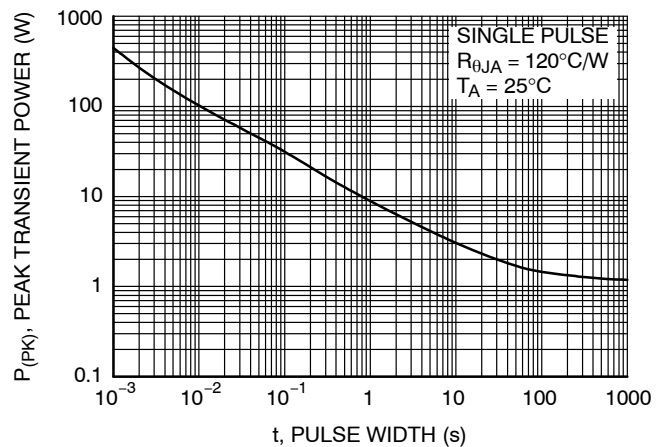


Figure 25. Single Pulse Maximum Power Dissipation

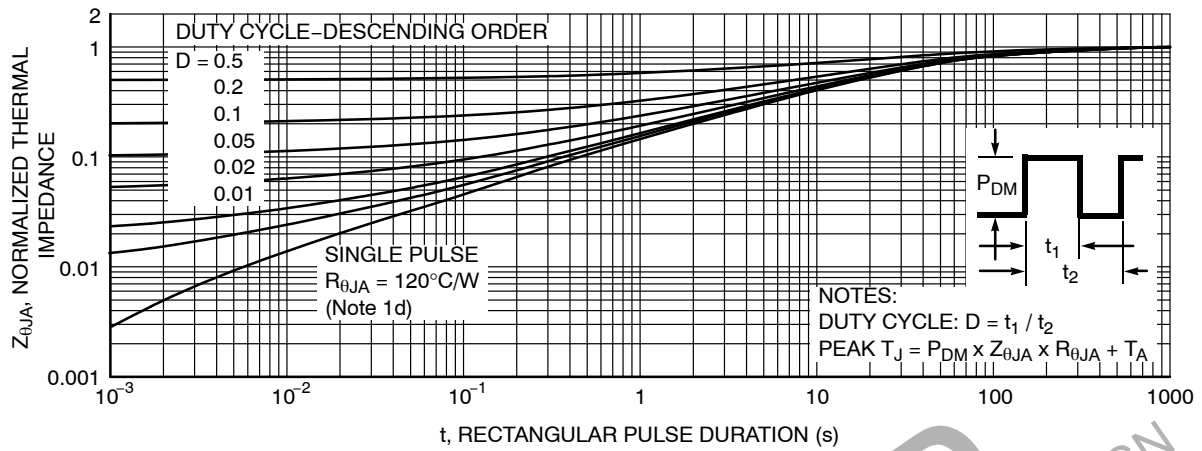
TYPICAL CHARACTERISTICS (Q2 N-CHANNEL) ($T_J = 25^\circ\text{C}$ unless otherwise noted) (continued)

Figure 26. Junction-to-Ambient Transient Thermal Response Curve

DISCONTINUED

THIS DEVICE IS NOT RECOMMENDED FOR NEW DESIGN
PLEASE CONTACT YOUR onsemi
REPRESENTATIVE FOR INFORMATION

TYPICAL CHARACTERISTICS (continued)

SyncFET Schottky Body Diode Characteristics

onsemi's SyncFET process embeds a Schottky diode in parallel with POWERTRENCH MOSFET. This diode exhibits similar characteristics to a discrete external Schottky diode in parallel with a MOSFET. Figure 27 shows the reverse recovery characteristic of the FDMS3606S.

Schottky barrier diodes exhibit significant leakage at high temperature and high reverse voltage. This will increase the power in the device.

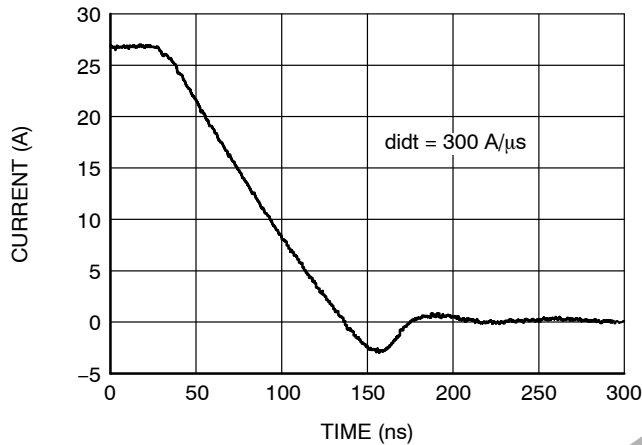


Figure 27. FDMS3606S SyncFET Body Diode Reverse Recovery Characteristic

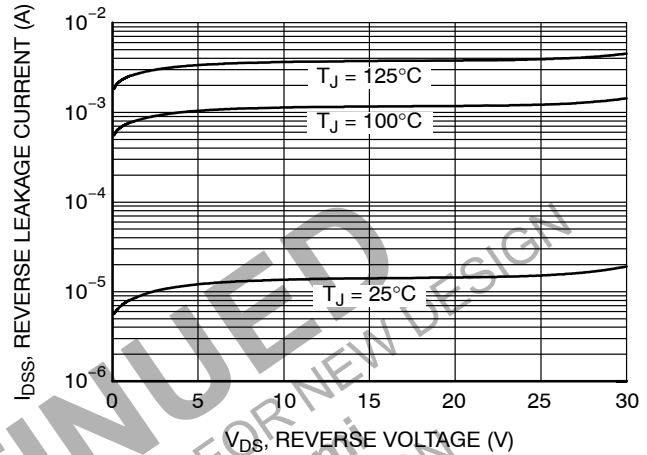



Figure 28. SyncFET Body Diode Reverse Leakage versus Drain-Source Voltage

APPLICATION INFORMATION


Switch Node Ringing Suppression

onsemi's Power Stage products incorporate a proprietary design* that minimizes the peak overshoot, ringing voltage on the switch node (PHASE) without the need of any

external snubbing components in a buck converter. As shown in the Figure 29, the Power Stage solution rings significantly less than competitor solutions under the same set of test conditions.

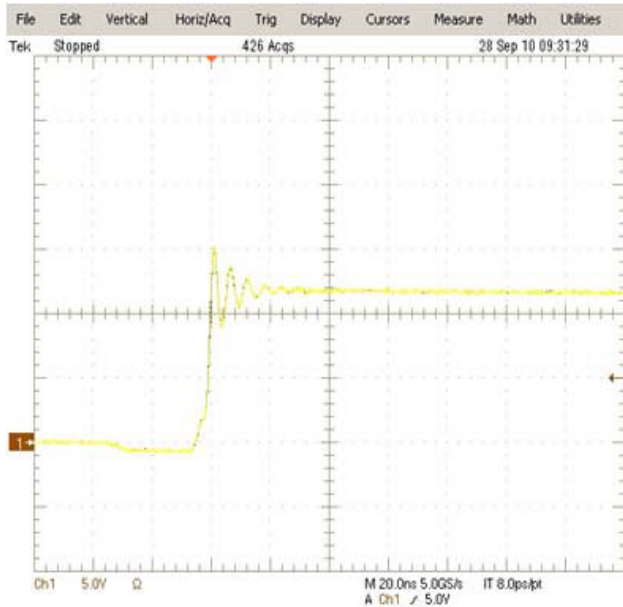

Power Stage Device

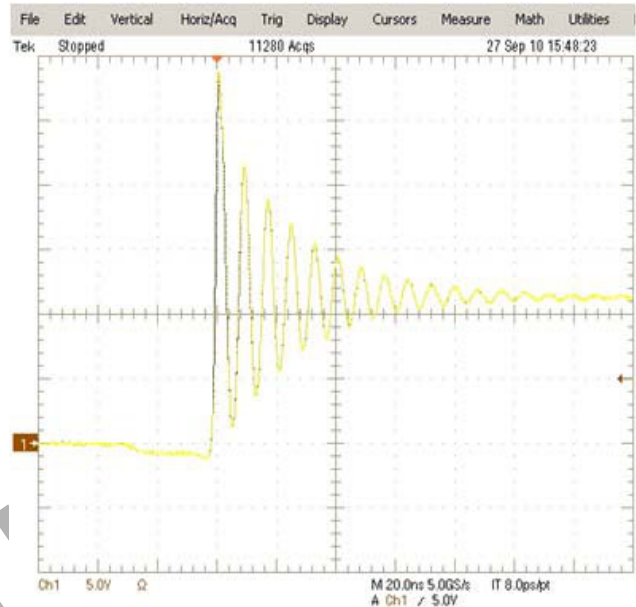

Competitors Solution

Figure 29. Power Stage Phase Node Rising Edge, High Side Turn On

*Patent Pending

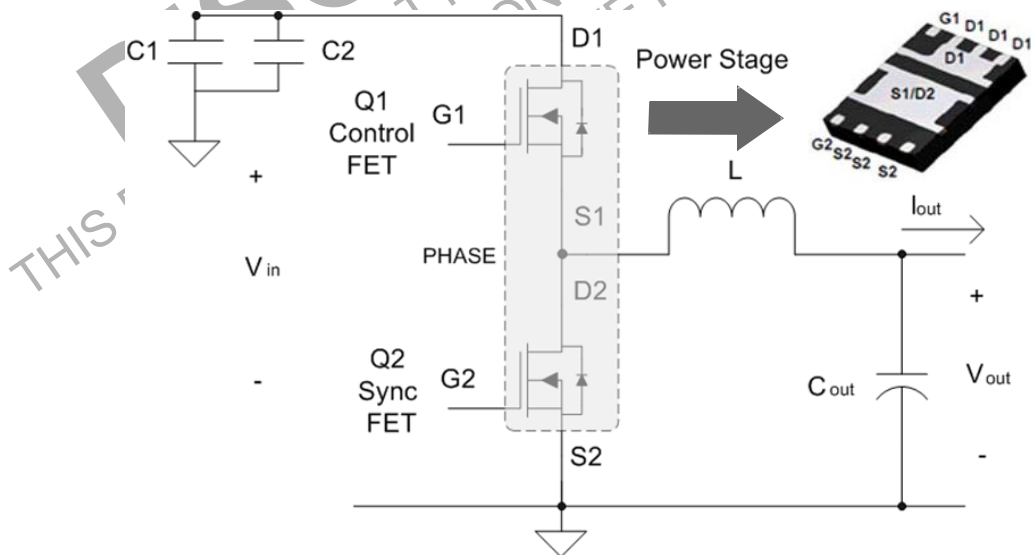


Figure 30. Shows the Power Stage in a Buck Converter Topology

Recommended PCB Layout Guidelines

As a PCB designer, it is necessary to address critical issues in layout to minimize losses and optimize the performance of the power train. Power Stage is a high power density solution and all high current flow paths, such as VIN (D1), PHASE

(S1/D2) and GND (S2), should be short and wide for better and stable current flow, heat radiation and system performance. A recommended layout procedure is discussed below to maximize the electrical and thermal performance of the part.

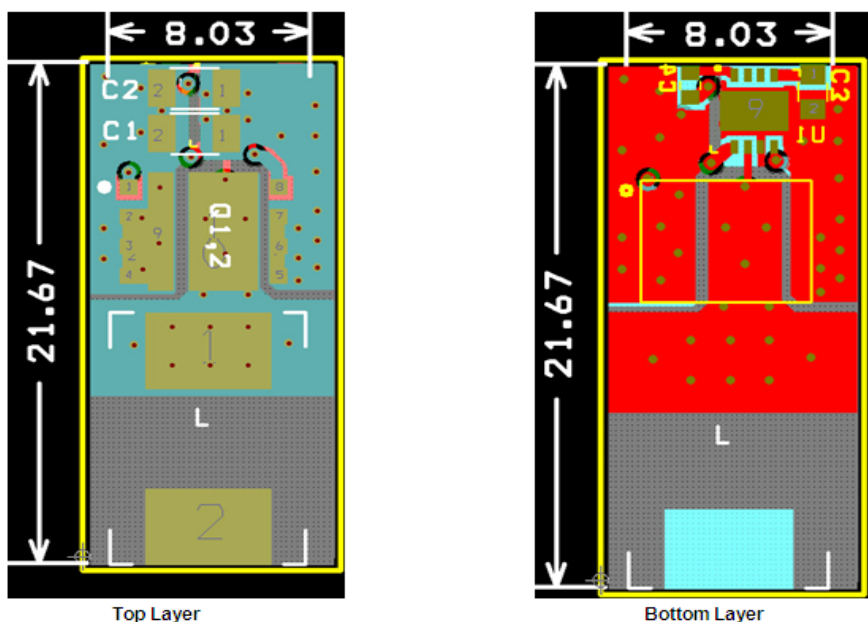


Figure 31. Recommended PCB Layout

Following is a guideline, not a requirement which the PCB designer should consider:

1. Input ceramic bypass capacitors C1 and C2 must be placed close to the D1 and S2 pins of Power Stage to help reduce parasitic inductance and High Frequency conduction loss induced by switching operation. C1 and C2 show the bypass capacitors placed close to the part between D1 and S2. Input capacitors should be connected in parallel close to the part. Multiple input caps can be connected depending upon the application.
2. The PHASE copper trace serves two purposes; In addition to being the current path from the Power Stage package to the output inductor (L), it also serves as heat sink for the lower FET in the Power Stage package. The trace should be short and wide enough to present a low resistance path for the high current flow between the Power Stage and the inductor. This is done to minimize conduction losses and limit temperature rise. Please note that the PHASE node is a high voltage and high frequency switching node with high noise potential. Care should be taken to minimize coupling to adjacent traces. The reference layout in Figure 31 shows a good balance between the thermal and electrical performance of Power Stage.
3. Output inductor location should be as close as possible to the Power Stage device for lower power

loss due to copper trace resistance. A shorter and wider PHASE trace to the inductor reduces the conduction loss. Preferably the Power Stage should be directly in line (as shown in Figure 31) with the inductor for space savings and compactness.

4. The POWER TRENCH Technology MOSFETs used in the Power Stage are effective at minimizing phase node ringing. It allows the part to operate well within the breakdown voltage limits. This eliminates the need to have an external snubber circuit in most cases. If the designer chooses to use an RC snubber, it should be placed close to the part between the PHASE pad and S2 pins to dampen the high-frequency ringing.
5. The driver IC should be placed close to the Power Stage part with the shortest possible paths for the High Side gate and Low Side gates through a wide trace connection. This eliminates the effect of parasitic inductance and resistance between the driver and the MOSFET and turns the devices on and off as efficiently as possible. At higher-frequency operation this impedance can limit the gate current trying to charge the MOSFET input capacitance. This will result in slower rise and fall times and additional switching losses. Power Stage has both the gate pins on the same side of the package which allows for back mounting of the driver IC to the board. This provides a very compact path for the drive signals and improves efficiency of the part.

FDMS3606S

6. S2 pins should be connected to the GND plane with multiple vias for a low impedance grounding. Poor grounding can create a noise transient offset voltage level between S2 and driver ground. This could lead to faulty operation of the gate driver and MOSFET.
7. Use multiple vias on each copper area to interconnect top, inner and bottom layers to help smooth current flow and heat conduction. Vias

should be relatively large, around 8 mils to 10 mils, and of reasonable inductance. Critical high frequency components such as ceramic bypass caps should be located close to the part and on the same side of the PCB. If not feasible, they should be connected from the backside via a network of low inductance vias.

PACKAGE MARKING AND ORDERING INFORMATION


| Device | Device Marking | Package Type | Reel Size | Tape Width | Shipping [†] |
|-----------|----------------|--|-----------|------------|-----------------------|
| FDMS3606S | 22CAN9CC | PQFN8 5X6, 1.27P (Power 56) (Pb-Free, Halide Free) | 13" | 12 mm | 3000 / Tape & Reel |

[†]For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.


DISCONTINUED
THIS DEVICE IS NOT RECOMMENDED FOR NEW DESIGN
PLEASE CONTACT YOUR onsemi
REPRESENTATIVE FOR INFORMATION

POWERTRENCH is registered trademark of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries.


SyncFET is trademark of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries.


PQFN8 5X6, 1.27P (SAWN TYPE)
CASE 483AJ
ISSUE A


DATE 08 FEB 2021

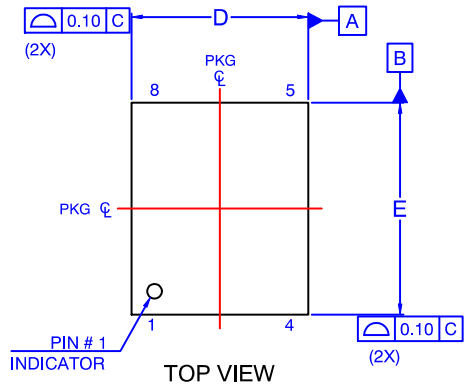


TOP VIEW

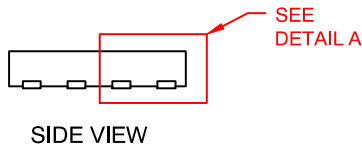

SIDE VIEW

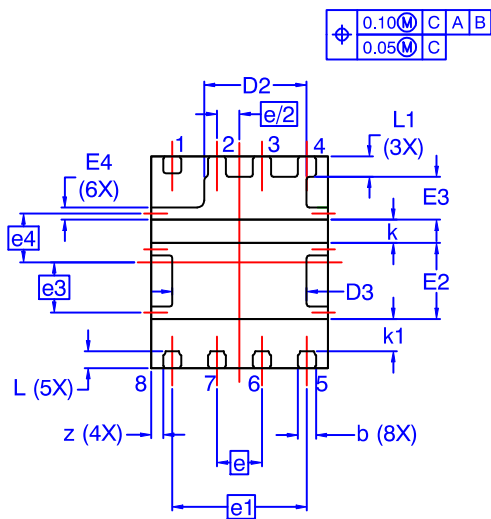


BOTTOM VIEW

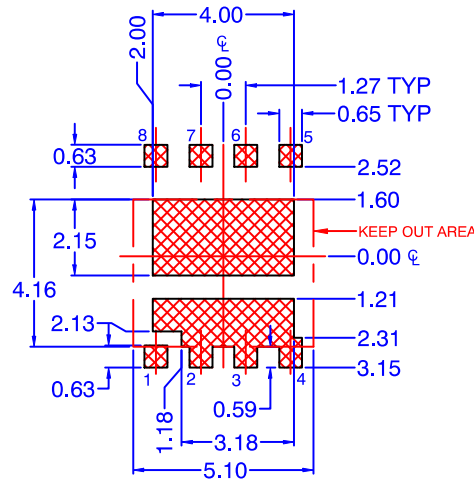OPTION - A (SAWN TYPE)

**LAND PATTERN
RECOMMENDATION
FOR SAWN / PUNCHED TYPE**

*FOR ADDITIONAL INFORMATION ON OUR PB-FREE STRATEGY AND SOLDERING DETAILS, PLEASE DOWNLOAD THE ON SEMICONDUCTOR SOLDERING AND MOUNTING TECHNIQUES REFERENCE MANUAL, SOLDERM/D.
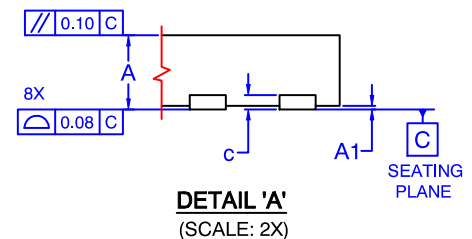
| DIM | MILLIMETERS | | |
|-----|-------------|------|------|
| | MIN. | NOM. | MAX. |
| A | 0.90 | 1.00 | 1.10 |
| A1 | 0.00 | - | 0.05 |
| b | 0.31 | 0.51 | 0.61 |
| c | 0.10 | 0.20 | 0.30 |
| D | 4.90 | 5.00 | 5.10 |
| D2 | 2.80 | 2.90 | 3.16 |
| D3 | 3.70 | 3.80 | 4.08 |
| E | 5.90 | 6.00 | 6.25 |
| E2 | 2.05 | 2.15 | 2.25 |
| E3 | 1.12 | 1.22 | 1.34 |
| E4 | 0.25 | 0.35 | 0.45 |
| e | 1.27 BSC | | |
| e1 | 3.81 BSC | | |
| e/2 | 0.635 BSC | | |
| e3 | 1.43 BSC | | |
| e4 | 1.38 BSC | | |
| k | 0.61 | 0.66 | 0.71 |
| k1 | 0.82 | 0.92 | 1.02 |
| L | 0.38 | 0.48 | 0.65 |
| L1 | 0.48 | 0.58 | 0.68 |
| z | 0.34 REF | | |



DETAIL 'A'
(SCALE: 2X)

| | | |
|-------------------------|-------------------------|--|
| DOCUMENT NUMBER: | 98AON13659G | Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| DESCRIPTION: | PQFN8 5X6, 1.27P | PAGE 1 OF 2 |


onsemi and Onsemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

PQFN8 5X6, 1.27P (PUNCHED TYPE)
CASE 483AJ
ISSUE A


DATE 08 FEB 2021

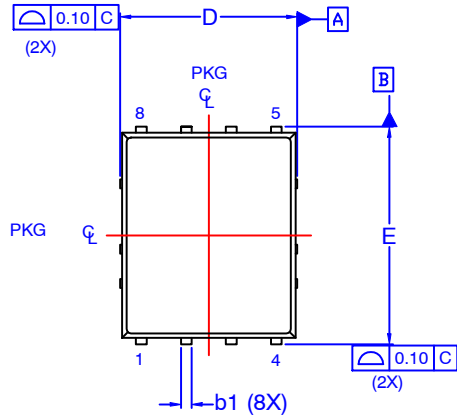


TOP VIEW

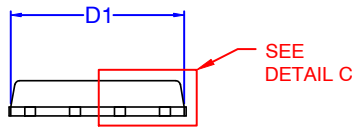


SIDE VIEW

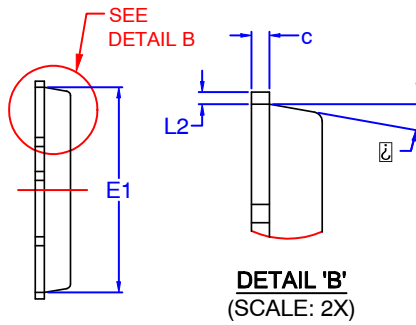

DETAIL 'B'
(SCALE: 2X)

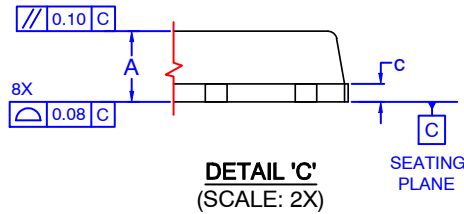

DETAIL 'C'
(SCALE: 2X)

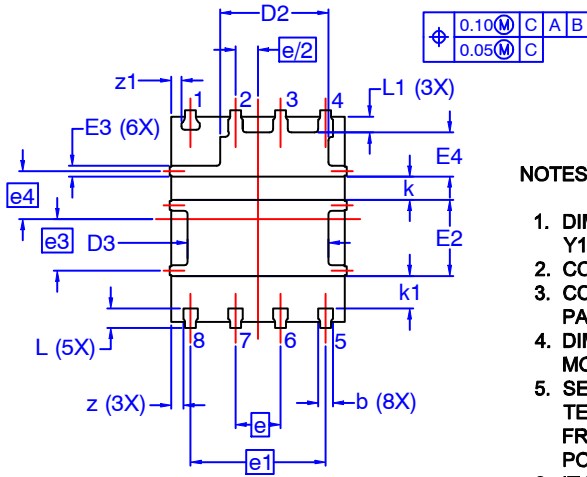

BOTTOM VIEW
OPTION - B (PUNCHED TYPE)

| DIM | MILLIMETERS | | |
|-----|-------------|------|------|
| | MIN. | NOM. | MAX. |
| A | 0.90 | 1.00 | 1.10 |
| b | 0.31 | 0.51 | 0.61 |
| b1 | 0.21 | 0.31 | 0.41 |
| c | 0.15 | 0.25 | 0.35 |
| D | 4.90 | 5.00 | 5.10 |
| D1 | 4.80 | 4.90 | 5.00 |
| D2 | 2.80 | 3.06 | 3.16 |
| D3 | 3.70 | 3.98 | 4.08 |
| E | 5.90 | 6.00 | 6.25 |
| E1 | 5.70 | 5.80 | 5.90 |
| E2 | 2.05 | 2.15 | 2.25 |
| E3 | 0.25 | 0.33 | 0.45 |
| E4 | 1.12 | 1.24 | 1.34 |
| e | 1.27 BSC | | |
| e1 | 3.81 BSC | | |
| e/2 | 0.635 BSC | | |
| e3 | 1.45 BSC | | |
| e4 | 1.36 BSC | | |
| k | 0.61 | 0.66 | 0.71 |
| k1 | 0.82 | 0.92 | 1.02 |
| L | 0.38 | 0.55 | 0.65 |
| L1 | 0.35 | 0.45 | 0.55 |
| L2 | 0.08 | 0.18 | 0.28 |
| z | 0.34 REF | | |
| z1 | 0.28 REF | | |
| θ | 0° | - | 10° |

NOTES:

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 2009.
2. CONTROLLING DIMENSION: MILLIMETERS
3. COPLANARITY APPLIES TO THE EXPOSED PADS AS WELL AS THE TERMINALS.
4. DIMENSIONS D1 AND E1 DO NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR GATE BURRS.
5. SEATING PLANE IS DEFINED BY THE TERMINALS. "A1" IS DEFINED AS THE DISTANCE FROM THE SEATING PLANE TO THE LOWEST POINT ON THE PACKAGE BODY.
6. IT IS RECOMMENDED TO HAVE NO TRACES OR VIAS WITHIN THE KEEP OUT AREA.

| | | |
|-------------------------|-------------------------|--|
| DOCUMENT NUMBER: | 98AON13659G | Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| DESCRIPTION: | PQFN8 5X6, 1.27P | PAGE 2 OF 2 |

onsemi and Onsemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

onsemi, **Onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:

Technical Library: www.onsemi.com/design/resources/technical-documentation
onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at
www.onsemi.com/support/sales