
ISEM

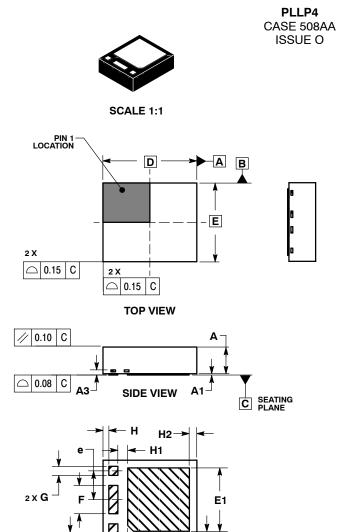

J1

D1

BOTTOM VIEW

NOTES:

DIMENSIONS AND TOLERANCING PER ASME Y14.5M, 1994.
DIMENSIONS IN MILLIMETERS.
TOLERANCES: ±0.10 MM.

DATE 21 JUL 2004

	MILLIMETERS		
DIM	MIN	MAX	
Α	1.750	1.950	
A1	0.000	0.050	
A3	0.254 REF		
В	0.500	0.700	
D	6.200 BSC		
D1	3.979	4.179	
Е	5.200 BSC		
E1	4.087	4.287	
е	1.905 BSC		
F	1.860	1.880	
G	0.500	0.700	
Н	0.379 REF		
H1	0.635 REF		
H2	0.507 REF		
J	0.404 REF		
J1	0.507 REF		

GENERIC **MARKING DIAGRAM***

AYWW

= Specific Device Code XXXXX = Assembly Location А

= Year

γ

ww = Work Week

*This information is generic. Please refer to device data sheet for actual part marking.

Pb-Free indicator, "G" or microdot " .", may or may not be present.

DOCUMENT NUMBER:	98AON19199D	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.			
DESCRIPTION:	PLLP4, 6.2X5.2X1.85 MM PITCH		PAGE 1 OF 1		
onsemi and ONSEMi are trademarks of Semiconductor Components Industries. LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves					

the right to make charges without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products herein.

в

.1