








WDFN6 2x2, 0.65P CASE 511CB ISSUE O

DATE 25 MAR 2014

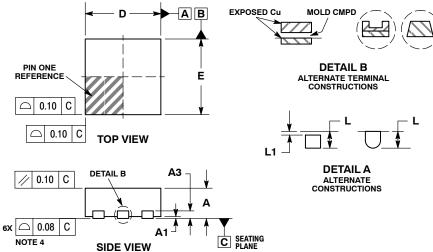



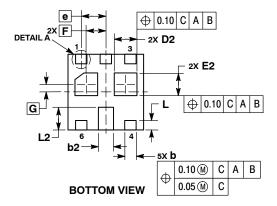

- NOTES:
 1. DIMENSIONING AND TOLERANCING PER
- ASME Y14.5M, 1994.
 CONTROLLING DIMENSION: MILLIMETERS.
 DIMENSION b APPLIES TO PLATED
- TERMINAL AND IS MEASURED BETWEEN
 0.15 AND 0.25 mm FROM THE TERMINAL TIP.
 COPLANARITY APPLIES TO THE EXPOSED
 PAD AS WELL AS THE TERMINALS.

	MILLIMETERS		
DIM	MIN	MAX	
Α	0.70	0.80	
A1	0.00	0.05	
A3	0.20 REF		
b	0.25	0.35	
b2	0.35	0.45	
D	2.00 BSC		
D2	0.55	0.65	
E	2.00 BSC		
E2	0.55	0.65	
е	0.65 BSC		
F	0.52 BSC		
G	0.20 BSC		
L	0.20	0.30	
L1		0.15	
L2	0.55	0.65	

GENERIC MARKING DIAGRAM*




XX = Specific Device Code M = Date Code

*This information is generic. Please refer to

device data sheet for actual part marking. Pb-Free indicator, "G" or microdot " ■", may or may not be present.

RECOMMENDED MOUNTING FOOTPRINT

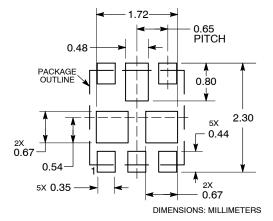

DOCUMENT NUMBER:	98AON83453F Electronic versions are uncontrolled except when accessed directly from the Document Repositor Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.		
DESCRIPTION:	WDFN6 2X2, 0.65P		PAGE 1 OF 1

onsemi and Onsemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries, onsemi reserves brisefin and of 160 m are trademarked so defined values of services and of the confined values and of the values of the confined values and of the values of the confined values and of the values of the v special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.