




XDFN10 2.50x1.35, 0.5P CASE 711AX **ISSUE A**

DATE 12 APR 2016

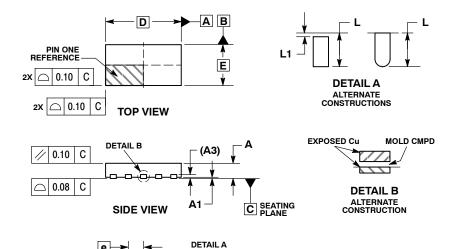

10X L

10X b

BOTTOM VIEW

0.10 M C A B

0.05 M

С моте з



- DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
- ASME Y14.5M, 1994.
 CONTROLLING DIMENSION: MILLIMETERS.
 DIMENSIONS 5 APPLIES TO PLATED
 TERMINAL AND IS MEASURED BETWEEN
 0.15 AND 0.30 MM FROM THE TERMINAL TIP.

	MILLIMETERS		
DIM	MIN	MAX	
Α	0.40	0.50	
A1	0.00	0.05	
A3	0.15 REF		
b	0.15	0.25	
D	2.50 BSC		
Е	1.35 BSC		
е	0.50 BSC		
L	0.40	0.60	
L1		0.15	

GENERIC MARKING DIAGRAM*




XX = Specific Device Code

= Date Code

= Pb-Free Package

*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot " ■", may or may not be present.

RECOMMENDED MOUNTING FOOTPRINT



DOCUMENT NUMBER:	98AON90283F	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.	
DESCRIPTION:	XDFN10 2.50X1.35, 0.5P		PAGE 1 OF 1

onsemi and ONSEMI are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves brisefin and of 160 m are trademarked so defined values of services and of the confined values and of the values of the confined values and of the values of the confined values and of the values of the v special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.