

Ezairo® 7111 Hybrid Demo Board User Manual



ON Semiconductor®

www.onsemi.com

INTRODUCTION

Purpose

This manual provides information on the configuration and use of the Ezairo7111 Hybrid Demonstrator Board.

Conventions

Component and pin names are marked by the use of Monospace Font.

Intended Audience

This manual is for engineers, developers, and anyone else who requires technical information about the Ezairo 7111 Hybrid Demo Board.

EVAL BOARD USER'S MANUAL

Further Reading

For any technical information not covered in this manual, refer to the following documents:

- Promira™ Serial Platform Quick Start Guide (available at totalphase.com)
- Communication Accelerator Adaptor Manual
- Ezairo 7111 Datasheet
- Ezairo Sound Designer Software User Manual

Board Design

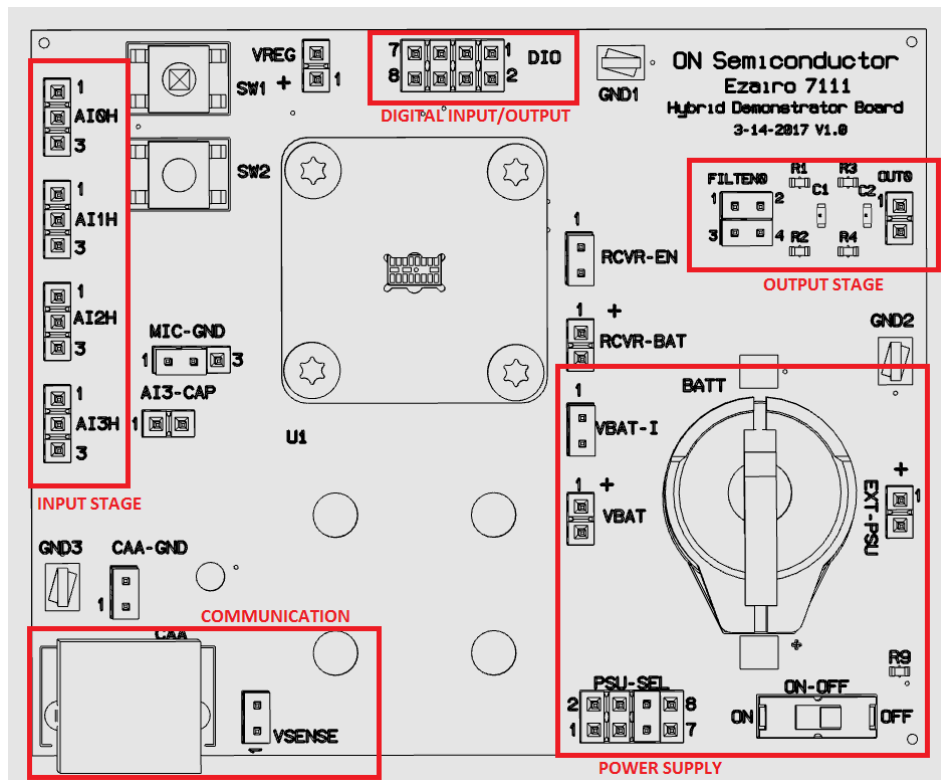


Figure 1. Ezairo 7111 Hybrid Demonstrator Board Overview

GETTING STARTED

Introduction

This chapter is about setting up the hybrid demonstrator board for use. You have to provide it with power and connect it to your computer. You will also need to manually insert the Ezairo 7111 hybrid into the designated socket. This chapter also describes how to connect the board to your computer using a programming box, and first steps for using the Ezairo Sound Designer software.

To get started, you will need the following:

- Ezairo 7111 Hybrid Demonstrator Board and Ezairo 7111 hybrid sample
- A supported programming box and respective driver installed

NOTE: (For a full list of supported programmers, see Chapter 2.3.1)

- Ezairo Sound Designer Software (available on request from your Account Manager)

Ezairo 7111 Hybrid Socket

The socket used on the Ezairo 7111 Hybrid Demonstrator Board is designed for easy, tool-free, use. The following are the steps required to ensure the socket is functioning properly.

Aligning the Clamp

1. Ensure that the rubber plunger sits flush with the top of the grey adapter plate near the end of the range of motion of the clamp
2. With minimal pressure, the clamp should lock into place
3. Ensure that the rubber plunger lines up with the cutout in the grey adapter plate
4. Tighten all nuts fully if adjustment was required.



Figure 2. Aligning the Clamp with the Adaptor Plate

Inserting the Hybrid

1. Open the clamp fully
2. Align the pin 1 marker on the Ezairo 7111 Hybrid with the marker on the adapter plate
3. Insert the hybrid into the socket (ensure the hybrid is fully inserted and level)
4. Fully close the clamp, ensuring it locks into place

NOTE: The clamp should not require more than 1 kg to fully close.

Power Supply

The Ezairo 7111 Hybrid Demonstrator Board can be powered on using the ON-OFF switch. Power can be

supplied to the VBAT pin in one of four ways, as outlined in Table 1 below:

Table 1. POWER SUPPLY SELECTION

PSU_SEL	Power Supply Source
Short pin 1 to 2	CS44 Connector (Pads on bottom of board)
Short pin 3 to 4	6-Pin DIN (CAA Connector)
Short pin 5 to 6	External Bench Supply (EXT_PSU header)
Short pin 7 to 8	Battery (On board battery holder)

Table 2. VBAT SUPPLY

Pin Name	Min	Nom	Max
VBAT	1.05 V	1.25 V	2.0 V

Communication

Communication between your computer and the Ezairo 7111 hybrid can be achieved through a programming interface. The following programmers are supported:

- Promira Serial Interface from Total Phase, Inc., driver version 1.3.6
- Communication Accelerator Adaptor (CAA), driver version 1.3
- HI-PRO, driver version 2.0.0.4

- NOAHlink
- DSP programmer version 3

The serial interface can be connected to Ezairo through the 6-pin DIN connector. Alternately, the pads required for communication (SCL, SDA, PSU, GND) are available on the bottom of the board for custom I²C connectors such as the CS44 connector typically used on hearing aids.




Figure 3. Evaluation and Development Board Setup

Table 3. DIN CONNECTOR PIN-OUT

Pin Number	Serial Interface Pin Description
1	Supply Voltage from the Serial Interface
2	System Ground
3	SCL (I ² C Clock)
4	SDA (I ² C Data)
5	VBAT (Sense Voltage)
6	No Connect

Ezairo Sound Designer Software

Here are the steps to setting up your product device for use with the Ezairo Sound Designer software:

NOTE: If you are programming the device with your own firmware, please refer to the documentation provided within the Ezairo 7100 Evaluation & Development Kit.

1. Connect the product to your programmer and to your computer, as follows:
 - ◆ Connect your input source to the negative and center pins of the 3-pin AI1H header
 - ◆ Connect your recording or listening equipment to the output, which is labelled OUT0. You might require an external amplifier to drive headphones from the output
 - ◆ You can use SW1 and SW2 (found on the evaluation board) to adjust the volume
 - ◆ The maximum input signal range is approximately 2 Vpp (volts peak-to-peak)
2. Power on the board by setting ON-OFF to ON
3. Next, start Sound Designer software by double-clicking on the SD/sounddesigner.exe shortcut, which you will find wherever you installed the Sound Designer software files
4. Choose a workspace. If you do not have a workspace directory available, click Browse and the software allows you to create one. If you click Browse and select a pre-existing directory for your workspace, make sure it is empty. For this example, check Import Sample Workspace, and select E7150SL from the drop-down list. Click OK
5. Open the console window by clicking the Show console icon. The console window displays error and status messages accumulated in this session. We recommend having the console viewable at all times while using Sound Designer software, to get immediate status information

6. Click on Control Panel and then, for this example, double-click the Ezairo7150SL.param sample parameter file to open the demo product library.
7. To connect to the device, go to the SETTINGS window. Select the correct Programmer, and Port if applicable. If you also select Verify NVM Writes, the software burns the settings to the device's Non-Volatile Memory and then immediately reads back the settings to confirm that the values burned to the device match what is being read out of the device. This option requires additional programming time. Next, click on Detect. A successful detection will populate the device information in the Device Info box
8. Use the back button—the arrow in the top left corner—to return to the Control Panel
9. To configure the device for the selected product, click Programmer > Connect. If the connection succeeds, the Connection status symbol appears to the right of the File Name. You can hover over this symbol to view the programmer name and the firmware ID of the device. The connected device must now be configured before you can read, burn or write parameters in Control Panel. Click Programmer > Configure to do this
10. Now you are ready to begin. See Chapter 3, “Modeler” on page 15 of the Ezairo Sound Designer Software User Manual for your next steps in the process of developing a product with Sound Designer software

Input Stage

The Ezairo 7111 Hybrid Demonstrator Board provides access to four analog audio inputs (AI0H, AI1H, AI2H, AI3H). The ground reference for the inputs can be adjusted using the MIC-GND header as follows:

Table 4. INPUT GROUND REFERENCE SELECTION

MIC-GND	Input Ground Reference
Short pin 1 to 2	GND_MIC (Note 1)
Short pin 2 to 3	AGND

1. Use GND_MIC reference when input is from a microphone. For other electrical test equipment use AGND.

Output Stage

There is one digital output (RCVRO) available on the board through standard 0.1” header. The direct digital outputs are available on header FILTEN0. Separate RC filter networks are provided to attenuate out-of band noise

from the direct digital outputs when connected to high impedance audio measurement equipment (OUT0). The on-board RC filters are enabled by the FILTEN0 headers as described in the following table.

Table 5. ON-BOARD RC FILTER CONFIGURATION

Function	FILTENO
Disabled	open pins 1 to 2 open pins 3 to 4
Enabled	short pins 1 to 2 short pins 3 to 4

2. To connect receivers or loud speakers (without the RC filter) use headers FILTEN0 pins 1 and 3.

Digital Input/Output (DIO)

The Ezairo 7111 Hybrid Demonstrator Board contains 5 digital I/O (DIO) signals available on DIO 2x4 header that

provide access to a wide variety of interfaces (GPIO, SPI, PCM, I²C, UART, LSAD, clocks). The DIOs are in the VBAT supply domain.

Table 6. DIO REFERENCE DOMAINS


DIOs	DIO Header Pin	Reference Domain
21	7	VBAT
22	5	VBAT
23	3	VBAT
24	1	VBAT
25	2	VBAT

The Ezairo 7111 Hybrid Demonstrator Board also has two momentary switches that can be used as momentary hard pull-downs on DIO24 (SW2) and DIO23 (SW1).


EVBUM2533

APPENDIX A

Schematic

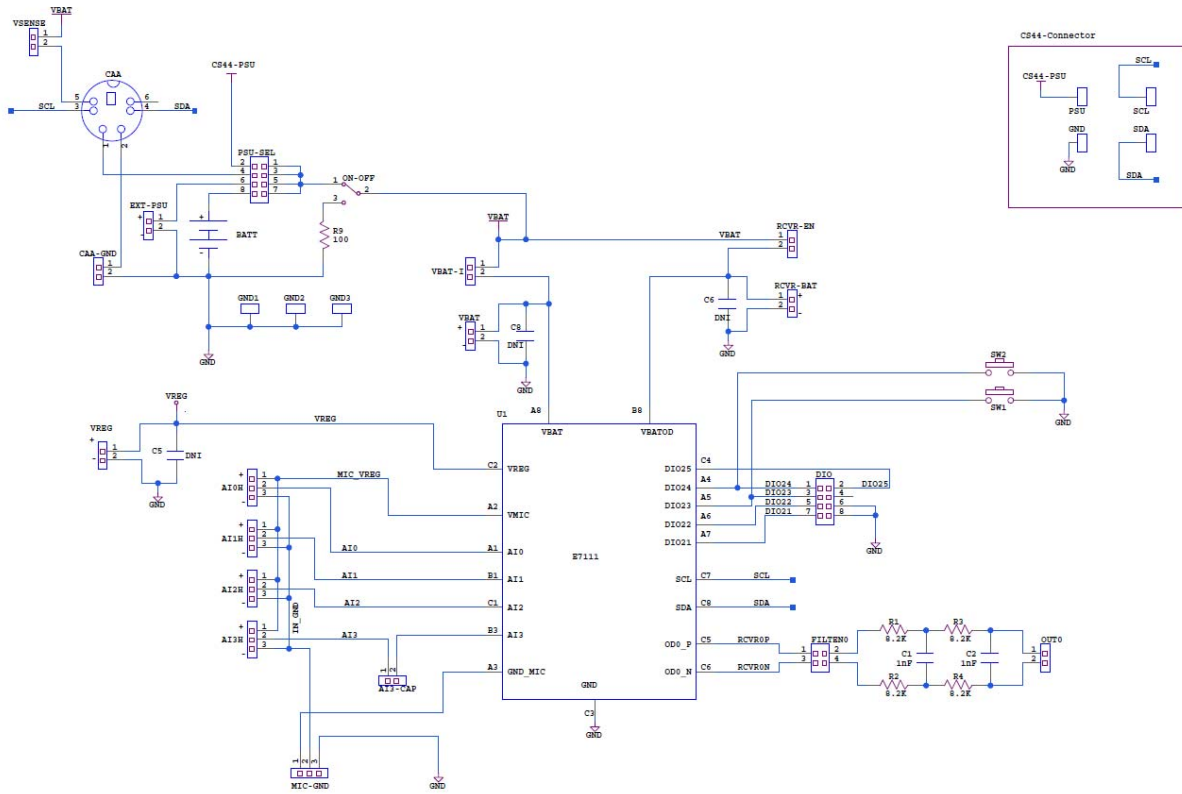

EZAIRO is a registered trademark of Semiconductor Components Industries, LLC (SCILLC) or its subsidiaries in the United States and/or other countries.

ON Semiconductor and  are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:
Literature Distribution Center for ON Semiconductor
19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada
Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free
USA/Canada
Europe, Middle East and Africa Technical Support:
Phone: 421 33 790 2910

ON Semiconductor Website: www.onsemi.com
Order Literature: <http://www.onsemi.com/orderlit>

For additional information, please contact your local Sales Representative