

## NCL30125 Daughter Board User's Manual



ON Semiconductor®

[www.onsemi.com](http://www.onsemi.com)

The NCL30125 daughter board has been designed to replace a forward controller in an existing two-switch forward converter. This user's manual describes the procedure to make this test.

The NCL30125 is a fixed-frequency current-mode controller featuring the Dynamic Self-Supply (DSS). The controller hosts an adjustable switching frequency with jittering function operated in peak current mode control. When the power on the secondary side drops drastically, the part enters skip cycle while limiting the peak current that insures the output voltage regulation and excellent efficiency in light load condition. It features a timer-based fault detection that ensures the detection of overload and a brown-out protection against low input voltages.

### Features

- Integrated High-side Driver
- Adjustable Switching Frequency up to 1 MHz with Frequency Jittering

### EVAl BOARD USER'S MANUAL

- Peak Current-mode Control
- Skip Mode to Maximize Performance in Light Load Conditions
- High-voltage Current Source with DSS
- Brown-out (BO) Detection
- Adjustable Soft-start Duration
- 15-ms Timer-based Short-circuit Protection with Auto-recovery or Latched Operation
- Latched OVP/OTP Input for Improved Robustness
- +0.9 A / -1.2 A Peak Source / Sink Drive Capability

The evaluation board needs to be plugged into an existing application. Below is a schematic example of a 120-W/12-V application with the NCP1252. The floating high-side MOSFET is driven thanks to a pulse transformer.

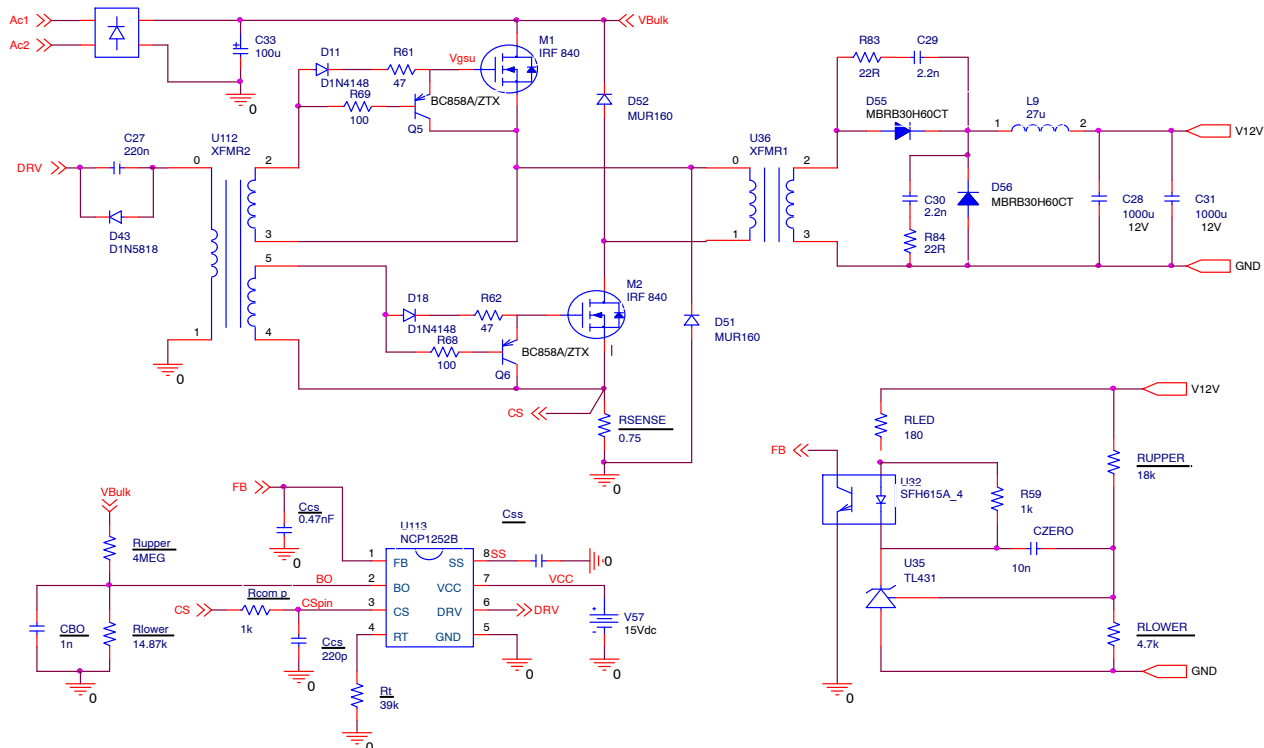



Figure 1. Application Schematic of the 120-W Adapter

**Connection Diagram**

In order to connect the daughter board, the old controller needs to be unsolder with the pulse transformer. Then the all tests points have to be connected to the main board with short connection. Of course, the ground (GND) node like the current sense (CS) and feedback (FB) connections have to be optimized first.

For the input voltage, it can be connected on the ac mains before the bridge diode or directly on the bulk capacitor.

If the previous schematic with the NCP1252 is modified, it will lead to the following arrangement shown in the Figure 2.

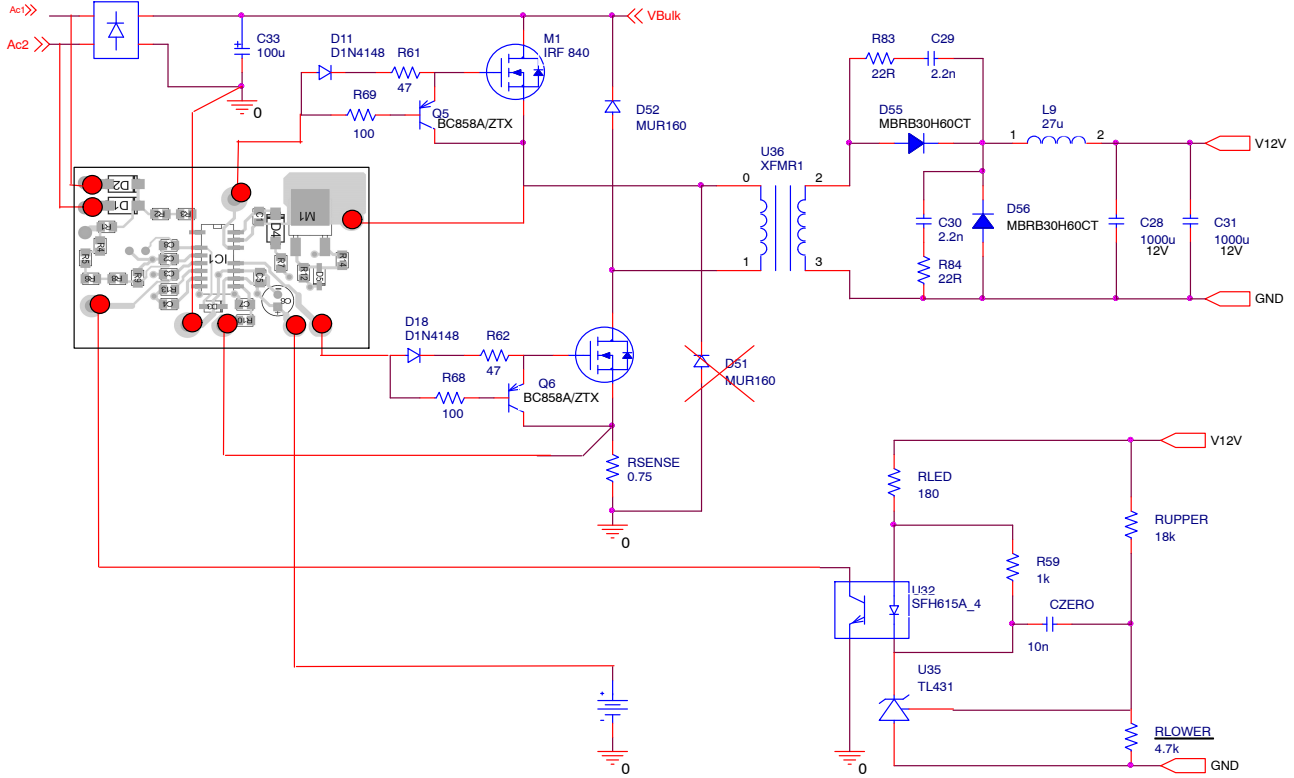

**Figure 2. NCL30125 Daughter Board Inserted in the 120-W Application**

**Evaluation Board Schematic**

The evaluation board has been designed to limit the external components. All needed parts are embedded into this daughter board. The BO thresholds can be adjusted with the resistors R<sub>4</sub>, R<sub>5</sub>, R<sub>6</sub>, R<sub>8</sub> and R<sub>9</sub>. The switching frequency can be changed thanks to the resistor R<sub>13</sub> and the soft-start duration via the capacitor C<sub>4</sub>. Finally, the ramp compensation will be affected by the resistor R<sub>10</sub>.

Please note that a 1-nF capacitor is placed close to the FB pin so the capacitor soldered on the power board needs to be removed to avoid compensation issue.

Finally, thanks to the MOSFET M<sub>1</sub> on the daughter board, the freewheel diode connected between the ground and the HB node can be removed on the mother board.

**Layout**

The PCB consists of a two layers FR4 board with 35 μm copper cladding. All components are soldered on the top side (only two through-hole components – NTC and V<sub>CC</sub> capacitor).

All decoupling components as well as other small low-current devices (timing capacitors, feedback decoupling...) have been placed as close as possible to the control IC. The 3<sup>rd</sup> MOSFET M<sub>1</sub> used to refresh the bootstrap capacitor during the start-up and skip mode has to be placed as closed as possible to the high side driver in order to avoid large noise peak current. Short connections must be used between the HB pin and the drain and also between IC GND and source pin.

# EVBUM2670

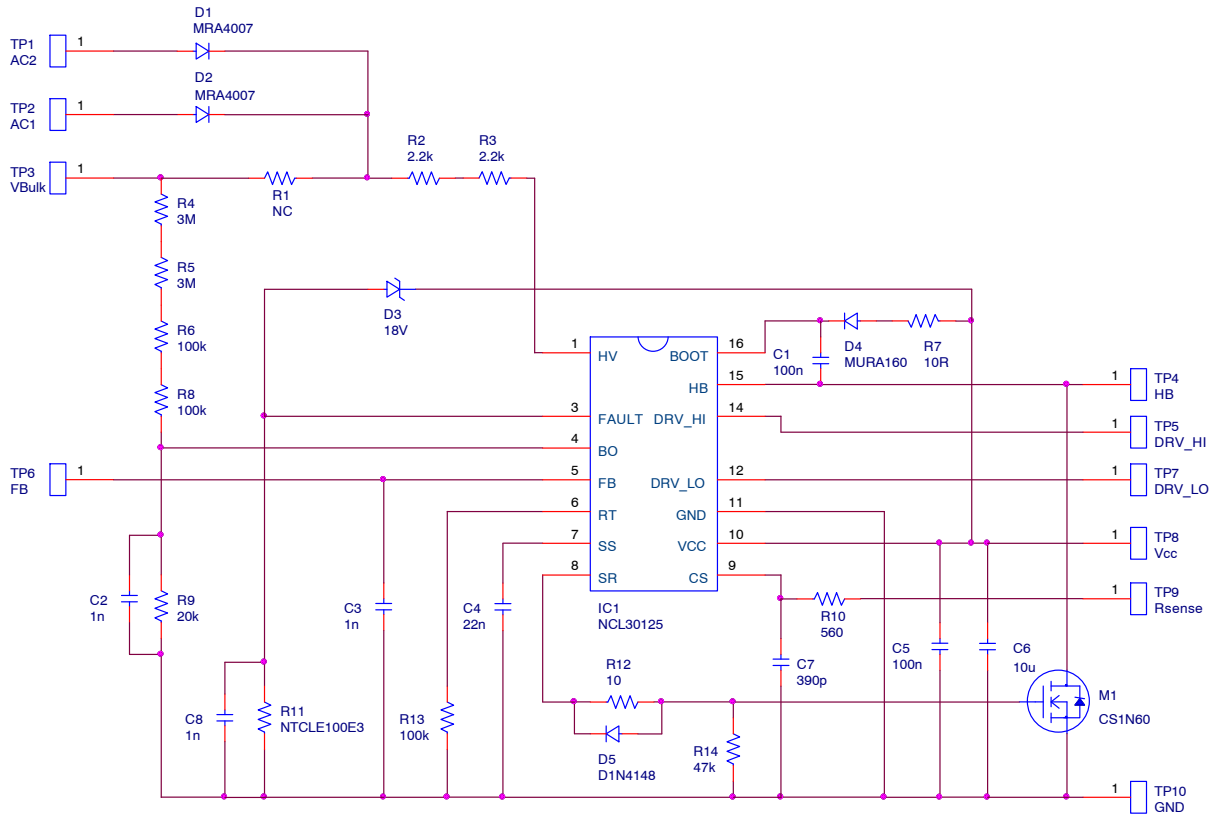


Figure 3. Daughter Board Schematic

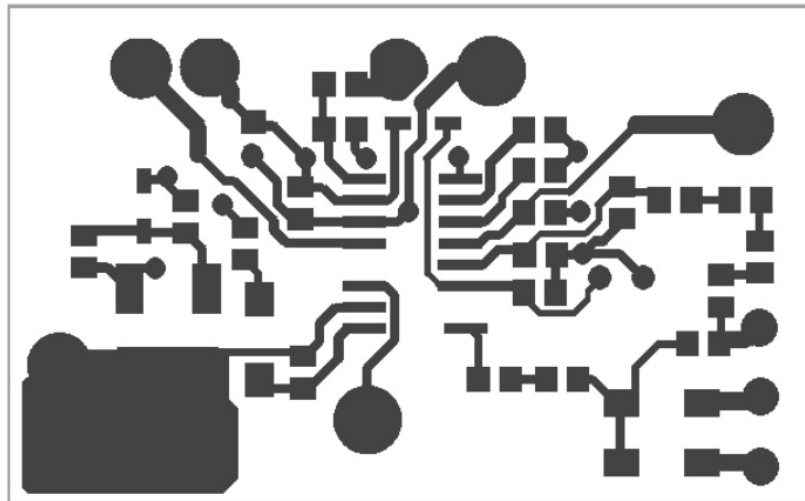


Figure 4. Top Layer

EVBUM2670

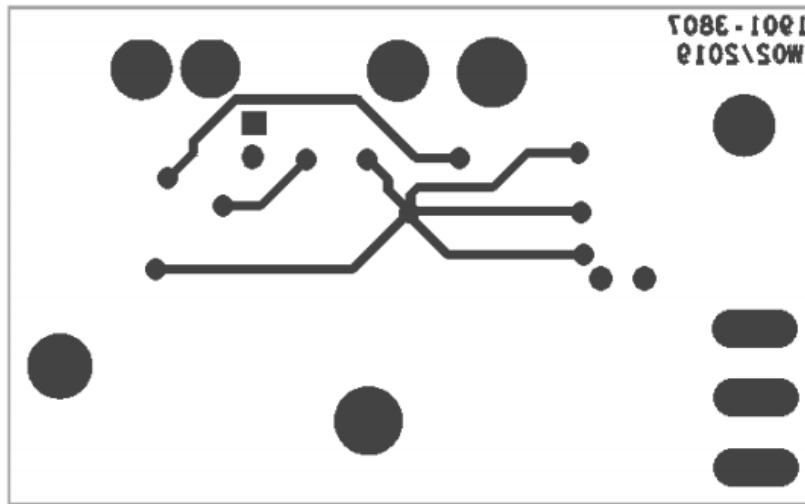


Figure 5. Bottom Layer

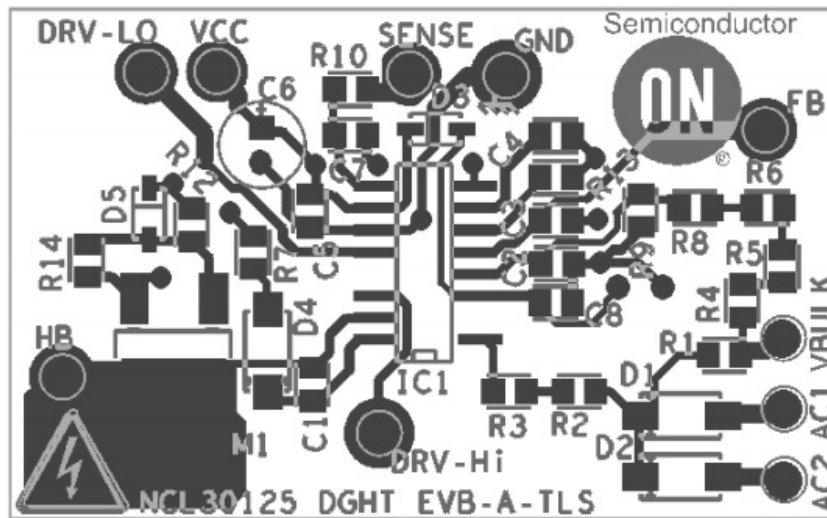


Figure 6. Top Side Components

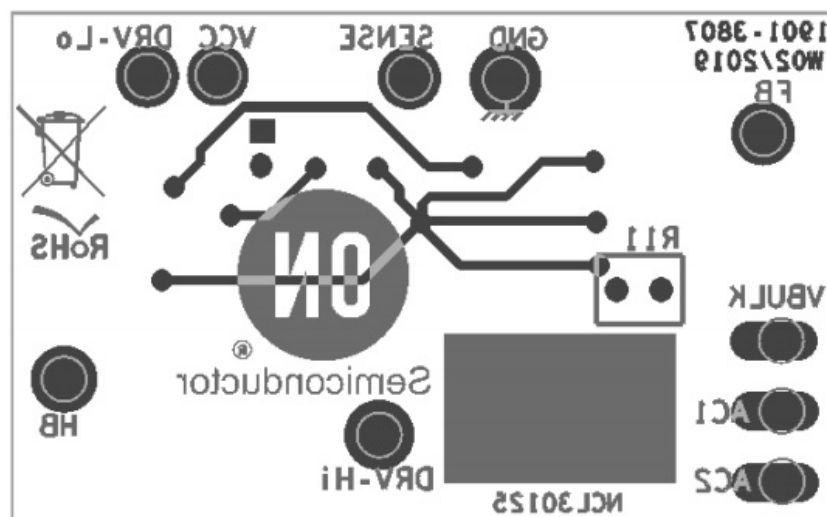


Figure 7. Bottom Side Components



Figure 8. Top Side Daughter Board Picture

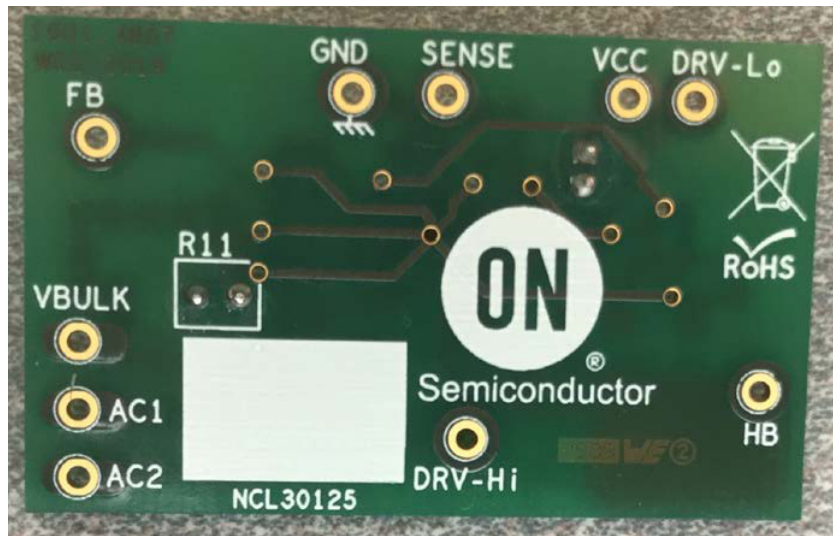


Figure 9. Bottom Side Daughter Board Picture

# EVBUM2670

**Table 1. BILL OF MATERIAL**

Designator	Quantity	Description	Value	Tolerance	Footprint	Manufacturer Part Number	Substitution Allowed
C1,C5	2	Ceramic Capacitor	100 nF	10%, 50 V	0805	Standard	Yes
C2, C3, C8	3	Ceramic Capacitor	1 nF	10%, 50 V	0805	Standard	Yes
C4	1	Ceramic Capacitor	22 nF	10%, 50 V	0805	Standard	Yes
C6	1	Electrolytic Capacitor	10 $\mu$ F	50 V	D5_H11_P2	860160672009	Yes
C7	1	Ceramic Capacitor	390 pF	10%, 50 V	805	Standard	Yes
D1, D2	2	Power Rectifiers	MRA4007	1 A, 1 kV	SMA	ON Semiconductor	Yes
D3	1	Zener Diode	18 V		SOD-123	Standard	Yes
D4	1	Power Rectifiers	MURA160	1 A, 600 V	SMA	MURA160T3G	Yes
D5	1	Switching Diode	MMSD4148	100 V	SOD-123	MMSD4148	Yes
IC1	1	Controller			SO-16	NCL30125B1	No
M1	1	MOSFET	CS1N60	0.8 A, 600 V	TO-252	CS1N60A4H	Yes
R1	1	Ceramic Resistor	NC	5%	0805	Standard	Yes
R2, R3	2	Ceramic Resistor	2.2 k $\Omega$	5%	0805	Standard	Yes
R4, R5	2	Ceramic Resistor	3 M $\Omega$	5%	0805	Standard	Yes
R6, R8	2	Ceramic Resistor	100 k $\Omega$	5%	0805	Standard	Yes
R7, R12	2	Ceramic Resistor	10 $\Omega$	5%	0805	Standard	Yes
R9	1	Ceramic Resistor	20 k $\Omega$	5%	0805	Standard	Yes
R10	1	Ceramic Resistor	560 $\Omega$	5%	0805	Standard	Yes
R11	1	NTC, Beta = 4190	100 k @ 25°C	5%	Through-hole	NTCLE100E3104JB0	Yes
R13	1	Ceramic Resistor	100 k $\Omega$	5%	0805	Standard	Yes
R14	1	Ceramic Resistor	47 k $\Omega$	5%	0805	Standard	Yes

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

The evaluation board/kit (research and development board/kit) (hereinafter the "board") is not a finished product and is as such not available for sale to consumers. The board is only intended for research, development, demonstration and evaluation purposes and should as such only be used in laboratory/development areas by persons with an engineering/technical training and familiar with the risks associated with handling electrical/mechanical components, systems and subsystems. This person assumes full responsibility/liability for proper and safe handling. Any other use, resale or redistribution for any other purpose is strictly prohibited.

The board is delivered "AS IS" and without warranty of any kind including, but not limited to, that the board is production-worthy, that the functions contained in the board will meet your requirements, or that the operation of the board will be uninterrupted or error free. ON Semiconductor expressly disclaims all warranties, express, implied or otherwise, including without limitation, warranties of fitness for a particular purpose and non-infringement of intellectual property rights.

ON Semiconductor reserves the right to make changes without further notice to any board.

You are responsible for determining whether the board will be suitable for your intended use or application or will achieve your intended results. Prior to using or distributing any systems that have been evaluated, designed or tested using the board, you agree to test and validate your design to confirm the functionality for your application. Any technical, applications or design information or advice, quality characterization, reliability data or other services provided by ON Semiconductor shall not constitute any representation or warranty by ON Semiconductor, and no additional obligations or liabilities shall arise from ON Semiconductor having provided such information or services.

The boards are not designed, intended, or authorized for use in life support systems, or any FDA Class 3 medical devices or medical devices with a similar or equivalent classification in a foreign jurisdiction, or any devices intended for implantation in the human body. Should you purchase or use the board for any such unintended or unauthorized application, you shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the board.

This evaluation board/kit does not fall within the scope of the European Union directives regarding electromagnetic compatibility, restricted substances (RoHS), recycling (WEEE), FCC, CE or UL, and may not meet the technical requirements of these or other related directives.

**FCC WARNING** – This evaluation board/kit is intended for use for engineering development, demonstration, or evaluation purposes only and is not considered by ON Semiconductor to be a finished end product fit for general consumer use. It may generate, use, or radiate radio frequency energy and has not been tested for compliance with the limits of computing devices pursuant to part 15 of FCC rules, which are designed to provide reasonable protection against radio frequency interference. Operation of this equipment may cause interference with radio communications, in which case the user shall be responsible, at its expense, to take whatever measures may be required to correct this interference.

ON Semiconductor does not convey any license under its patent rights nor the rights of others.

**LIMITATIONS OF LIABILITY:** ON Semiconductor shall not be liable for any special, consequential, incidental, indirect or punitive damages, including, but not limited to the costs of requalification, delay, loss of profits or goodwill, arising out of or in connection with the board, even if ON Semiconductor is advised of the possibility of such damages. In no event shall ON Semiconductor's aggregate liability from any obligation arising out of or in connection with the board, under any theory of liability, exceed the purchase price paid for the board, if any.

For more information and documentation, please visit [www.onsemi.com](http://www.onsemi.com).

---

## PUBLICATION ORDERING INFORMATION

### LITERATURE FULFILLMENT:

Email Requests to: [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

ON Semiconductor Website: [www.onsemi.com](http://www.onsemi.com)

### TECHNICAL SUPPORT

North American Technical Support:

Voice Mail: 1 800-282-9855 Toll Free USA/Canada

Phone: 011 421 33 790 2910

Europe, Middle East and Africa Technical Support:

Phone: 00421 33 790 2910

For additional information, please contact your local Sales Representative