

# ON Semiconductor

## Is Now

# onsemi™

To learn more about onsemi™, please visit our website at  
[www.onsemi.com](http://www.onsemi.com)

---

**onsemi** and **onsemi** and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi** product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner. Other names and brands may be claimed as the property of others.

# CAT6220

## 300 mA Adjustable Voltage LDO Regulator

### Description

The CAT6220 is a 300 mA CMOS low dropout regulator whose output voltage is user adjustable that provides fast response time during load current and line voltage changes.

With 1  $\mu\text{A}$  of shutdown current, an internal no-load operating current of only 10  $\mu\text{A}$ , and full-load operating current of 40  $\mu\text{A}$ , the CAT6220 is ideal for battery-operated devices with supply voltages from 2.3 V to 6.5 V.

The CAT6220 offers 1% initial accuracy and low dropout voltage, 270 mV typical at 300 mA. Stable operation is provided with a small value ceramic capacitor, reducing required board space and component cost.

Other features include current limit and thermal protection.

The device is available in the low profile (1 mm max height) 5-lead TSOT-23 and 6-pad 2 mm x 2 mm TDFN packages.

### Features

- Guaranteed 300 mA Output Current
- Low Dropout Voltage of 270 mV at 300 mA
- Stable with Ceramic Output Capacitor
- No-load Ground Current of 10  $\mu\text{A}$  Typical
- Full-load Ground Current of 40  $\mu\text{A}$  Typical
- $\pm 1.0\%$  Output Voltage Initial Accuracy
- $\pm 2.0\%$  Accuracy over Temperature
- “Zero” Current Shutdown Mode
- Current Limit and Thermal Protection
- 5-lead TSOT-23 and 6-pad TDFN Packages
- These Devices are Pb-Free, Halogen Free/BFR Free and are RoHS Compliant

### Applications

- Toys
- Consumer Electronics
- Cellular Phones
- Battery-powered Devices

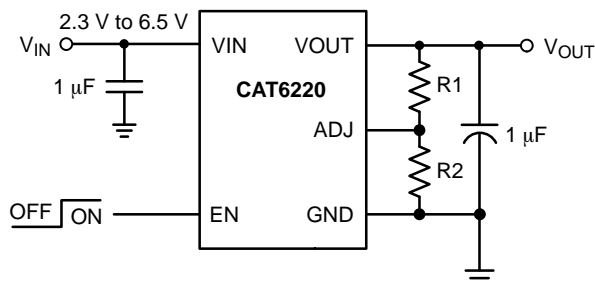


Figure 1. Typical Application Circuit



ON Semiconductor®

<http://onsemi.com>





TSOT-23  
TD SUFFIX  
CASE 419AE



TDFN-6  
VP5 SUFFIX  
CASE 511AH

### PIN CONNECTIONS



### ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 12 of this data sheet.

# CAT6220

**Table 1. PIN DESCRIPTIONS**

Pin Name	Package Pin #		Function
	TSOT	TDFN	
VIN	1	3	Supply voltage input.
GND	2	2	Ground reference. All GND pins must be grounded.
EN	3	1	Enable input (active high)
ADJ	4	6	Digital programming input
NIC	---	5	No Internal Connection. A voltage or signal applied to this pin will have no effect upon device operation.
VOUT	5	4	Output Voltage Adjustment.
GND	---	PAD	Center pad or tab; for heat sinking


## Pin Function

**VIN** is the supply pin for the LDO. A small 1 μF ceramic bypass capacitor is required between the V<sub>IN</sub> pin and ground near the device. When using longer connections to the power supply, C<sub>IN</sub> value can be increased without limit. The operating input voltage range is from 2.3 V to 6.5 V.

**EN** is the enable control logic (active high) for the regulator output. Enable is a high impedance input and must not be left unconnected. Floating EN will result in unpredictable action at VOUT.

**VOUT** is the LDO regulator's output. Output voltage is set by two external resistors arranged as a voltage divider between VOUT and Ground. The center point of the divider is connected to ADJ as shown in Figure 2. The minimum recommended current through resistors is 5 μA. The ratio of the resistors is set by the formula:

$$V_{OUT} = 1.24 V \left( 1 + \frac{R_1}{R_2} \right)$$

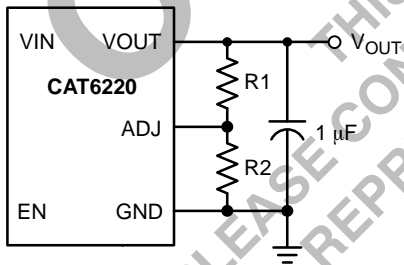

**Figure 2. R1 and R2 Set CAT6220's Output Voltage**

A small 1 μF ceramic bypass capacitor is required between the VOUT pin and ground. For better transient response, its value can be increased to 2.2 μF. This capacitor should be located near the device.

**GND** is the ground reference for the LDO. This pin must be connected to the system ground line or the ground plane of the PCB.

The backside center pad of the TDFN package is internally connected to the GND pin. Any PCB connection to this pad must be either floating or at GND potential.

**ADJ** is the LDO's voltage control input. This pin is connected to the center of the resistor voltage divider R1, R2. A 10 pF capacitor connected in parallel with R1 will improve the transient load regulation for VOUT ≤ 2 V.

## Thermal and Short Circuit Protection

CAT6220 is equipped with thermal protection and over-current limiting circuitry.

In the event of a short circuit CAT6220 will limit its output current to approximately 400 mA. If the short circuit persists CAT6220's internal temperature will rise and if the chip's temperature reaches 140°C CAT6220 will shut off all current to the load which protects the system and allows the LDO to cool down. When the LDO's internal temperature drops below 130°C the LDO automatically turns ON again. If the short circuit is still present another thermal cycle will ensue. This will continue until either the short circuit is removed or the Enable pin is taken LOW.

For the TSOT23-5 package, a continuous 300 mA output current may turn-on the thermal protection. If this happens the LDO will respond by shutting off power to the load and thermal cycling will begin.

# CAT6220

**Table 2. ABSOLUTE MAXIMUM RATINGS**

Parameter	Rating	Unit
$V_{IN}$	0 to 7	V
$V_{EN}, V_{OUT}$	-0.3 to $V_{IN} + 0.3$	V
Junction Temperature, $T_J$	+150	°C
Power Dissipation, $P_D$	Internally Limited (Note 1)	mW
Storage Temperature Range, $T_S$	-65 to +150	°C
Lead Temperature (soldering, 5 sec.)	260	°C
ESD Rating (Human Body Model)	2	kV
ESD Rating (Machine Model)	200	V

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

1. The maximum allowable power dissipation at any  $T_A$  (ambient temperature) is  $P_{Dmax} = (T_{Jmax} - T_A) / \theta_{JA}$ . Exceeding the maximum allowable power dissipation will result in excessive die temperature, and the regulator will go into thermal shutdown.

**Table 3. RECOMMENDED OPERATING CONDITIONS** (Note 2)

Parameter	Range	Unit
$V_{IN}$	2.3 to 6.5	V
$I_{OUT}$	0.005 to 300	mA
$V_{EN}$	0 to $V_{IN}$	V
Junction Temperature Range, $T_J$	-40 to +140	°C
Package Thermal Resistance (TSOT23-5), $\theta_{JA}$	280	°C/W
Package Thermal Resistance (TDFN-6), $\theta_{JA}$	160	°C/W

2. The device is not guaranteed to work outside its operating rating.

# CAT6220

**Table 4. ELECTRICAL OPERATING CHARACTERISTICS** (Note 3) ( $V_{IN} = V_{OUT} + 1.0$  V,  $V_{EN} = \text{High}$ ,  $I_{OUT} = 100$   $\mu\text{A}$ ,  $C_{IN} = 1$   $\mu\text{F}$ ,  $C_{OUT} = 1$   $\mu\text{F}$ , ambient temperature of 25°C (over recommended operating conditions unless specified otherwise). **Bold numbers** apply for the entire junction temperature range.)

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
$V_{ADJ}$	Adjustable Voltage	$I_{OUT} = 100$ $\mu\text{A}$		1.24		V
$V_{ADJ}$	Adjustable Voltage Accuracy	Initial accuracy	-1.5		+1.5	%
			<b>-2.5</b>		<b>+2.5</b>	
$I_{ADJ}$	ADJ pin Input Current			1	<b>50</b>	nA
$TC_{OUT}$	Output Voltage Temp. Coefficient			40		ppm/°C
$V_{R-LINE}$	Line Regulation	$V_{IN} = V_{OUT} + 1.0$ V to 6.5 V	-0.2	$\pm 0.1$	+0.2	%V
			<b>-0.35</b>		<b>+0.35</b>	
$V_{R-LOAD}$	Load Regulation	$I_{OUT} = 100$ $\mu\text{A}$ to 300 mA		0.9	1.5	%
					<b>2.2</b>	
$V_{DROP}$	Dropout Voltage (Note 4)	$I_{OUT} = 300$ mA		270	350	mV
					<b>500</b>	
$I_{GND}$	Ground Current	$I_{OUT} = 5$ $\mu\text{A}$		10	15	$\mu\text{A}$
					<b>20</b>	
$I_{GND-SD}$	Shutdown Ground Current	$V_{EN} < 0.4$ V		40	<b>100</b>	$\mu\text{A}$
PSRR	Power Supply Rejection Ratio	$f = 100$ Hz		62		dB
			$f = 1$ kHz		48	
$I_{SC}$	Output short circuit current limit	$V_{OUT} = 0$ V		500	<b>700</b>	mA
$T_{ON}$	Turn-On Time			150		$\mu\text{s}$
$e_N$	Output Noise Voltage	BW = 10 Hz to 100 kHz, $V_{OUT} = 1.8$ V, $I_{OUT} = 10$ mA		150		$\mu\text{V}_{rms}$
$R_{OUT-SH}$	Shutdown Switch Resistance			250		$\Omega$
ESR	$C_{OUT}$ equivalent series resistance		5		500	m $\Omega$

## DIGITAL INPUT

$V_{HI}$	Logic High Level	$V_{IN} = 2.3$ to 6.5 V	<b>1.8</b>			V
		$V_{IN} = 2.3$ to 6.5 V, 0°C to +125°C junction temperature	1.6			
$V_{LO}$	Logic Low Level	$V_{IN} = 2.3$ to 6.5 V			<b>0.4</b>	V
$I_{IN}$	Input Current	$V_{LOGIC} = 0.4$ V		0.15	1	$\mu\text{A}$
		$V_{LOGIC} = V_{IN}$		1.5	4	

## THERMAL PROTECTION

$T_{SD}$	Thermal Shutdown			140		°C
$T_{HYS}$	Thermal Hysteresis			10		°C

3. Specification for 2.5 V output version unless specified otherwise.

4. Dropout voltage is defined as the input-to-output differential at which the output voltage drops 2% below its nominal value measured at 1 V differential. During test, the input voltage stays always above the minimum 2.3 V.

# CAT6220

## TYPICAL CHARACTERISTICS

( $V_{IN} = 3.5\text{ V}$ ,  $R1 = R2 = 250\text{ K}\Omega$ ,  $I_{OUT} = 100\ \mu\text{A}$ ,  $C_{IN} = 1\ \mu\text{F}$ ,  $C_{OUT} = 1\ \mu\text{F}$ ,  $T_A = 25^\circ\text{C}$  unless otherwise specified.)

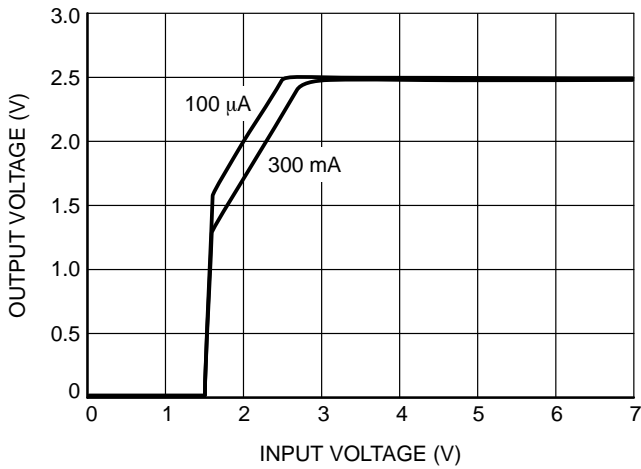


Figure 3. Dropout Characteristics

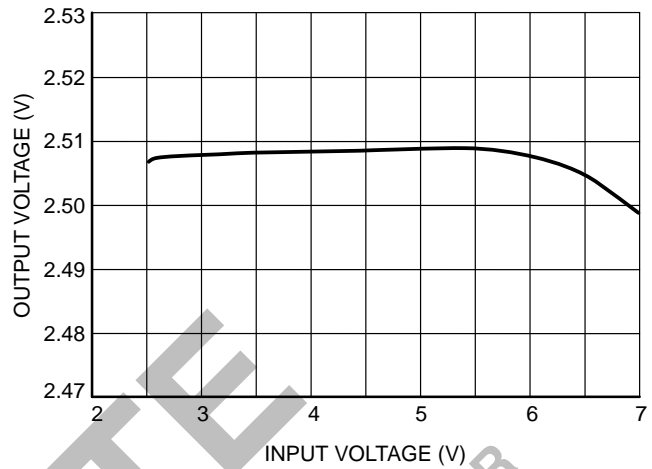


Figure 4. Line Regulation

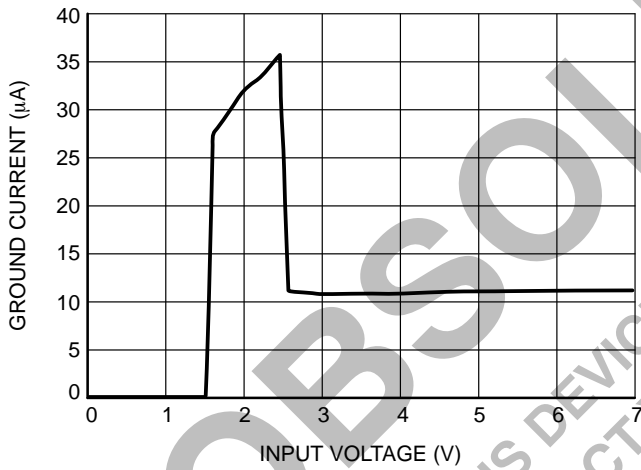


Figure 5. Ground Current vs. Input Voltage

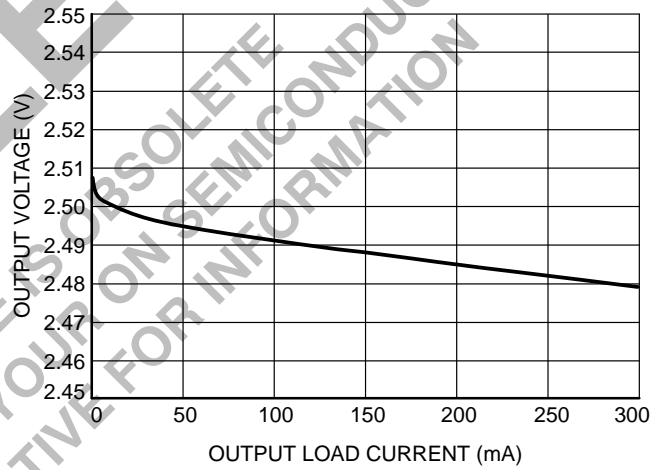


Figure 6. Load Regulation

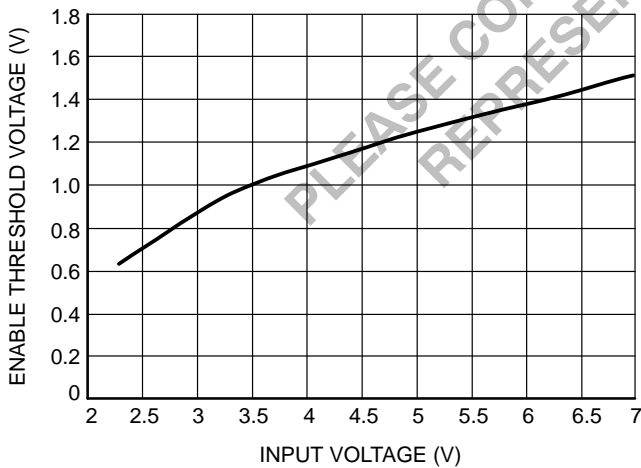


Figure 7. Enable Threshold vs. Input Voltage


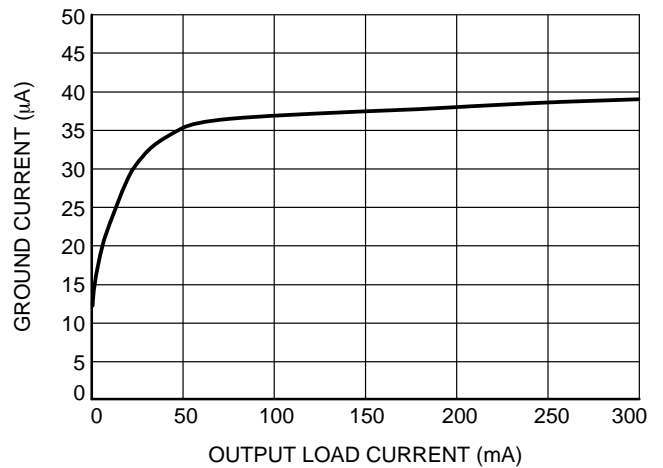


Figure 8. Ground Current vs. Load Current


# CAT6220

## TYPICAL CHARACTERISTICS


( $V_{IN} = 3.5\text{ V}$ ,  $R_1 = R_2 = 250\text{ K}\Omega$ ,  $I_{OUT} = 100\text{ }\mu\text{A}$ ,  $C_{IN} = 1\text{ }\mu\text{F}$ ,  $C_{OUT} = 1\text{ }\mu\text{F}$ ,  $T_A = 25^\circ\text{C}$  unless otherwise specified.)

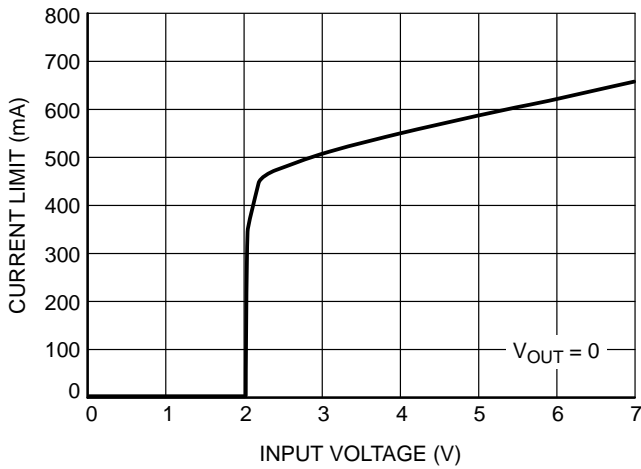


**Figure 9. Output Short-circuit Current vs. Input Voltage**

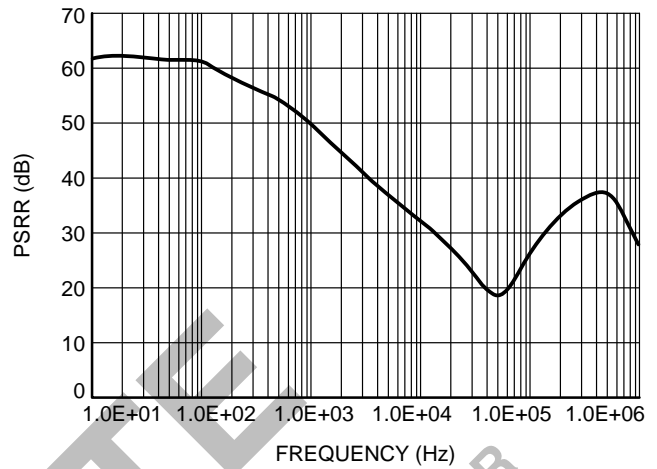


**Figure 10. PSRR vs. Frequency (10 mA Load)**

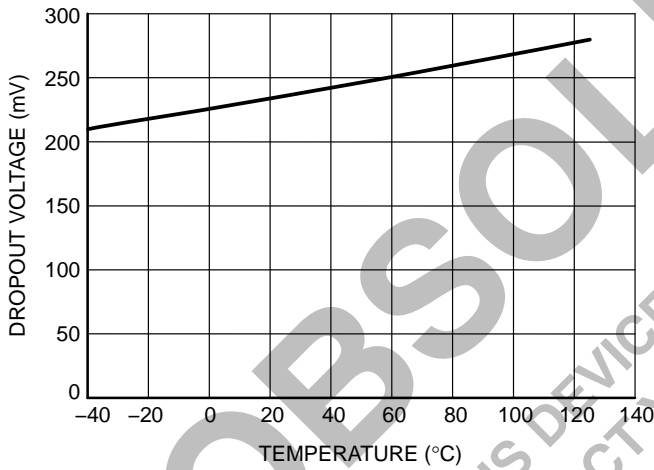


**Figure 11. Dropout vs. Temperature (300 mA Load)**

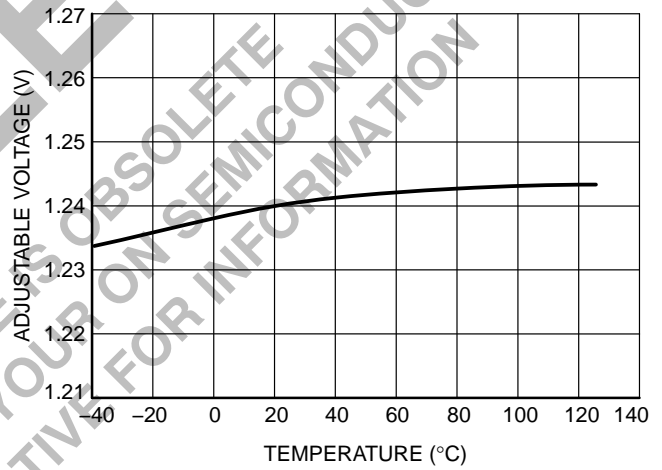

**Figure 12. Adjustable Voltage vs. Temperature (100  $\mu\text{A}$  Load)**

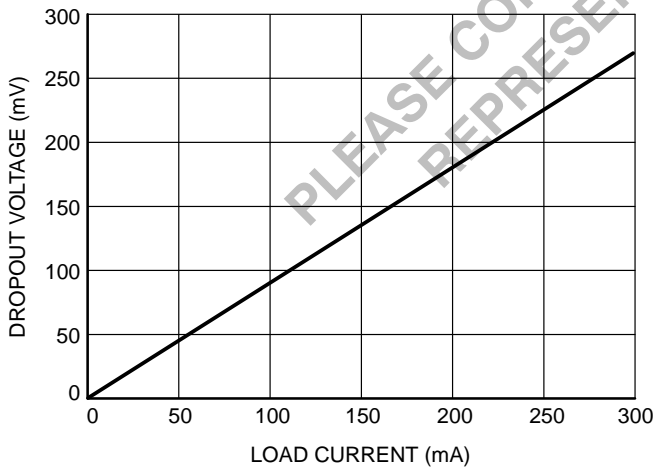

**Figure 13. Dropout vs. Load Current**

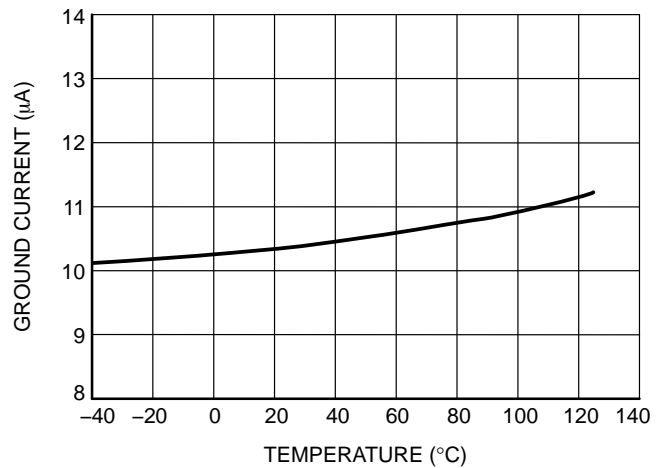

**Figure 14. Ground Current vs. Temperature (5  $\mu\text{A}$  Load)**

# CAT6220

## TRANSIENT CHARACTERISTICS

( $V_{IN} = 3.5\text{ V}$ ,  $R1 = R2 = 250\text{ K}\Omega$ ,  $I_{OUT} = 100\text{ }\mu\text{A}$ ,  $C_{IN} = 1\text{ }\mu\text{F}$ ,  $C_{OUT} = 1\text{ }\mu\text{F}$ ,  $T_A = 25^\circ\text{C}$  unless otherwise specified.)

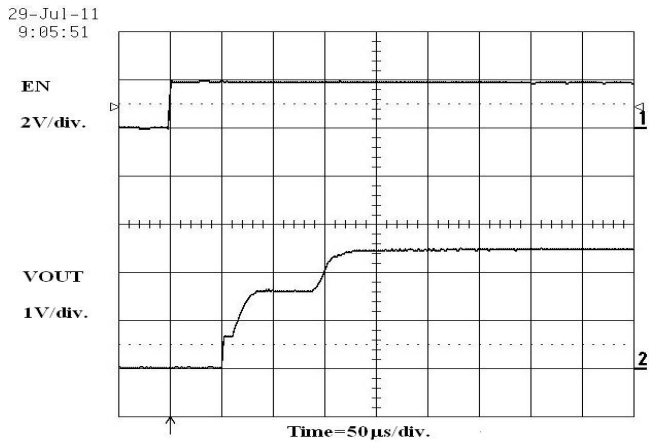


Figure 15. Enable Turn-On (100  $\mu\text{A}$  Load)

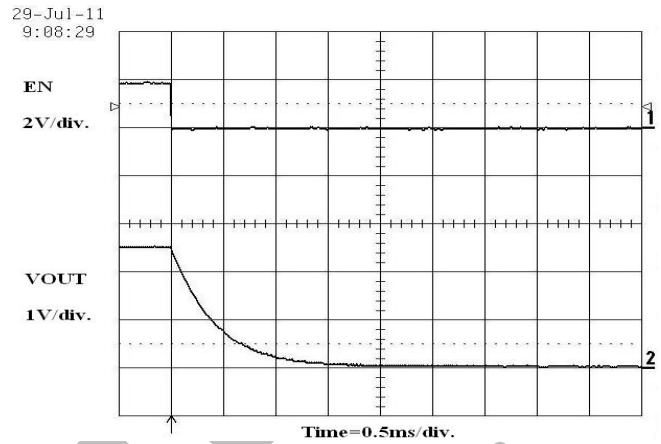


Figure 16. Enable Turn-Off (100  $\mu\text{A}$  Load)

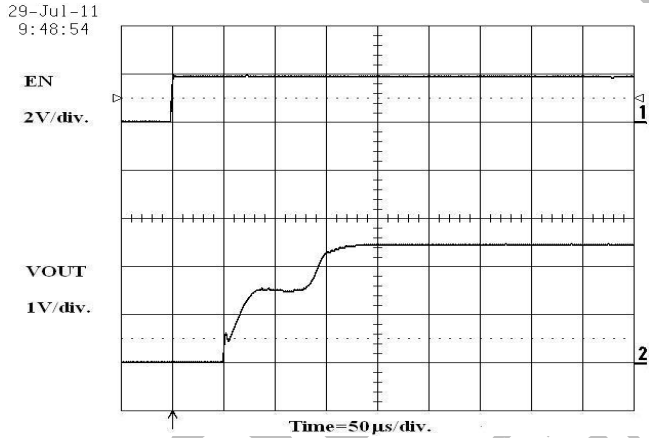


Figure 17. Enable Turn-On (300 mA Load)

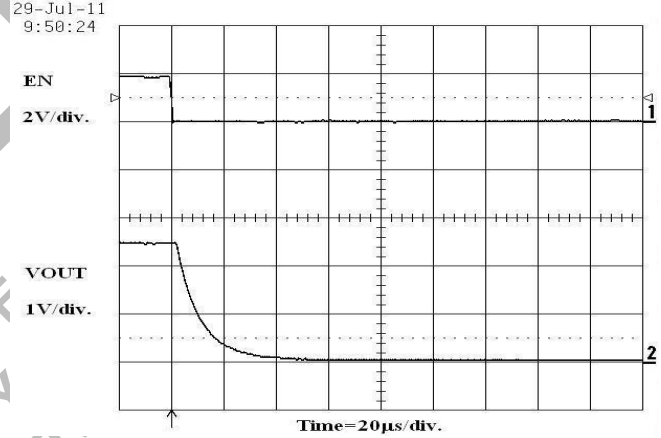


Figure 18. Enable Turn-Off (300 mA Load)

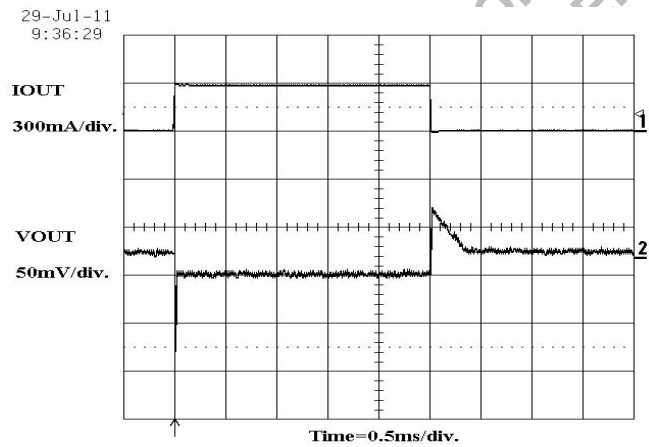


Figure 19. Load Transient Response (0.1 mA to 300 mA)

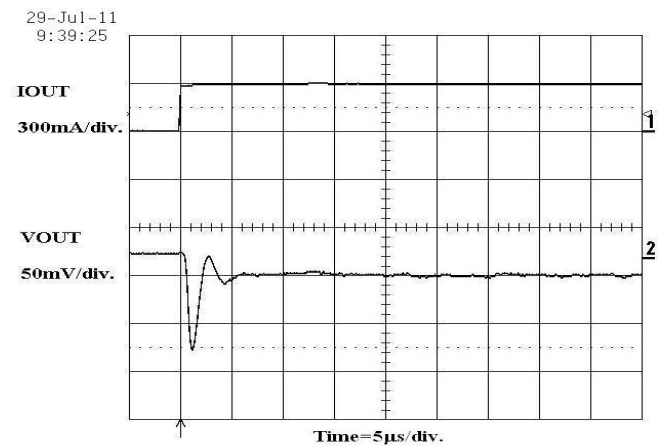


Figure 20. Load Transient Response - Detail



# CAT6220

## TRANSIENT CHARACTERISTICS

( $V_{IN} = 3.5\text{ V}$ ,  $R_1 = R_2 = 250\text{ K}\Omega$ ,  $I_{OUT} = 100\text{ }\mu\text{A}$ ,  $C_{IN} = 1\text{ }\mu\text{F}$ ,  $C_{OUT} = 1\text{ }\mu\text{F}$ ,  $T_A = 25^\circ\text{C}$  unless otherwise specified.)

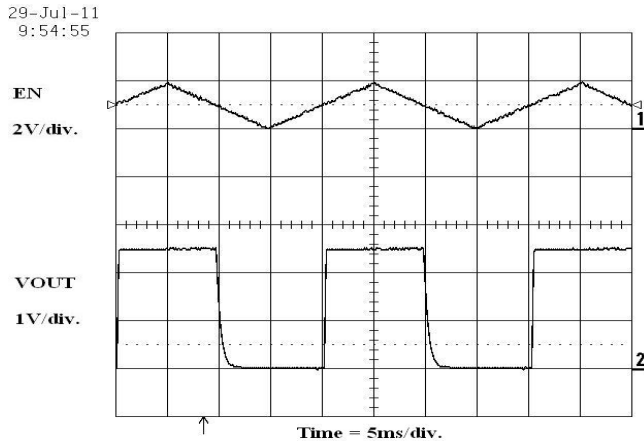


Figure 21. Slow-Enable Operation (100  $\mu\text{A}$  Load)

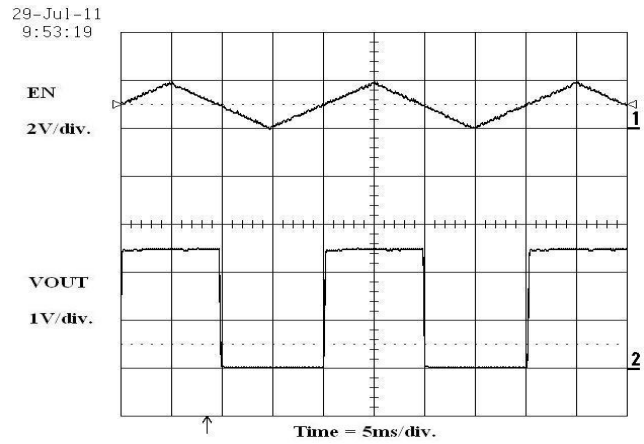


Figure 22. Slow-Enable Operation (300 mA Load)

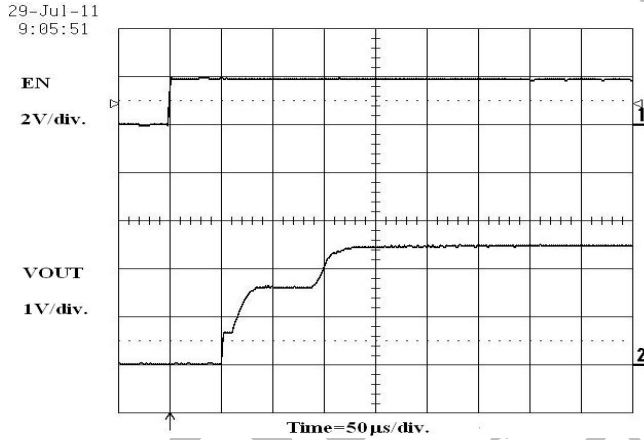


Figure 23. Enable Turn-On at  $V_{IN} = 4.5\text{ V}$  (100  $\mu\text{A}$  Load)

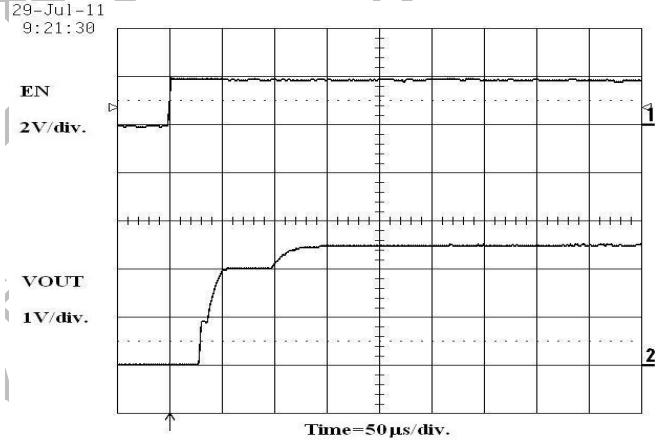


Figure 24. Enable Turn-On at  $V_{IN} = 5.5\text{ V}$  (100  $\mu\text{A}$  Load)


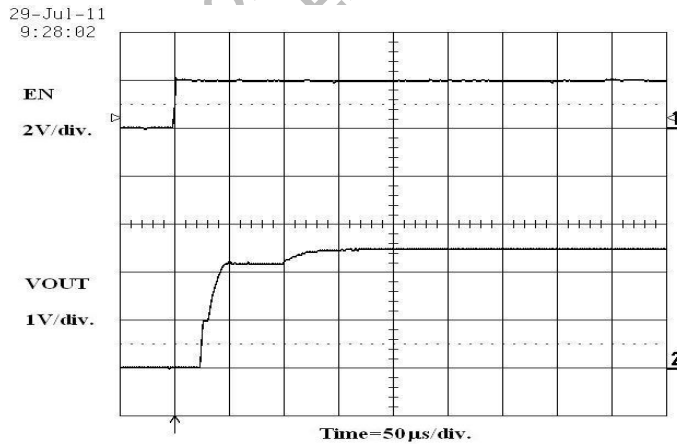


Figure 25. Enable Turn-On at  $V_{IN} = 6.5\text{ V}$  (100  $\mu\text{A}$  Load)


# CAT6220

**Table 5. THERMAL PERFORMANCE**

Package	Symbol	Test Conditions	Min	Typ	Max	Unit
<b>PACKAGE THERMAL CONDUCTIVITY COMPARISON</b>						
TSOT-23-5	$\theta_{JA}$	1 oz Copper Thickness, 100 mm <sup>2</sup>		280		°C/W
	$\theta_{JC}$			68		
TDFN-6	$\theta_{JA}$	1 oz Copper Thickness, 100 mm <sup>2</sup>		160		°C/W
	$\theta_{JC}$			35		

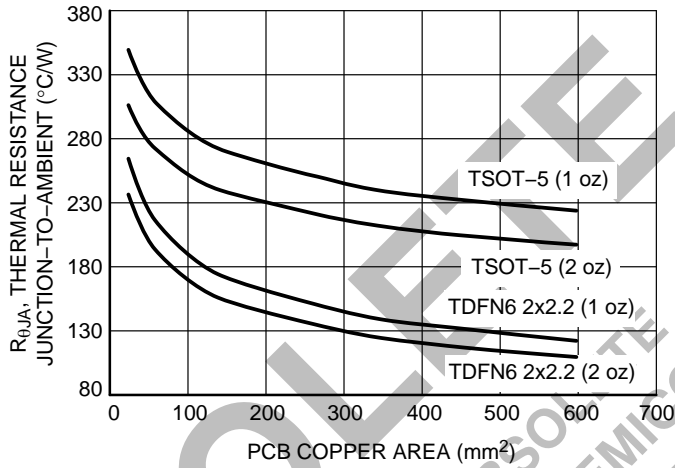

**Figure 26.  $R_{\theta JA}$  vs. PCB Copper Area**

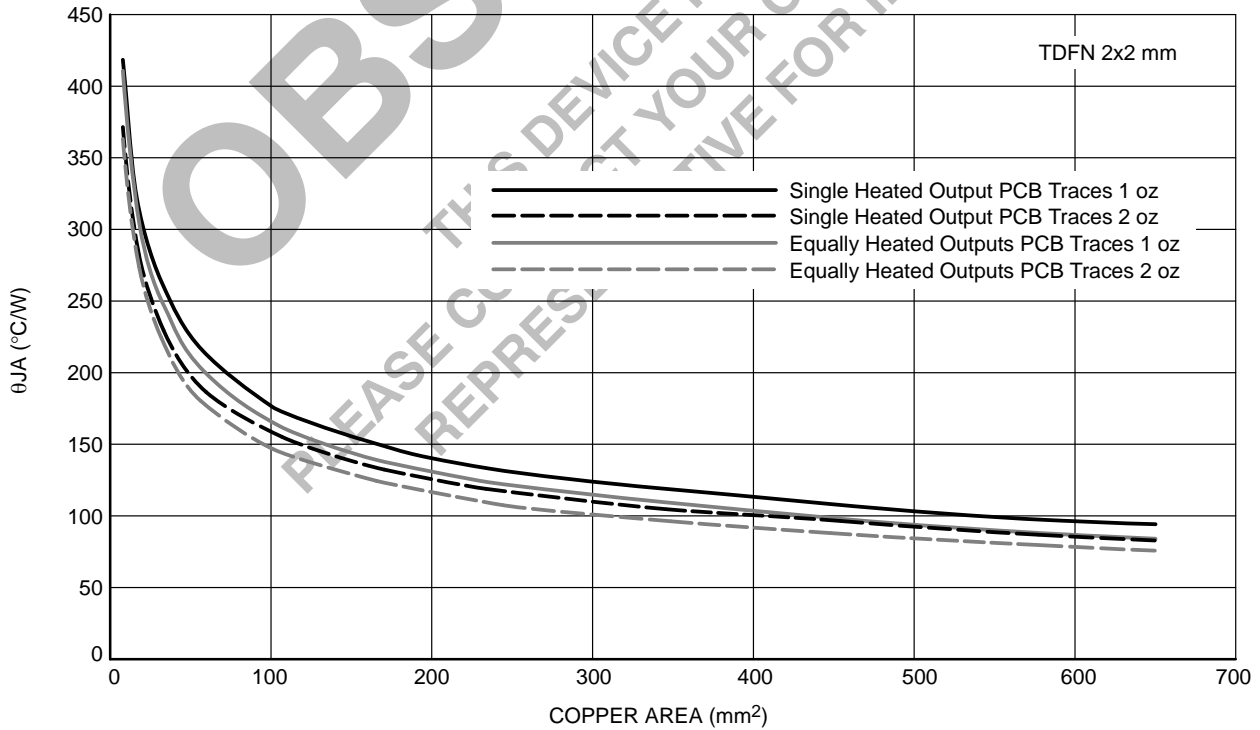


**Figure 27. Thermal Characteristic as a Function of Copper Area on the PCB**

# CAT6220


## PACKAGE DIMENSIONS

TSOT-23, 5 LEAD  
CASE 419AE-01  
ISSUE O

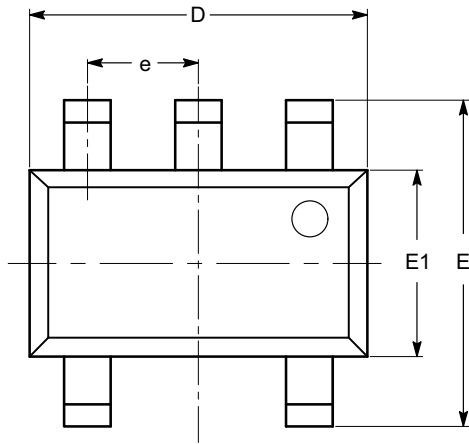


TOP VIEW

SYMBOL	MIN	NOM	MAX
A			1.00
A1	0.01	0.05	0.10
A2	0.80	0.87	0.90
b	0.30		0.45
c	0.12	0.15	0.20
D	2.90 BSC		
E	2.80 BSC		
E1	1.60 BSC		
e	0.95 TYP		
L	0.30	0.40	0.50
L1	0.60 REF		
L2	0.25 BSC		
$\theta$	0°		8°

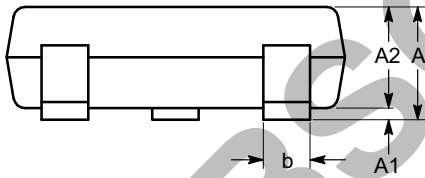

SIDE VIEW

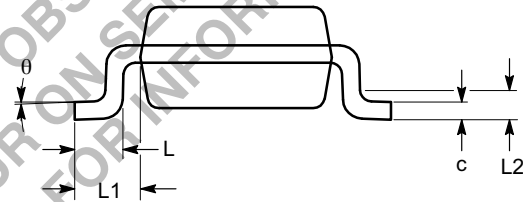

END VIEW


**Notes:**

- (1) All dimensions are in millimeters. Angles in degrees.
- (2) Complies with JEDEC MO-193.


# CAT6220

## PACKAGE DIMENSIONS

TDFN6, 2x2  
CASE 511AH-01  
ISSUE A

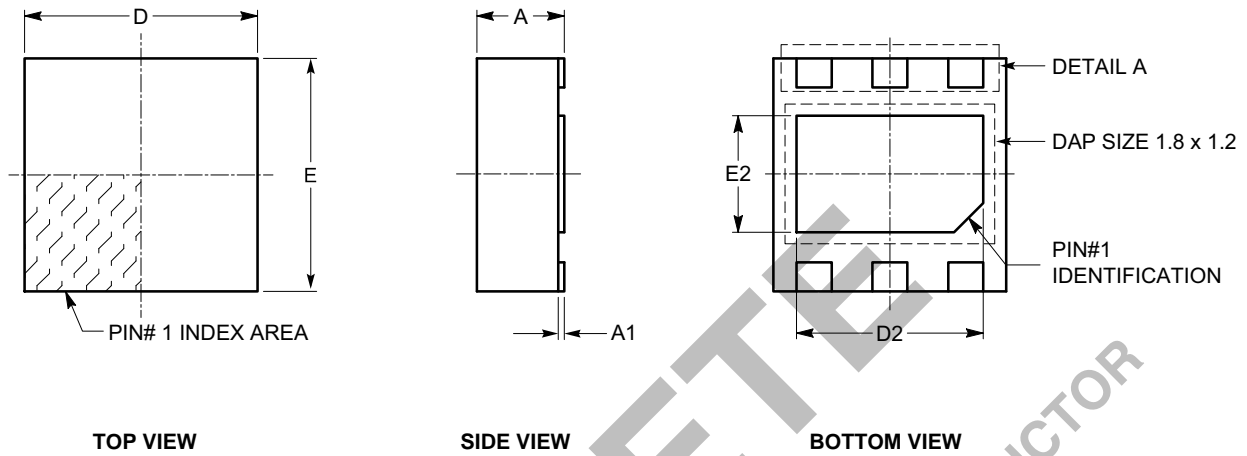

SYMBOL	MIN	NOM	MAX
A	0.70	0.75	0.80
A1	0.00	0.02	0.05
A3	0.20 REF		
b	0.25	0.30	0.35
D	1.90	2.00	2.10
D2	1.50	1.60	1.70
E	1.90	2.00	2.10
E2	0.90	1.00	1.10
e	0.65 TYP		
L	0.15	0.25	0.35

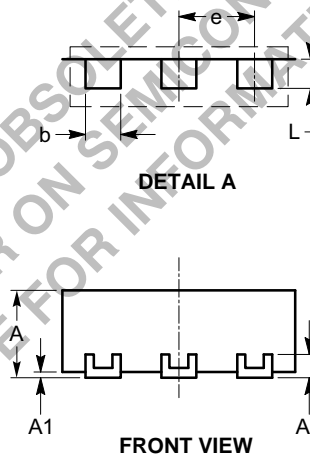

**Notes:**

- (1) All dimensions are in millimeters.
- (2) Complies with JEDEC standard MO-229.


# CAT6220

## ORDERING INFORMATION

Device Order Number	Specific Device Marking	Package Type	Temperature Range	Lead Finish	Shipping (Note 7)
CAT6220TDI-GT3	X2	TSOT-23-5	I = Industrial (-40°C to +85°C)	NiPdAu	Tape & Reel, 3,000 Units / Reel
CAT6220VP5I-GT3	AK	TDFN-6	I = Industrial (-40°C to +85°C)	NiPdAu	Tape & Reel, 3,000 Units / Reel

- All packages are RoHS-compliant (Lead-free, Halogen-free).
- The standard lead finish is NiPdAu pre-plated (PPF) lead frames.
- For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.
- For detailed information and a breakdown of device nomenclature and numbering systems, please see the ON Semiconductor Device Nomenclature document, TND310/D, available at [www.onsemi.com](http://www.onsemi.com)

**OBSOLETE**  
THIS DEVICE IS OBSOLETE  
PLEASE CONTACT YOUR ON SEMICONDUCTOR  
REPRESENTATIVE FOR INFORMATION

ON Semiconductor and  are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## PUBLICATION ORDERING INFORMATION

### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor  
P.O. Box 5163, Denver, Colorado 80217 USA  
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
Email: [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

**N. American Technical Support:** 800-282-9855 Toll Free  
USA/Canada  
**Europe, Middle East and Africa Technical Support:**  
Phone: 421 33 790 2910  
**Japan Customer Focus Center**  
Phone: 81-3-5817-1050

**ON Semiconductor Website:** [www.onsemi.com](http://www.onsemi.com)

**Order Literature:** <http://www.onsemi.com/orderlit>

For additional information, please contact your local Sales Representative