

# **Dual NPN General Purpose Amplifier Transistor**

# EMX1DXV6T1G, EMX1DXV6T5G

This NPN transistor is designed for general purpose amplifier applications. This device is housed in the SOT-563 package which is designed for low power surface mount applications, where board space is at a premium.

### **Features**

- Reduces Board Space
- High h<sub>FE</sub>, 210-460 (Typical)
- Low V<sub>CE(sat)</sub>, < 0.5 V
- NSV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable
- These Devices are Pb–Free, Halogen Free/BFR Free and are RoHS Compliant

## **MAXIMUM RATINGS** $(T_A = 25^{\circ}C)$

Rating	Symbol	Value	Unit
Collector-Base Voltage	V <sub>(BR)CBO</sub>	60	Vdc
Collector-Emitter Voltage	V <sub>(BR)CEO</sub>	50	Vdc
Emitter-Base Voltage	V <sub>(BR)EBO</sub>	7.0	Vdc
Collector Current - Continuous	I <sub>C</sub>	100	mAdc

## THERMAL CHARACTERISTICS


Characteristic (One Junction Heated)	Symbol	Max	Unit
Total Device Dissipation  T <sub>A</sub> = 25°C  Derate above 25°C	P <sub>D</sub>	357 (Note 1) 2.9 (Note 1)	mW mW/°C
Thermal Resistance – Junction-to-Ambient	$R_{ heta JA}$	350 (Note 1)	°C/W
Characteristic (Both Junctions Heated)	Symbol	Max	Unit
Total Device Dissipation $T_{\Delta} = 25^{\circ}C$	P <sub>D</sub>	500 (Note 1)	mW
Derate above 25°C		4.0 (Note 1)	mw/°C
73	$R_{ heta JA}$	` ,	

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1

1. FR-4 @ Minimum Pad

## DUAL NPN GENERAL PURPOSE AMPLIFIER TRANSISTORS SURFACE MOUNT





SOT-563 CASE 463A STYLE 1

#### **MARKING DIAGRAM**



3X = Specific Device Code

M = Month Code

= Pb-Free Package

(Note: Microdot may be in either location)

## **ORDERING INFORMATION**

See detailed ordering and shipping information in the package dimensions section on page 2 of this data sheet.

## EMX1DXV6T1G, EMX1DXV6T5G

## **ELECTRICAL CHARACTERISTICS** (T<sub>A</sub> = 25°C)

Characteristic	Symbol	Min	Тур	Max	Unit
Collector-Base Breakdown Voltage ( $I_C = 50 \mu Adc, I_E = 0$ )	V <sub>(BR)CBO</sub>	60	-	-	Vdc
Collector-Emitter Breakdown Voltage (I <sub>C</sub> = 1.0 mAdc, I <sub>B</sub> = 0)	V <sub>(BR)CEO</sub>	50	-	-	Vdc
Emitter-Base Breakdown Voltage ( $I_E = 50 \mu Adc, I_E = 0$ )	V <sub>(BR)EBO</sub>	7.0	_	-	Vdc
Collector-Base Cutoff Current $(V_{CB} = 60 \text{ Vdc}, I_E = 0)$	I <sub>CBO</sub>	-	_	0.5	μΑ
Emitter-Base Cutoff Current (V <sub>EB</sub> = 7.0 Vdc, I <sub>B</sub> = 0)	I <sub>EBO</sub>	-	_	0.5	μΑ
Collector-Emitter Saturation Voltage (Note 2) $(I_C = 50 \text{ mAdc}, I_B = 5.0 \text{ mAdc})$	V <sub>CE(sat)</sub>	-	_	0.4	Vdc
DC Current Gain (Note 3) ( $V_{CE} = 6.0 \text{ Vdc}, I_{C} = 1.0 \text{ mAdc}$ )	h <sub>FE</sub>	120	_	560	-
Transition Frequency ( $V_{CE} = 12 \text{ Vdc}, I_{C} = 2.0 \text{ mAdc}, f = 30 \text{ MHz}$ )	f <sub>T</sub>	-	180	-	MHz
Output Capacitance (V <sub>CB</sub> = 12 Vdc, I <sub>C</sub> = 0 Adc, f = 1 MHz)	C <sub>OB</sub>	-	2.0	-	pF

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

2. Device mounted on a FR-4 glass epoxy printed circuit board using the minimum recommended footprint.

## **ORDERING INFORMATION**


Device	Package	Shipping <sup>†</sup>
EMX1DXV6T1G, NSVEMX1DXV6T1G	SOT-563 (Pb-Free)	4000 Units / Tape & Reel
EMX1DXV6T5G	SOT-563 (Pb-Free)	8000 Units / Tape & Reel

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

<sup>3.</sup> Pulse Test: Pulse Width  $\leq$  300  $\mu$ s, D.C.  $\leq$  2%.

## EMX1DXV6T1G, EMX1DXV6T5G

## TYPICAL ELECTRICAL CHARACTERISTICS

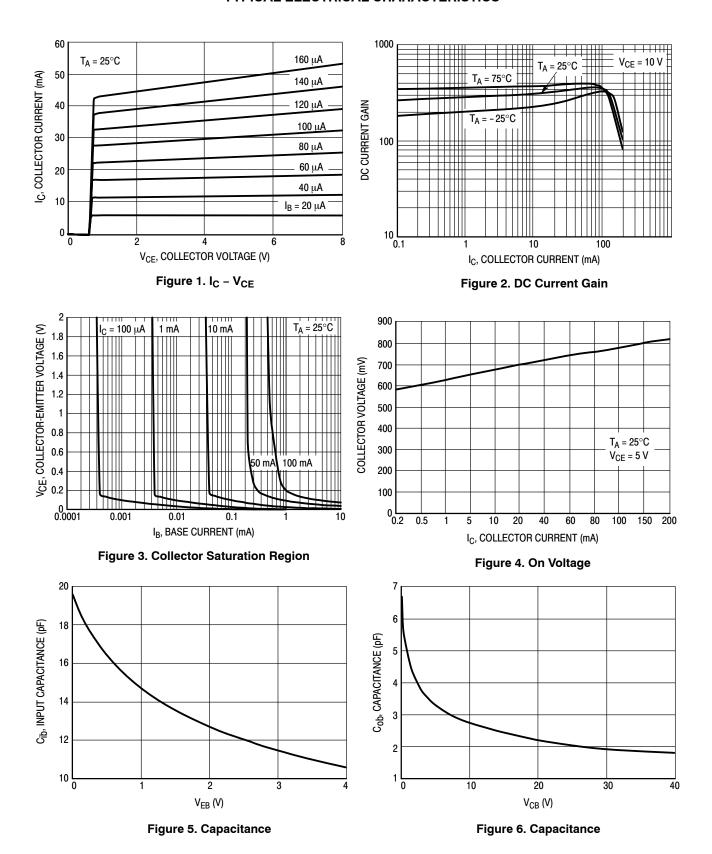







## SOT-563-6 1.60x1.20x0.55, 0.50P CASE 463A **ISSUE J**

**DATE 15 FEB 2024** 


#### NOTES:

- DIMENSIONING AND TOLERANCING CONFORM TO ASME Y14.5-2018.
- ALL DIMENSION ARE IN MILLIMETERS.
- MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH THICKNESS. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF BASE MATERIAL.

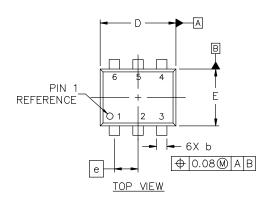



DIM	MILLIMETERS		
וועם	MIN.	N□M.	MAX.
Α	0.50	0.55	0.60
b	0.17	0.22	0.27
C	0.08	0.13	0.18
D	1.50	1.60	1.70
E	1.10	1.20	1.30
е	0.50 BSC		
Н	1.50	1.60	1.70
L	0.10	0.20	0.30



STYLE 1:	STYLE 2:	STYLE 3:
PIN 1. EMITTER 1	PIN 1. EMITTER 1	PIN 1. CATHODE 1
2. BASE 1	2. EMITTER 2	2. CATHODE 1
3. COLLECTOR 2	3. BASE 2	3. ANODE/ANODE 2
4. EMITTER 2	4. COLLECTOR 2	4. CATHODE 2
5. BASE 2	5. BASE 1	5. CATHODE 2
6. COLLECTOR 1	6. COLLECTOR 1	6. ANODE/ANODE 1

STYLE 6: PIN 1. CATHODE 2. ANODE

3. CATHODE

4. CATHODE 5. CATHODE

CATHODE

RECOMMENDED	MOLINITING	FOOTPRINT*
KECOMIMENDED	MOONTING	LOO INKINI.

FOR ADDITIONAL INFORMATION ON OUR Pb-FREE STRATEGY AND SOLDERING DETAILS, PLEASE DOWNLOAD THE ON SEMICONDUCTOR SOLDERING AND MOUNTING TECHNIQUES REFERENCE MANUAL, SOLDERRM/D.

STYLE 7: PIN 1. CATHODE 2. ANODE 3. CATHODE 4. CATHODE 5. ANODE 6. CATHODE	STYLE 8: PIN 1. DRAIN 2. DRAIN 3. GATE 4. SUURCE 5. DRAIN 6. DRAIN	STYLE 9: PIN 1. SOURCE 1 2. GATE 1 3. DRAIN 2 4. SOURCE 2 5. GATE 2 6. DRAIN 1
--	--	--

STYLE 5

PIN 1. CATHODE

2. CATHODE 3. ANDDE 4. ANDDE 5. CATHODE

## **GENERIC MARKING DIAGRAM\***



XX = Specific Device Code M = Month Code

= Pb-Free Package

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "=", may or may not be present. Some products may not follow the Generic Marking.

PIN 1. CATHODE 1	PIN 1. EMITTER 2
2. N/C	2. BASE 2
3. CATHODE 2	3. COLLECTOR 1
4. ANODE 2	4. EMITTER 1
5. N/C	5. BASE 1
6. ANDDE 1	6. COLLECTOR 2

STYLE 11:

STYLE 4: PIN 1. COLLECTOR

3. BASE 4. EMITTER 5. COLLECTOR

STYLE 10:

2. COLLECTOR

COLLECTOR

Electronic versions are uncontrolled except when accessed directly from the Document Repository. **DOCUMENT NUMBER:** 98AON11126D Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.

**DESCRIPTION:** SOT-563-6 1.60x1.20x0.55, 0.50P **PAGE 1 OF 1** 

onsemi and ONSEMI are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

onsemi, Onsemi, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at <a href="www.onsemi.com/site/pdf/Patent-Marking.pdf">www.onsemi.com/site/pdf/Patent-Marking.pdf</a>. Onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA class 3 medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase

### ADDITIONAL INFORMATION

**TECHNICAL PUBLICATIONS:** 

 $\textbf{Technical Library:} \ \underline{www.onsemi.com/design/resources/technical-documentation}$ 

onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at

www.onsemi.com/support/sales