ON Semiconductor

Is Now

Onsemi

To learn more about onsemi[™], please visit our website at <u>www.onsemi.com</u>

onsemi and ONSEMI. and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product factures, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and asfety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or by customer's technical experts. onsemi products and actal performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use onsemi products for any such unintended or unauthorized application, Buyer shall indemnify and hold onsemi and its officers, employees, subsidiari

September 1999



ON Semiconductor®

FDS9431A

P-Channel 2.5V Specified MOSFET

General Description


This P-Channel 2.5V specified MOSFET is produced using ON Semiconductor's proprietary, high cell density, DMOS technology. This very high density process has been especially tailored to minimize onstate resistance and yet maintain superior switching performance.


Applications

- DC/DC converter
- Power management
- · Load switch
- Battery protection

Features

- -3.5 A, -20 V. $R_{DS(ON)} = 0.130 \ \Omega \ @ V_{GS} = -4.5 \ V$ $R_{DS(ON)} = 0.180 \ \Omega \ @ V_{GS} = -2.5 \ V.$
- Fast switching speed.
- High density cell design for extremely low R_{DS(ON)}.
- High power and current handling capability.





Absolute Maximum Ratings T_A=25°C unless otherwise noted

Symbol	Parameter		Ratings	Units
V _{DSS}	Drain-Source Voltage		-20	V
V _{GSS}	Gate-Source Voltage		±8	V
ID	Drain Current - Continuous	(Note 1a)	-3.5	A
	- Pulsed		-18	
P _D	Power Dissipation for Single Operation	(Note 1a)	2.5	W
		(Note 1b)	1.2	
		(Note 1c)	1.0	
T _J , T _{stg}	Operating and Storage Junction Temperat	ure Range	-55 to +150	°C


Thermal Characteristics

R _{θJA}	Thermal Resistance, Junction-to-Ambient	(Note 1a)	50	°C/W
$R_{\theta JC}$	Thermal Resistance, Junction-to-Case	(Note 1)	25	°C/W


Package Marking and Ordering Information


Device Marking	Device	Reel Size	Tape width	Quantity
FDS9431A	FDS9431A	13"	12mm	2500 units

eteristics rain-Source Breakdown Voltage reakdown Voltage Temperature oefficient ero Gate Voltage Drain Current ate-Body Leakage Current, orward ate-Body Leakage Current, everse	$\label{eq:VGS} \begin{array}{l} V_{GS} = 0 \ V, \ I_D = -250 \ \mu A \\ \\ I_D = -250 \ \mu A, Referenced \ to \ 25^\circ C \\ \\ V_{DS} = -16 \ \ V, \ V_{GS} = 0 \ V \\ \\ V_{GS} = 8 \ V, \ V_{DS} = 0 \ V \\ \\ \\ V_{GS} = -8 \ V, \ V_{DS} = 0 \ V \end{array}$	-20	-28	-1	V mV/°C
rain-Source Breakdown Voltage reakdown Voltage Temperature oefficient ero Gate Voltage Drain Current ate-Body Leakage Current, orward ate-Body Leakage Current, everse	$I_{D} = -250 \ \mu\text{A}, \text{Referenced to } 25^{\circ}\text{C}$ $V_{DS} = -16 \ \text{V}, \ V_{GS} = 0 \ \text{V}$ $V_{GS} = 8 \ \text{V}, \ V_{DS} = 0 \ \text{V}$	-20	-28	-1	mV/°C
oefficient ero Gate Voltage Drain Current ate-Body Leakage Current, orward ate-Body Leakage Current, everse	$V_{DS} = -16$ V, $V_{GS} = 0$ V $V_{GS} = 8$ V, $V_{DS} = 0$ V		-28	-1	
ate-Body Leakage Current, orward ate-Body Leakage Current, everse	$V_{GS} = 8 V, V_{DS} = 0 V$			-1	^
orward ate-Body Leakage Current, everse					μA
everse	$V_{GS} = -8 V$, $V_{DS} = 0 V$			100	nA
toriction				-100	nA
teristics (Note 2)					
ate Threshold Voltage	$V_{DS} = V_{GS}, I_D = -250 \ \mu A$	-0.4	-0.6	-1	V
ate Threshold Voltage emperature Coefficient	I_D = -250 µA,Referenced to 25°C		2		mV/°C
tatic Drain-Source	$V_{GS} = -4.5 \text{ V}, I_D = -3.5 \text{ A}$		0.110	0.130	Ω
n-Resistance					Ω Ω
			0.100	0.220	52
n-State Drain Current	V _{GS} = -4.5 V, V _{DS} =-5 V	-10			A
orward Transconductance	$V_{DS} = -5 \text{ V}, \text{ I}_{D} = -3.5 \text{ A}$		6.5		S
haracteristics					
put Capacitance	$V_{DS} = -10 V, V_{GS} = 0 V,$		405		pF
output Capacitance	f = 1.0 MHz		170		pF
everse Transfer Capacitance	-		45		pF
Characteristics (Note 2)					
urn-On Delay Time	$V_{DD} = -5 V, I_D = -1 A,$		6.5	13	ns
urn-On Rise Time	V_{GS} = -4.5 V, R_{GEN} = 6 Ω		20	35	ns
urn-Off Delay Time	-		31	50	ns
urn-Off Fall Time	-		21	35	ns
otal Gate Charge	V _{DS} = -5 V, I _D = -3.5 A,		6	8.5	nC
	$V_{GS} = -4.5 V$				nC
ate-Source Charge	$V_{GS} = -4.5 V$		0.8		
ate-Source Charge	V _{GS} = -4.5 V		0.8 1.3		nC
ate-Drain Charge	-				
	and Maximum Ratings			-2.1	
	emperature Coefficient tatic Drain-Source n-Resistance n-State Drain Current orward Transconductance haracteristics put Capacitance everse Transfer Capacitance characteristics (Note 2) urn-On Delay Time urn-Off Delay Time urn-Off Fall Time	ate Threshold Voltage emperature Coefficient $I_D = -250 \ \mu\text{A}, \text{Referenced to } 25^\circ\text{C}$ ate Threshold Voltage emperature Coefficient $I_D = -250 \ \mu\text{A}, \text{Referenced to } 25^\circ\text{C}$ atic Drain-Source n-Resistance $V_{GS} = -4.5 \ V, \ I_D = -3.5 \ A \\ V_{GS} = -4.5 \ V, \ I_D = -3.5 \ A \\ T_J=125^\circ\text{C}$ n-State Drain Current $V_{GS} = -4.5 \ V, \ V_{DS} = -5 \ V$ porward Transconductance $V_{DS} = -5 \ V, \ I_D = -3.5 \ A \\ T_J=125^\circ\text{C}$ put Capacitance $V_{DS} = -5 \ V, \ I_D = -3.5 \ A \\ Put Capacitanceput CapacitanceV_{DS} = -10 \ V, \ V_{GS} = 0 \ V, \\ f = 1.0 \ MHzeverse Transfer CapacitanceV_{DD} = -5 \ V, \ I_D = -1 \ A, \\ V_{GS} = -4.5 \ V, \ R_{GEN} = 6 \ \Omega \\ Jrn-Off Delay Timeurn-Off Fall Timeurn-Off Fall Time$	ate Threshold Voltage emperature CoefficientID = -250 μ A, Referenced to 25°Catic Drain-Source n-ResistanceVGS = -4.5 V, ID = -3.5 A VGS = -2.5 V, ID = -3.0 A VGS = -4.5 V, ID = -3.5 A TJ=125°Cn-State Drain CurrentVGS = -4.5 V, VDS = -5 Vn-State Drain CurrentVGS = -4.5 V, VDS = -5 Vorward TransconductanceVDS = -5 V, ID = -3.5 Aharacteristics put CapacitanceVDS = -5 V, ID = -3.5 Aput CapacitanceVDS = -10 V, VGS = 0 V, f = 1.0 MHzcharacteristics urn-On Delay TimeVDD = -5 V, ID = -1 A, VGS = -4.5 V, RGEN = 6 Ω urn-Off Delay TimeVDD = -5 V, RGEN = 6 Ω urn-Off Fall TimeVDD = -4.5 V, RGEN = 6 Ω	ate Threshold Voltage emperature CoefficientID = -250 μ A,Referenced to 25°C2atic Drain-Source n-ResistanceVGS = -4.5 V, ID = -3.5 A VGS = -2.5 V, ID = -3.0 A VGS = -4.5 V, ID = -3.5 A T_J=125°C0.110 0.140 0.155n-State Drain CurrentVGS = -4.5 V, VDS = -5 V T_J=125°C-10n-State Drain CurrentVGS = -4.5 V, VDS = -5 V T_J=125°C-10n-State Drain CurrentVGS = -4.5 V, VDS = -5 V T_J=125°C-10n-State Drain CurrentVDS = -5 V, ID = -3.5 A6.5haracteristics put CapacitanceVDS = -10 V, VGS = 0 V, f = 1.0 MHz405uput CapacitanceVDS = -10 V, VGS = 0 V, f = 1.0 MHz45Characteristics urn-On Delay TimeVDD = -5 V, ID = -1 A, VGS = -4.5 V, RGEN = 6 \Omega20urn-Off Delay TimeVDD = -5 V, RGEN = 6 \Omega20urn-Off Fall Time21	ate Threshold Voltage emperature Coefficient $I_D = -250 \ \mu A, Referenced to 25^{\circ}C$ 2 atic Drain-Source n-Resistance $V_{GS} = -4.5 \ V, \ I_D = -3.5 \ A$ 0.110 0.130 n-Resistance $V_{GS} = -4.5 \ V, \ I_D = -3.5 \ A$ 0.140 0.140 n-Resistance $V_{GS} = -4.5 \ V, \ I_D = -3.5 \ A$ 0.110 0.130 n-Resistance $V_{GS} = -4.5 \ V, \ I_D = -3.5 \ A$ 0.140 0.180 n-State Drain Current $V_{GS} = -4.5 \ V, \ V_{DS} = -5 \ V$ -10 -10 prward Transconductance $V_{DS} = -5 \ V, \ I_D = -3.5 \ A$ 6.5 -10 put Capacitance $V_{DS} = -10 \ V, \ V_{GS} = 0 \ V, \ f = 1.0 \ MHz$ 170 -170 everse Transfer Capacitance $V_{DS} = -10 \ V, \ V_{GS} = 0 \ V, \ f = 1.0 \ MHz$ 405 -1170 urn-On Delay Time $V_{DD} = -5 \ V, \ I_D = -1 \ A, \ V_{GS} = -4.5 \ V, \ R_{GEN} = 6 \ \Omega$ 20 \ 35 31 \ 50 urn-Off Delay Time $V_{DS} = -4.5 \ V, \ R_{GEN} = 6 \ \Omega$ 21 \ 35 31 \ 50



2: Pulse Test: Pulse Width \leq 300 $\mu s,$ Duty Cycle \leq 2.0%

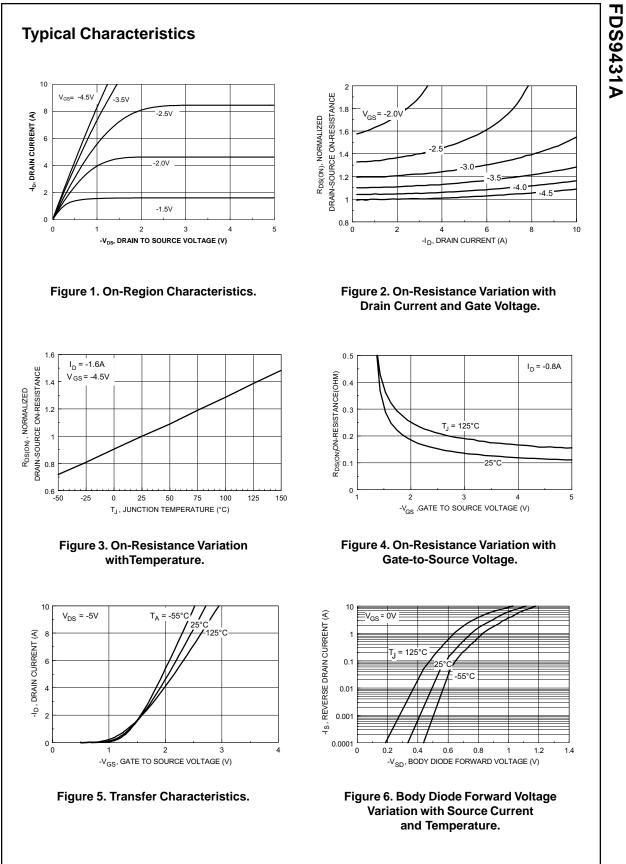

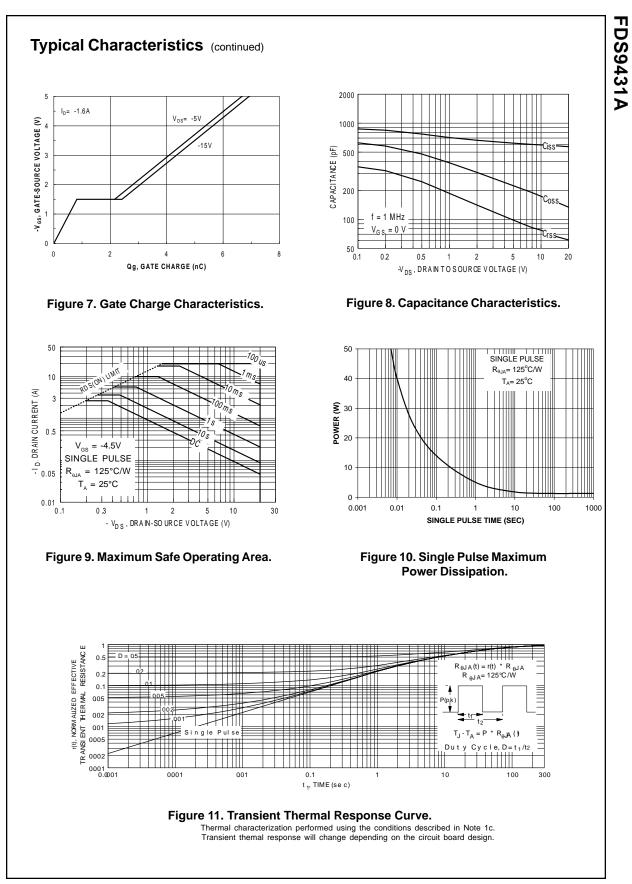

www.onsemi.com 4

ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <u>www.onsemi.com/site/pdf/Patent-Marking.pdf</u>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor haves, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such uninten

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800–282–9855 Toll Free USA/Canada Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910

Japan Customer Focus Center Phone: 81–3–5817–1050 ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative