

PNP Low Saturation Transistor

FZT790A

Description

These devices are designed with high current gain and low saturation voltage with collector currents up to 3 A continuous.

Features

• These Devices are Pb-Free, Halogen Free/BFR Free and are RoHS Compliant

ABSOLUTE MAXIMUM RATINGS (Notes 1, 2)

(Values are at $T_A = 25^{\circ}$ C unless otherwise noted)

Parameter	Symbol	Value	Unit
Collector–Emitter Voltage	V _{CEO}	-40	V
Collector-Base Voltage	V _{CBO}	-50	V
Emitter-Base Voltage	V _{EBO}	-5	V
Collector Current – Continuous	I _C	-3	Α
Operating and Storage Junction Temperature Range	T _J , T _{STG}	-55 to 150	°C

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

- 1. These ratings are based on a maximum junction temperature of 150°C.
- 2. These are steady-state limits. **onsemi** should be consulted on applications involving pulsed or low-duty-cycle operations.


THERMAL CHARACTERISTICS (Note 3)

(Values are at T_A = 25°C unless otherwise noted)

Parameter	Symbol	Value	Unit
Total Power Dissipation	P_{D}	2	W
Dissipation Derate Above 25°C	P_{D}	16	mW/°C
Thermal Resistance, Junction-to-Ambient	$R_{ hetaJA}$	62.5	°C/W

3. PCB size: FR-4, 76 mm x 114 mm x 1.57 mm (3.0 inch x 4.5 inch x 0.062 inch) with minimum land pattern size.


1



- 1. Base
- 2., 4. Collector
 - 3. Emitter

SOT-223 **CASE 318H**

MARKING DIAGRAM



= Assembly Location

= Year W = Work Week

790A

= Specific Device Code = Pb-Free Package

(Note: Microdot may be in either location)

ORDERING INFORMATION

See detailed ordering and shipping information on page 2 of this data sheet.

FZT790A

ELECTRICAL CHARACTERISTICS

(Values are at $T_A = 25^{\circ}C$ unless otherwise noted)

Symbol	Parameter	Conditions	Min.	Max.	Unit
BV _{CEO}	Collector–Emitter Breakdown Voltage	$I_C = -10 \text{ mA}, I_B = 0$	-40		V
BV _{CBO}	Collector-Base Breakdown Voltage	$I_C = -100 \mu\text{A}, I_E = 0$	-50		V
BV _{EBO}	Emitter-Base Breakdown Voltage	$I_E = -100 \mu A, I_C = 0$	-5.0		V
I _{CBO}	Collector Cut-Off Current	$V_{CB} = -30 \text{ V}, I_E = 0$		-100	nA
		$V_{CB} = -30 \text{ V}, I_E = 0, T_A = 100^{\circ}\text{C}$		-10	μΑ
I _{EBO}	Emitter Cut-Off Current	$V_{EB} = -4 \text{ V}, I_C = 0$		-100	nA
h _{FE}	DC Current Gain (Note 4)	$V_{CE} = -2.0 \text{ V}, I_{C} = -10 \text{ mA}$	300		
		$V_{CE} = -2.0 \text{ V}, I_{C} = -500 \text{ mA}$	250		1
		$V_{CE} = -2.0 \text{ V}, I_{C} = -1.0 \text{ A}$	200		
		$V_{CE} = -2.0 \text{ V}, I_{C} = -2.0 \text{ A}$	150		1
V _{CE} (sat)		$I_C = -500 \text{ mA}, I_B = -5.0 \text{ mA}$		-0.25	V
	(Note 4)	$I_C = -1.0 \text{ A}, I_B = -10 \text{ mA}$		-0.45	
		$I_C = -2.0 \text{ A}, I_B = -50 \text{ mA}$		-0.75	
V _{BE} (sat)	Base–Emitter Saturation Voltage (Note 4)	$I_C = -1.0 \text{ A}, I_B = -10 \text{ mA}$		-1.0	V
V _{BE} (on)	Base-Emitter On Voltage (Note 4)	$I_C = -1.0 \text{ A}, V_{CE} = -2.0 \text{ V}$		-1.0	V
f _T	Transition Frequency	$I_C = -50 \text{ mA}, V_{CE} = -5.0 \text{ V}, f = 50 \text{ MHz}$	100		MHz

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

ORDERING INFORMATION

Part Number	Top Mark	Package	Shipping [†]
FZT790A	790A	SOT-223 (Pb-Free)	4,000 Units/ Tape & Reel

[†]For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

^{4.} Pulse test: pulse width \leq 300 μ s, duty cycle \leq 2.0%

FZT790A

TYPICAL PERFORMANCE CHARACTERISTICS




Figure 1. Base–Emitter Saturation Voltage vs. Collector Current




Figure 3. Collector–Emitter Saturation Voltage vs. Collector Current




Figure 5. Current Gain vs. Collector Current




Figure 2. Base–Emitter On Voltage vs. Collector Current




Figure 4. Input/Output Capacitance vs. Reverse Bias Voltage




Figure 6. Power Dissipation vs. Ambient Temperature

SCALE 2:1



A

В


DATE 13 MAY 2020


NOTES

- DIMENSIONING AND TOLERANCING PER ASME
- DIMENSIDNING AND TOLERANCING PER ASME
 Y14.5M, 2009.
 CONTROLLING DIMENSION: MILLIMETERS
 DIMENSIONS D & E1 ARE DETERMINED AT DATUM
 H. DIMENSIONS DO NOT INCLUDE MOLD FLASH,
 PROTRUSIONS DR GATE BURRS. SHALL NOT
 EXCEED 0.23mm PER SIDE.
 LEAD DIMENSIONS & AND &1 DO NOT INCLUDE
 DAMBAR PROTRUSION. ALLOWABLE DAMBBAR
 PROTRUSION IS 0.08mm PER SIDE.
 DATUMS A AND B ARE DETERMINED AT DATUM H.
 A1 IS DEFINED AS THE VERTICAL DISTANCE
 FROM THE SEATING PLANE TO THE LOWEST
 POINT OF THE PACKAGE BODY.
 POSITIONAL TOLERANCE APPLIES TO DIMENSIONS
 & AND &1.


- b AND b1.

	MILLIMETERS		
DIM	MIN.	N□M.	MAX.
Α			1.80
A1	0.02	0.06	0.11
b	0.60	0.74	0.88
b1	2.90	3.00	3.10
С	0.24		0.35
D	6.30	6.50	6.70
E	6.70	7.00	7.30
E1	3.30	3.50	3.70
е	2.30 BSC		
L	0.25		
Ż	0*		10°

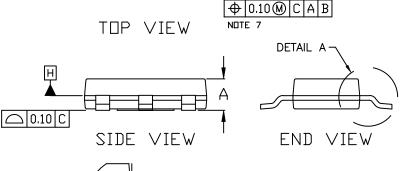





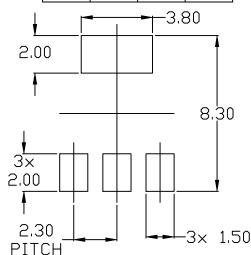

GENERIC MARKING DIAGRAM*

AYW

XXXXX.

= Assembly Location

= Year = Work Week W

XXXXX = Specific Device Code

= Pb-Free Package

(Note: Microdot may be in either location)

*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "•", may or may not be present. Some products may not follow the Generic Marking.

RECOMMENDED MOUNTING FOOTPRINT

For additional information on our Pb-Free strategy and soldering details, please download the IIN Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

DOCUMENT NUMBER:	98ASH70634A	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.	
DESCRIPTION:	SOT-223		PAGE 1 OF 1

ON Semiconductor and unare trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the

onsemi, Onsemi, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. Onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA class 3 medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:

 $\textbf{Technical Library:} \ \underline{www.onsemi.com/design/resources/technical-documentation}$

onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at

www.onsemi.com/support/sales