

200 mA, 30 V Schottky Barrier Diode

NSR02F30MX

These Schottky barrier diodes are optimized for low forward voltage drop and low leakage current that offers the most optimal power dissipation in applications. They are housed in a spacing saving x3DFN 0201 package ideal for space constraint applications.

Features

- Low Forward Voltage Drop 500 mV (Typ.) @ $I_F = 200 \text{ mA}$
- Low Reverse Current 20 μ A (Typ.) @ $V_R = 30 \text{ V}$
- 200 mA of Continuous Forward Current
- ESD Rating Human Body Model: Class 2
 - Machine Model: Class M3
 - CDM: Class IV
- High Switching Speed
- These Devices are Pb–Free, Halogen Free/BFR Free and are RoHS Compliant

Typical Applications

- LCD and Keypad Backlighting
- Camera Photo Flash
- Buck and Boost dc-dc Converters
- Reverse Voltage and Current Protection
- Clamping and Protection

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Reverse Voltage	V_{R}	30	V
Forward Current (DC)	IF	200	mA
Forward Surge Current (60 Hz @ 1 cycle)	I _{FSM}	2	Α
Repetitive Peak Forward Current (Pulse Wave = 1 sec, Duty Cycle = 66%)	I _{FRM}	1	Α
ESD Rating: Human Body Model Machine Model	ESD	2 - 4 >400	kV V

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1





J = Specific Device Code (Rotated 180°) M = Month Code

ORDERING INFORMATION

Device	Package	Shipping†
NSR02F30MXT5G	X3DFN (Pb-Free)	10000 / Tape & Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

Table 1. THERMAL CHARACTERISTICS


Rating	Symbol	Max	Unit
Thermal Resistance Junction-to-Ambient (Note 1) Total Power Dissipation @ TA = 25°C	R _{θJA} P _D	695 180	°C/W mW
Storage Temperature Range	T _{stg}	-55 to +125	°C
Junction Temperature	TJ	+125	°C

^{1.} Mounted onto a 4 in square FR-4 board 100 mm sq. 2 oz. Cu 0.06" thick single sided. Operating to steady state.

Table 2. ELECTRICAL CHARACTERISTICS ($T_A = 25^{\circ}C$ unless otherwise noted)

Parameter Test Conditions		Symbol	Symbol Min		Max	Unit
Reverse Leakage	V _R = 10 V	I _R	-	-	15	μΑ
Reverse Leakage	V _R = 30 V	I _R	-	20	50	μΑ
Forward Voltage	I _F = 1 mA	V _F	-	155		mV
Forward Voltage	I _F = 10 mA	V _F	-	250	290	mV
Forward Voltage	I _F = 100 mA	V _F	-	375	490	mV
Forward Voltage	I _F = 200 mA	V _F	-	500	600	mV
Total Capacitance	V _R = 1.0 V, f = 1.0 MHz	C _T	-	6	8	pF
Reverse Recovery Time	$I_F = I_R = 10 \text{ mA}, I_{R(REC)} = 1.0 \text{ mA}, Figure 2$	t _{rr}	-	2.4	3	ns

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

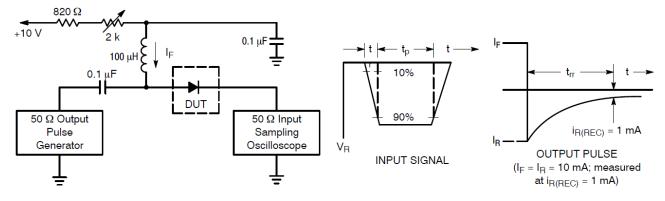

Notes: 1. A 2.0 $k\Omega$ variable resistor adjusted for a Forward Current (IF) of 10 mA.

- 2. Input pulse is adjusted so $I_{\mbox{\scriptsize R(peak)}}$ is equal to 10 mA.
- 3. t_p » t_{rr}

Figure 1. Recovery Time Equivalent Test Circuit

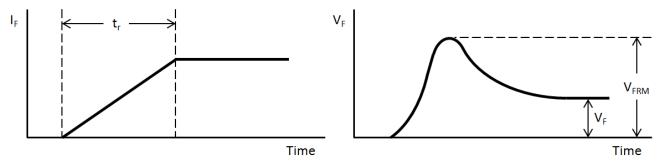


Figure 2. Peak Forward Recover Voltage Definition

NSR02F30MX

TYPICAL CHARACTERISTICS

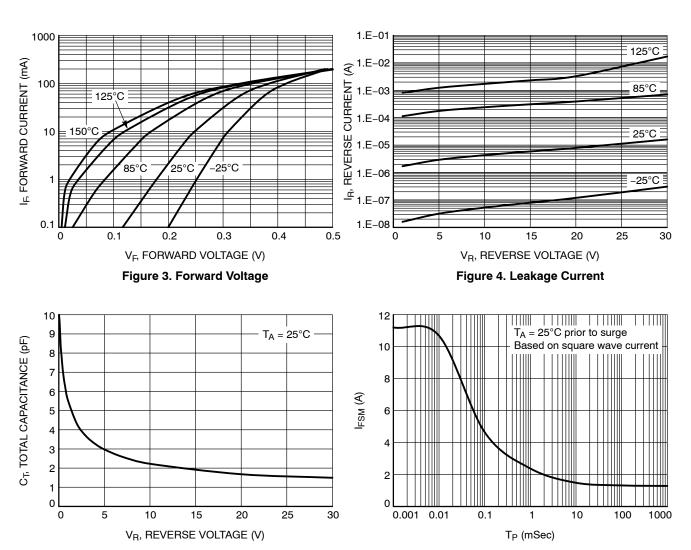


Figure 5. Total Capacitance

Figure 6. Forward Surge Current


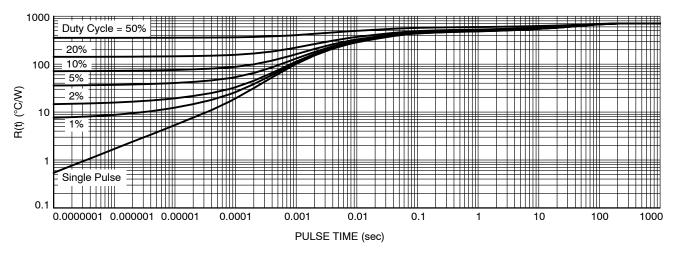



Figure 7. Thermal Response




X3DFN2 0.62x0.32x0.24, 0.35P CASE 152AF ISSUE C

DATE 08 AUG 2023







GENERIC MARKING DIAGRAM*




X = Specific Device Code

M = Date Code

NOTES:

- . DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
- 2. CONTROLLING DIMENSION: MILLIMETERS
- 3. 0201

	MILLIMETERS		
DIM	MIN.	N□M.	MAX.
Α	0.25	0.29	0.33
A1	0.00		0.05
A2	0.14	0.24	0.34
b	0.22	0.25	0.28
b2	0.150 REF		
D	0.58	0.62	0.66
Е	0.28	0.32	0.36
е	0.355 BSC		
L2	0.17	0.20	0.23
L3	0.050 REF		



RECOMMENDED MOUNTING FOOTPRINT*

* For additional information on our Pb-Free strategy and soldering details, please download the □N Semiconductor Soldering and Mounting Techniques Reference Manual, S□LDERRM/D.

DOCUMENT NUMBER:	98AON56472E	Electronic versions are uncontrolled except when accessed directly from the Document Repositor Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.	
DESCRIPTION:	X3DFN2 0.62x0.32x0.24, 0.	35P	PAGE 1 OF 1

onsemi and ONSemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

^{*}This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "•", may or may not be present. Some products may not follow the Generic Marking.

onsemi, Onsemi, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. Onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA class 3 medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:

 $\textbf{Technical Library:} \ \underline{www.onsemi.com/design/resources/technical-documentation}$

onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at

www.onsemi.com/support/sales