# **ON Semiconductor**

# Is Now



To learn more about onsemi™, please visit our website at www.onsemi.com

onsemi and ONSEMI. and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. onsemi reserves the right to make changes at any time to any products or information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/ or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use onsemi products for any such unintended or unauthorized application,

# MOSFET - Power, P-Channel, Load Switch with Level-Shift, TSOP-6 8 V, ±3.3 A

# NTGD1100L

The NTGD1100L integrates a P and N-Channel MOSFET in a single package. This device is particularly suited for portable electronic equipment where low control signals, low battery voltages and high load currents are needed. The P-Channel device is specifically designed as a load switch using ON Semiconductor state-of-the-art trench technology. The N-Channel, with an external resistor (R1), functions as a level-shift to drive the P-Channel. The N-Channel MOSFET has internal ESD protection and can be driven by logic signals as low as 1.5 V. The NTGD1100L operates on supply lines from 1.8 to 8.0 V and can drive loads up to 3.3 A with 8.0 V applied to both  $V_{\rm IN}$  and  $V_{\rm ON/OFF}$ 

### **Features**

- Extremely Low R<sub>DS(on)</sub> Load Switch MOSFET
- Level Shift MOSFET is ESD Protected
- Low Profile, Small Footprint Package
- V<sub>IN</sub> Range 1.8 to 8.0 V
- ON/OFF Range 1.5 to 8.0 V
- ESD Rating of 2000 V
- These Devices are Pb-Free and are RoHS Compliant

# **MAXIMUM RATINGS** (T<sub>.I</sub> = 25°C unless otherwise noted)

Rating			Symbol	Value	Unit
Input Voltage (V <sub>DSS</sub> , P-Ch)			V <sub>IN</sub>	8.0	V
ON/OFF Voltage (V <sub>GS</sub> , N-Ch)			V <sub>ON/OFF</sub>	8.0	V
Continuous Load Current	, .A =0 0		ΙL	±3.3	Α
(Note 1)	State	T <sub>A</sub> = 85°C		±2.4	
Power Dissipation	Steady $T_A = 25^{\circ}C$ State $T_A = 85^{\circ}C$		$P_{D}$	0.83	W
(Note 1)				0.43	
Pulsed Load Current	tp =	: 10 μs	I <sub>LM</sub>	±10	Α
Operating Junction and Storage Temperature			T <sub>J</sub> , T <sub>STG</sub>	–55 to 150	°C
Source Current (Body Diode)			IS	-1.0	Α
ESD Rating, MIL–STD–883D HBM (100 pF, 1.5 k $\Omega$ )			ESD	2.0	kV
Lead Temperature for Soldering Purposes (1/8" from case for 10 s)			TL	260	°C

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. Surface-mounted on FR4 board using 1 in sq pad size (Cu area = 1.127 in sq [1 oz] including traces).




# ON Semiconductor®

### www.onsemi.com

V <sub>(BR)DSS</sub>	(BR)DSS R <sub>DS(on)</sub> TYP	
8.0 V	40 mΩ @ -4.5 V	
	55 mΩ @ –2.5 V	±3.3 A
	80 mΩ @ –1.8 V	


### SIMPLIFIED SCHEMATIC



# MARKING DIAGRAM & PIN ASSIGNMENT



TSOP-6 CASE 318G STYLE 11



TZ = Specific Device Code

M = Date Code\*
■ Pb–Free Package

(Note: Microdot may be in either location)

\*Date Code orientation may vary depending upon manufacturing location.

## **ORDERING INFORMATION**

Device	Package	Shipping <sup>†</sup>
NTGD1100LT1G	TSOP-6 (Pb-Free)	3000 / Tape & Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specification Brochure, BRD8011/D.

# THERMAL RESISTANCE RATINGS

Rating	Symbol	Max	Unit
Junction-to-Ambient - Steady State (Note 2)	$R_{\mu JA}$	150	°C/W
Junction-to-Foot - Steady State (Note 2)		50	

<sup>2.</sup> Surface-mounted on FR4 board using 1 in sq pad size (Cu area = 1.127 in sq [1 oz] including traces).

# **ELECTRICAL CHARACTERISTICS** (T<sub>J</sub> = 25°C unless otherwise noted)

Characteristic	Symbol	Test Condition		Min	Тур	Max	Unit
OFF CHARACTERISTICS							
Q2 Drain-to-Source Breakdown Voltage	V <sub>IN</sub>	$V_{GS2} = 0 \text{ V}, I_{D2} = -250 \mu\text{A}$		8.0			V
Forward Leakage Current	I <sub>FL</sub>	$V_{GS1} = 0 \text{ V}, \qquad T_{J} = 25^{\circ}\text{C}$				1.0	μΑ
		V <sub>DS1</sub> = 8.0 V	T <sub>J</sub> = 125°C			10	
Q2 Gate-to-Source Leakage Current	I <sub>GSS</sub>	V <sub>DS2</sub> = 0 V, V <sub>GS</sub>	<sub>S2</sub> = ±8.0 V			±100	nA
Q2 Diode Forward On-Voltage	$V_{SD}$	$I_S = -1.0 \text{ A}, V_C$	<sub>GS2</sub> = 0 V		-0.7	-1.0	V
ON CHARACTERISTICS							
Voltage ON/OFF	V <sub>ON/OFF</sub>					8.0	V
Q1 Gate Threshold Voltage	V <sub>GS1</sub>	$V_{GS1} = V_{DS1}, I_D = 50 \mu A$		0.6		1.2	V
Input Voltage	V <sub>IN</sub>	$V_{GS2} = V_{DS2}, I_D = 250 \mu A$		1.8		8.0	V
Q2 Drain-to-Source On Resistance	R <sub>DS(on)</sub>	V <sub>ON/OFF</sub> = 1.5 V, V <sub>IN</sub> = 4.5 V			40	55	mΩ
		I <sub>L</sub> = 1.0 A	V <sub>IN</sub> = 2.5 V		55	70	
			V <sub>IN</sub> = 1.8 V		80	140	
Load Current	ال	$V_{DROP} \le 0.2 \text{ V}, V_{IN} = 5.0 \text{ V}, V_{ON/OFF} = 1.5 \text{ V}$		1.0			Α
	$V_{DROP} \le 0.2 \text{ V}, V_{IN} = 2.5 \text{ V}, V_{ON/OFF} = 1.5 \text{ V}$			1.0			
$V_{DROP} \le 0.2 \text{ V}, V_{IN} = 1.8 \text{ V}, V_{ON/OFF} = 1.5 \text{ V}$			1.0				

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

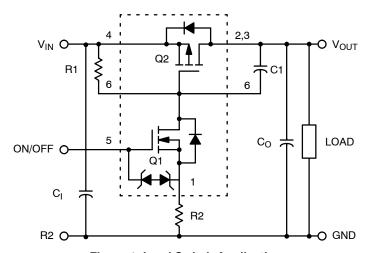


Figure 1. Load Switch Application

Components	Description	Values
R1	Pullup Resistor	Typical 10 k $\Omega$ to 1.0 M $\Omega$
R2	Optional Slew-Rate Control	Typical 0 to 100 kΩ
C0	Output Capacitance	Usually < 1.0 μF
C1	Optional In-Rush Current Control	Typical ≤ 1000 pF

# **TYPICAL CHARACTERISTICS**

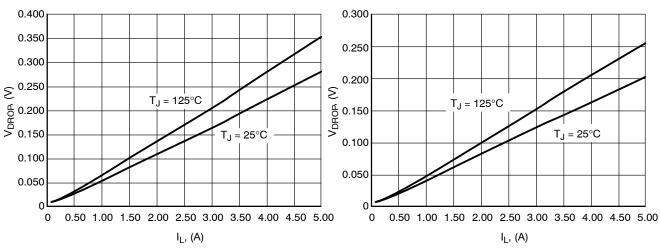


Figure 2.  $V_{DROP}$  vs.  $I_L @ V_{IN} = 2.5 \text{ V}$ 

Figure 3.  $V_{DROP}$  vs.  $I_L @ V_{IN} = 4.5 \text{ V}$ 

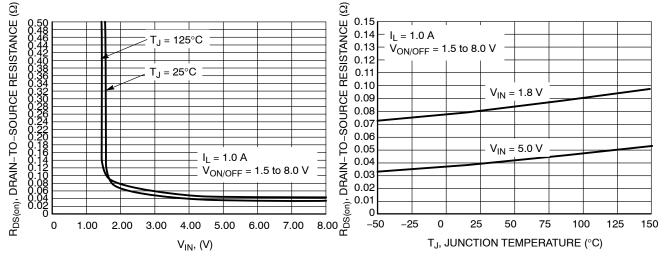


Figure 4. On Resistance vs. Input Voltage

Figure 5. On Resistance Variation with Temperature


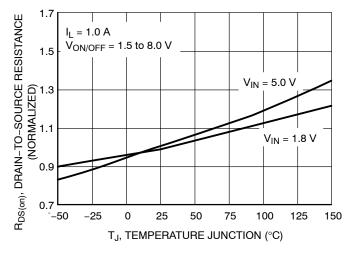


Figure 6. Normalized On Resistance Variation with Temperature

# TYPICAL CHARACTERISTICS

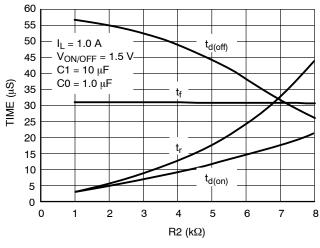

60 55  $t_{d\underline{(off)}}$ 50  $I_L = 1.0 A$  $V_{ON/OFF} = 3.0 V_{-}$ 45  $C1 = 10 \mu F$ 40  $C0 = 1.0 \mu F$ TIME (µS) 35 30 25 20 15 10 5  $t_{d(on)}$ 0 0 2 3 4 5 6 7 8 R2 (kΩ)

Figure 7. Switching Variation R2 @  $V_{IN}$  = 4.5 V, R1 = 20 k $\Omega$ 

40 35 30  $t_{r}$ 25 20  $I_{L} = 1.0 A$  $t_{d(off)}$ V<sub>ON/OFF</sub> = 1.5 V 15  $C1 = 10 \,\mu F$  $t_{d(on)}$  $C0 = 1.0 \mu F$ 

TIME (µS)

10

5

0

0

Figure 8. Switching Variation R2 @  $V_{IN}$  = 4.5 V, R1 = 20 k $\Omega$ 

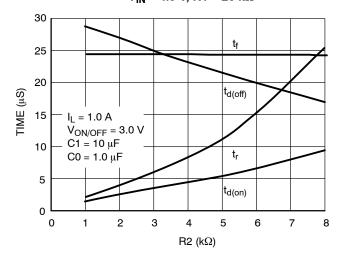


Figure 9. Switching Variation R2 @  $V_{IN}$  = 2.5 V, R1 = 20 k $\Omega$ 

4

R2 ( $k\Omega$ )


5

6

2

3

Figure 10. Switching Variation R2 @  $\mbox{V}_{\mbox{\footnotesize{IN}}}$  = 2.5 V, R1 = 20  $\mbox{k}\Omega$ 

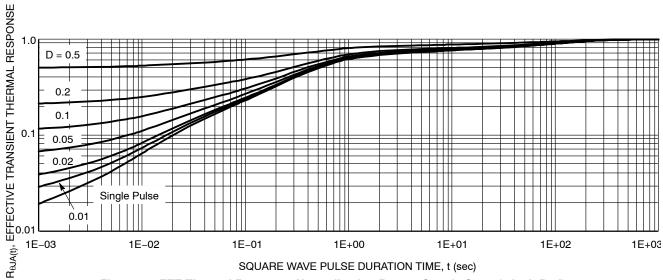


8

Figure 11. FET Thermal Response Normalized to  $R_{\theta JA}$  at Steady State (1 inch Pad)

## PACKAGE DIMENSIONS

# TSOP-6 CASE 318G-02 ISSUE V

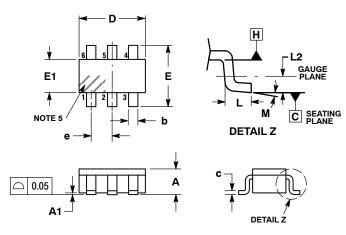

- 1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
- CONTROLLING DIMENSION: MILLIMETERS.
  MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH. MINIMUM
- LEAD THICKNESS IS THE MINIMUM THICKNESS OF BASE MATERIAL. DIMENSIONS D AND E1 DO NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR GATE BURRS. MOLD FLASH, PROTRUSIONS, OR GATE BURRS SHALL NOT EXCEED 0.15 PER SIDE. DIMENSIONS D AND E1 ARE DETERMINED AT DATUM H.
  5. PIN ONE INDICATOR MUST BE LOCATED IN THE INDICATED ZONE.


	MILLIMETERS				
DIM	MIN	NOM	MAX		
Α	0.90	1.00	1.10		
A1	0.01	0.06	0.10		
b	0.25	0.38	0.50		
c	0.10	0.18	0.26		
D	2.90	3.00	3.10		
E	2.50	2.75	3.00		
E1	1.30	1.50	1.70		
е	0.85	0.95	1.05		
L	0.20	0.40	0.60		
L2	0.25 BSC				
М	0°		10°		

STYLE 11:

PIN 1. SOURCE 1 2. DRAIN 2

- 3. DRAIN 2 4. SOURCE 2
- 5. GATE 1
- 6. DRAIN 1/GATE 2

# **RECOMMENDED SOLDERING FOOTPRINT\***



**DIMENSIONS: MILLIMETERS** 

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

ON Semiconductor and IN are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <a href="https://www.onsemi.com/site/pdf/Patent-Marking.pdf">www.onsemi.com/site/pdf/Patent-Marking.pdf</a>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability. arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

#### **PUBLICATION ORDERING INFORMATION**

LITERATURE FULFILLMENT: Email Requests to: orderlit@onsemi.com TECHNICAL SUPPORT

North American Technical Support: Voice Mail: 1 800-282-9855 Toll Free USA/Canada

ON Semiconductor Website: www.onsemi.com Phone: 011 421 33 790 2910 Europe, Middle East and Africa Technical Support:

Phone: 00421 33 790 2910

For additional information, please contact your local Sales Representative