Onsemi

MOSFET – Power, Single, P-Channel, Trench, SC-88 -20 V, -4.2 A

NTJS4151P

Features

- Leading Trench Technology for Low RDS(ON) Extending Battery Life
- SC-88 Small Outline (2x2 mm) for Maximum Circuit Board Utilization, Same as SC-70-6
- Gate Diodes for ESD Protection
- Pb–Free Package is Available

Applications


- High Side Load Switch
- Cell Phones, Computing, Digital Cameras, MP3s and PDAs


Param	Parameter				Unit		
Drain-to-Source Voltage	Ð		V _{DSS}	-20	V		
Gate-to-Source Voltage	•		V _{GS}	±12	V		
Continuous Drain	Steady	T _A = 25 °C	۱ _D	-3.3	А		
Current (Note 1)	State	T _A = 85 °C		-2.4			
	t ≤ 5 s	T _A = 25 °C		-4.2			
Power Dissipation (Note 1)			PD	1.0	W		
Pulsed Drain Current	-	t _p = 10 μs	I _{DM}	-10	А		
Operating Junction and S	Operating Junction and Storage Temperature				°C		
Source Current (Body Di	I _S	-1.3	А				
Lead Temperature for So (1/8" from case for 10	ΤL	260	°C				
ESD Hum	an Body N	lodel (HBM)	ESD	4000	V		

MAXIMUM RATINGS (T = 25°C unless otherwise stated)

V _{(BR)DSS}	R _{DS(on)} Typ	I _D Max
	47 mΩ @ –4.5 V	
–20 V	70 mΩ @ −2.5 V	-4.2 A
	180 mΩ @ −1.8 V	







(Note: Microdot may be in either location)

ORDERING INFORMATION

See detailed ordering and shipping information ion page 5 of this data sheet.

THERMAL RESISTANCE RATINGS (Note 1)

Parameter	Symbol	Мах	Unit
Junction-to-Ambient - Steady State	$R_{\theta JA}$	125	°C/W
Junction-to-Ambient – t \leq 5 s	$R_{\theta JA}$	75	
Junction-to-Lead - Steady State	$R_{\theta JL}$	45	

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. Surface mounted on FR4 board using 1 in sq pad size

(Cu area = 1.127 in sq [1 oz] including traces).

ELECTRICAL CHARACTERISTICS (TJ=25°C unless otherwise stated)

Parameter	Symbol	Test Cor	dition	Min	Тур	Max	Unit
OFF CHARACTERISTICS							· · · ·
Drain-to-Source Breakdown Voltage	V _{(BR)DSS}			-20			V
Drain-to-Source Breakdown Voltage Temperature Coefficient	V _{(BR)DSS} /T _J	V_{GS} = 0 V, I_D = -250 μ A			-12		mV/°C
Zero Gate Voltage Drain Current	I _{DSS}	V _{GS} = 0 V,	$T_J = 25^{\circ}C$			-1.0	μA
		$V_{DS} = -16 V$	$T_J = 85^{\circ}C$			-5.0	
Gate-to-Source Leakage Current	I _{GSS}	V _{DS} = 0 V, V _C	_{as} = ±4.5 V			±1.5	μA
		V_{DS} = 0 V, V_{GS} = ±12 V				±10	mA
ON CHARACTERISTICS (Note 2)							
Gate Threshold Voltage	V _{GS(TH)}			-0.40		-1.2	V

Gate Threshold Voltage	VGS(TH)		-0.40		-1.2	v
Negative Threshold Temperature Coefficient	V _{GS(TH)} /T _J	V_{GS} = V_{DS} , I_D = -250 μ A		4.0		mV/°C
Drain-to-Source On Resistance	R _{DS(on)}	V_{GS} = -4.5 V, I _D = -3.3 A		47	60	mΩ
		V_{GS} = -2.5 V, I _D = -2.3 A		70	85	
		V_{GS} = -1.8 V, I _D = -1.0 A		180	205	
Forward Transconductance	9 FS	V_{GS} = -10 V, I _D = -3.3 A		12		S

CHARGES AND CAPACITANCES

Input Capacitance	C _{ISS}		850	pF
Output Capacitance	C _{OSS}	V _{GS} = 0 V, f = 1.0 MHz, V _{DS} = -10 V	160	
Reverse Transfer Capacitance	C _{RSS}		110	
Total Gate Charge	Q _{G(TOT)}		10	nC
Gate-to-Source Charge	Q _{GS}	$V_{GS} = -4.5 \text{ V}, V_{DS} = -10 \text{ V},$ $I_D = -3.3 \text{ A}$	1.5	
Gate-to-Drain Charge	Q _{GD}		2.8	

SWITCHING CHARACTERISTICS (Note 3)

Turn-On Delay Time	t _{d(ON)}		0.85	μs
Rise Time	t _r	V _{GS} = -4.5 V, V _{DD} = -10 V,	1.7	
Turn-Off Delay Time	t _{d(OFF)}	$I_{\rm D} = -1.0 \text{ A}, \text{ R}_{\rm G} = 6.0 \Omega$	2.7	
Fall Time	t _f		4.2	


DRAIN-SOURCE DIODE CHARACTERISTICS

Forward Diode Voltage	V _{SD}	$V_{GS} = 0 \text{ V}, \text{ I}_{S} = -1.3 \text{ A}, T_{J} = 25^{\circ}\text{C}$	-0.75	-1.2	V
Reverse Recovery Time	t _{RR}		63		ns
Charge Time	Ta	$V_{GS} = 0 V, dI_S/dt = 100$	9.0		
Discharge Time	Tb	A/μs, I _S = −1.3 A	54		
Reverse Recovery Charge	Q _{RR}		0.23		nC

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions. 2. Pulse Test: pulse width \leq 300 µs, duty cycle \leq 2%.

3. Switching characteristics are independent of operating junction temperatures.

TYPICAL CHARACTERISTICS

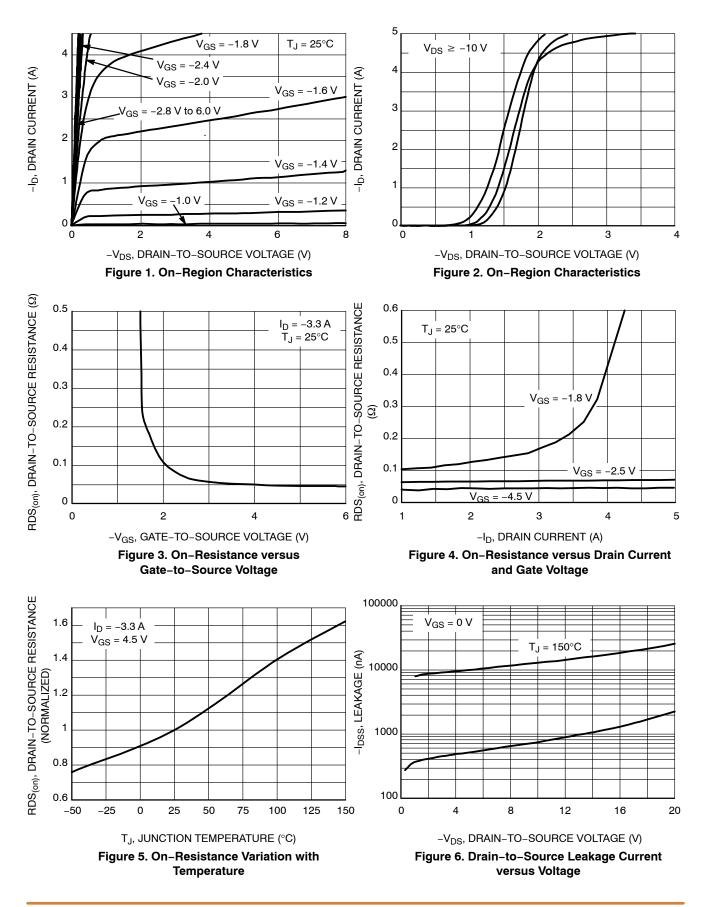

TYPICAL CHARACTERISTICS

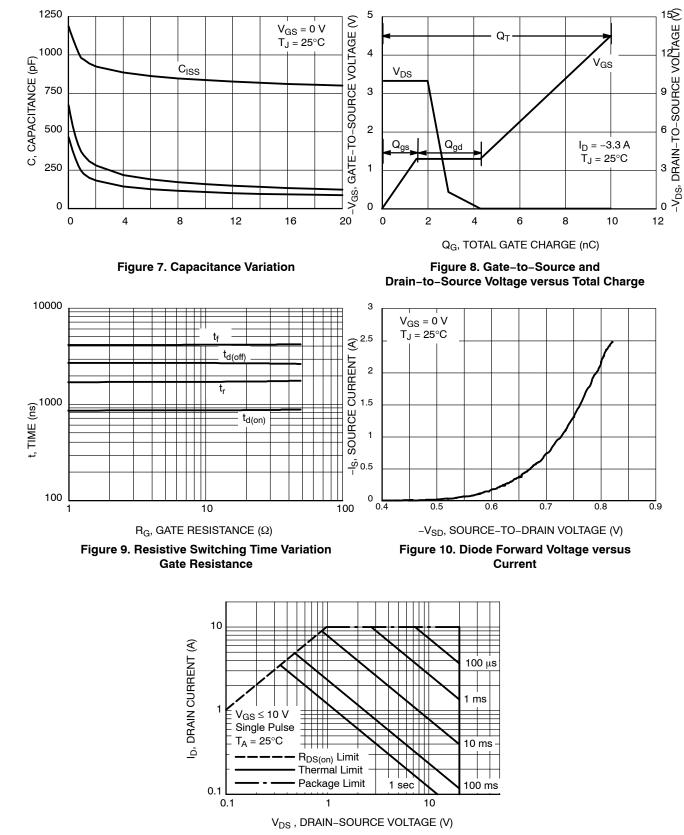


Figure 11. Safe Operating Area

Table 1. ORDERING INFORMATION


Part Number	Marking (XX)	Package	Shipping [†]
NTJS4151PT1	TY	SC-88	3000 / Tape & Reel
NTJS4151PT1G	TY	SC–88 (Pb–Free)	3000 / Tape & Reel

+For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

SC-88 2.00x1.25x0.90, 0.65P CASE 419B-02 **ISSUE Z**


DATE 18 APR 2024


DUSEM




NOTES:

- DIMENSIONING AND TOLERANCING CONFORM TO ASME 1. Y14.5-2018.
- 2.
- ALL DIMENSION ARE IN MILLIMETERS. DIMENSIONS D AND E1 DO NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR GATE BURRS. MOLD FLASH, PROTRUSIONS, OR GATE BURRS SHALL NOT EXCEED 0.20 3. PER END.
- 4. DIMENSIONS D AND E1 AT THE OUTERMOST EXTREMES OF DATUMS A AND B ARE DETERMINED AT DATUM H.
- 5.
- DIMENSIONS & AND C APPLY TO THE FLAT SECTION OF THE LEAD BETWEEN 0.08 AND 0.15 FROM THE TIP. 6.
- DIMENSION b DOES NOT INCLUDE DAMBAR PROTRUSION. 7 ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.08 TOTAL IN EXCESS OF DIMENSION & AT MAXIMUM MATERIAL CONDITION. THE DAMBAR CANNOT BE LOCATED ON THE LOWER RADIUS OF THE FOOT.






DETAIL A



	MILLIMETERS				
DIM	MIN.	NOM.	MAX.		
A			1.10		
A1	0.00		0.10		
A2	0.70	0.90	1.00		
b	0.15	0.20	0.25		
с	0.08	0.15	0.22		
D		2.00 BSC	;		
E	2.10 BSC				
E1		1.25 BSC	;		
е		0.65 BSC)		
L	0.26	0.36	0.46		
L2	0.15 BSC				
aaa	0.15				
bbb	0.30				
ccc	0.10				
ddd		0.10			



RECOMMENDED MOUNTING FOOTPRINT*

FOR ADDITIONAL INFORMATION ON OUR Pb-FREE STRATEGY AND SOLDERING DETAILS, PLEASE DOWNLOAD THE ONSEMI SOLDERING AND MOUNTING TECHNIQUES REFERENCE MANUAL, SOLDERRM/D.

XXX = Specific Device Code = Date Code* Μ

GENERIC **MARKING DIAGRAM***

XXXM-

0

6

= Pb-Free Package

(Note: Microdot may be in either location)

*Date Code orientation and/or position may vary depending upon manufacturing location.

*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "•", may or may not be present. Some products may not follow the Generic Marking.

STYLES ON PAGE 2

DOCUMENT NUMBER:	98ASB42985B	BBASB42985B Electronic versions are uncontrolled except when accessed directly from the Document Rep Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.				
DESCRIPTION:	SC-88 2.00x1.25x0.90, 0.65P		PAGE 1 OF 2			
onsemi and ONSEMi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its pattent rights nor the rights of others.						

SC-88 2.00x1.25x0.90, 0.65P CASE 419B-02 ISSUE Z

DATE 18 APR 2024

STYLE 1: PIN 1. EMITTER 2 2. BASE 2 3. COLLECTOR 1 4. EMITTER 1 5. BASE 1 6. COLLECTOR 2	STYLE 2: CANCELLED	STYLE 3: CANCELLED	STYLE 4: PIN 1. CATHODE 2. CATHODE 3. COLLECTOR 4. EMITTER 5. BASE 6. ANODE	STYLE 5: PIN 1. ANODE 2. ANODE 3. COLLECTOR 4. EMITTER 5. BASE 6. CATHODE	STYLE 6: PIN 1. ANODE 2 2. N/C 3. CATHODE 1 4. ANODE 1 5. N/C 6. CATHODE 2
STYLE 7: PIN 1. SOURCE 2 2. DRAIN 2 3. GATE 1 4. SOURCE 1 5. DRAIN 1 6. GATE 2	STYLE 8: CANCELLED	STYLE 9: PIN 1. EMITTER 2 2. EMITTER 1 3. COLLECTOR 1 4. BASE 1 5. BASE 2 6. COLLECTOR 2	STYLE 10: PIN 1. SOURCE 2 2. SOURCE 1 3. GATE 1 4. DRAIN 1 5. DRAIN 2 6. GATE 2	STYLE 11: PIN 1. CATHODE 2 2. CATHODE 2 3. ANODE 1 4. CATHODE 1 5. CATHODE 1 6. ANODE 2	STYLE 12: PIN 1. ANODE 2 2. ANODE 2 3. CATHODE 1 4. ANODE 1 5. ANODE 1 6. CATHODE 2
STYLE 13:	STYLE 14:	STYLE 15:	STYLE 16:	STYLE 17:	STYLE 18:
PIN 1. ANODE	PIN 1. VREF	PIN 1. ANODE 1	PIN 1. BASE 1	PIN 1. BASE 1	PIN 1. VIN1
2. N/C	2. GND	2. ANODE 2	2. EMITTER 2	2. EMITTER 1	2. VCC
3. COLLECTOR	3. GND	3. ANODE 3	3. COLLECTOR 2	3. COLLECTOR 2	3. VOUT2
4. EMITTER	4. IOUT	4. CATHODE 3	4. BASE 2	4. BASE 2	4. VIN2
5. BASE	5. VEN	5. CATHODE 2	5. EMITTER 1	5. EMITTER 2	5. GND
6. CATHODE	6. VCC	6. CATHODE 1	6. COLLECTOR 1	6. COLLECTOR 1	6. VOUT1
STYLE 19:	STYLE 20:	STYLE 21:	STYLE 22:	STYLE 23:	STYLE 24:
PIN 1. I OUT	PIN 1. COLLECTOR	PIN 1. ANODE 1	PIN 1. D1 (i)	PIN 1. Vn	PIN 1. CATHODE
2. GND	2. COLLECTOR	2. N/C	2. GND	2. CH1	2. ANODE
3. GND	3. BASE	3. ANODE 2	3. D2 (i)	3. Vp	3. CATHODE
4. V CC	4. EMITTER	4. CATHODE 2	4. D2 (c)	4. N/C	4. CATHODE
5. V EN	5. COLLECTOR	5. N/C	5. VBUS	5. CH2	5. CATHODE
6. V REF	6. COLLECTOR	6. CATHODE 1	6. D1 (c)	6. N/C	6. CATHODE
STYLE 25:	STYLE 26:	STYLE 27:	STYLE 28:	STYLE 29:	STYLE 30:
PIN 1. BASE 1	PIN 1. SOURCE 1	PIN 1. BASE 2	PIN 1. DRAIN	PIN 1. ANODE	PIN 1. SOURCE 1
2. CATHODE	2. GATE 1	2. BASE 1	2. DRAIN	2. ANODE	2. DRAIN 2
3. COLLECTOR 2	3. DRAIN 2	3. COLLECTOR 1	3. GATE	3. COLLECTOR	3. DRAIN 2
4. BASE 2	4. SOURCE 2	4. EMITTER 1	4. SOURCE	4. EMITTER	4. SOURCE 2
5. EMITTER	5. GATE 2	5. EMITTER 2	5. DRAIN	5. BASE/ANODE	5. GATE 1
6. COLLECTOR 1	6. DRAIN 1	6. COLLECTOR 2	6. DRAIN	6. CATHODE	6. DRAIN 1

Note: Please refer to datasheet for style callout. If style type is not called out in the datasheet refer to the device datasheet pinout or pin assignment.

DOCUMENT NUMBER:	98ASB42985B	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.	
DESCRIPTION:	SC-88 2.00x1.25x0.90, 0.65P		PAGE 2 OF 2
onsemi and ONSEMi. are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.			

© Semiconductor Components Industries, LLC, 2019

onsemi, ONSEMI, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at <u>www.onsemi.com/site/pdf/Patent_Marking.pdf</u>. onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or indental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification. Buyer shall indemnify and hold onsemi and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs,

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:

Technical Library: www.onsemi.com/design/resources/technical-documentation onsemi Website: www.onsemi.com

ONLINE SUPPORT: <u>www.onsemi.com/support</u> For additional information, please contact your local Sales Representative at <u>www.onsemi.com/support/sales</u>