

MMIC Mixer

IIP3 = 15 dBm, Gc = -0.5 dB @ 450 MHz, MCPH6

SMA5101

Features

• Wide Band: Up to Ku Band

Low Distortion: IIP3 = 20 dBm (@ I_{CC} > 11 mA)
SMT, Ultra Small Package : 2.0x2.1x0.85 mm
High Conversion Gain: -0.5 dB (@ 450 MHz)
Low Voltage Available: 1.2 V and Above
Pb-Free, Halogen Free And ROHS Compliant

Specifications

ABSOLUTE MAXIMUM RATINGS (Ta = 25°C)

Symbol	Parameter	Ratings	Unit
V _{CBO}	Collector-to-Base Voltage	8	V
V _{CEO}	Collector-to-Emitter Voltage	6	V
V _{EBO}	Emitter-to-Base Voltage	2	V
Icc	Collector Current	50	mA
PC	Max Power Dissipation	280	mW
Topr	Operating Temperature	-40 to +85	°C
Tstg	Storage Temperature	-55 to +150	°C

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

RECOMMENDED OPERATING CONDITIONS (Ta = 25°C)

Symbol	Parameter	Min	Тур	Max	Unit
V _{C1E1}	Supply Voltage	1.2	3	6	V
V _{C2E1}		1.2	3	6	V
V _{C1E2}		1.2	3	6	V
V _{C2E2}		1.2	3	6	V

Functional operation above the stresses listed in the Recommended Operating Ranges is not implied. Extended exposure to stresses beyond the Recommended Operating Ranges limits may affect device reliability.




SC-88FL / MCPH6 CASE 419AS

MARKING DIAGRAM



PIN DESCRIPTION



ORDERING INFORMATION

See detailed ordering and shipping information on page 4 of this data sheet.

SMA5101

ELECTRICAL CHARACTERISTICS (Ta = 25°C)

			Ratings			
Symbol	Parameter	Conditions	Min	Тур	Max	Unit
I _{C1B1O}	Collector Cutoff Current	V _{C1B1} = 5 V	-	-	1	μΑ
I _{C2B1O}		V _{C2B1} = 5 V	-	_	1	μΑ
I _{C1B2O}		V _{C1B2} = 5 V	-	-	1	μΑ
I _{C2B2O}		V _{C2B2} = 5 V	-	-	1	μΑ
I _{E1B1O}	Emitter Cutoff Current	V _{E1B1} = 1 V	-	-	1	μΑ
I _{E2B1O}		V _{E2B1} = 1 V	-	-	1	μΑ
I _{E1B2O}		V _{E1B2} = 1 V	-	-	1	μΑ
I _{E2B2O}		V _{E2B2} = 1 V	-	-	1	μΑ
h _{FE} 1	DC Current Gain	V _{C1E1} = 1 V, I _{C1E1} = 3 mA	20	_	120	
h _{FE} 2		V _{C2E1} = 1 V, I _{C2E1} = 3 mA	20	_	120	
h _{FE} 3		V _{C1E2} = 1 V, I _{C1E2} = 3 mA	20	-	120	
h _{FE} 4		V _{C2E2} = 1 V, I _{C2E2} = 3 mA	20	-	120	
Gc	Conversion Gain (Note 1)	$V_{CC} = 5 \text{ V}, I_{CC} = 6 \text{ mA},$ f(RF) = 450 MHz, f(LO) = 500 MHz, P(RF) = -15 dBm, P(LO) = -6 dBm	-	-0.5	-	dB
IIP3	Input Intercept Point (Note 1)	$V_{CC} = 5 \text{ V}, I_{CC} = 6 \text{ mA},$ f(RF1) = 450 MHz, f(RF2) = 451 MHz, f(LO) = 500 MHz, P(RF1) = P(RF2) = -15 dBm, P(LO) = -6 dBm	-	15		dBm

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

1. On evaluation board.

Measurement Circuit

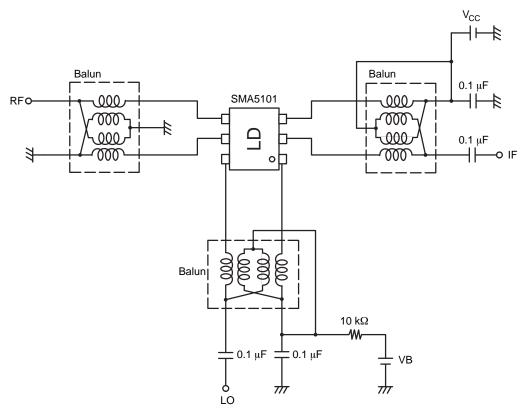


Figure 1. Measurement Circuit

Evaluation Board

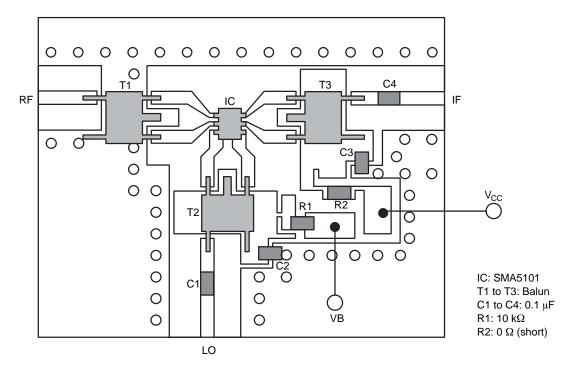


Figure 2. Evaluation Board

Circuit Example (Self Bias)

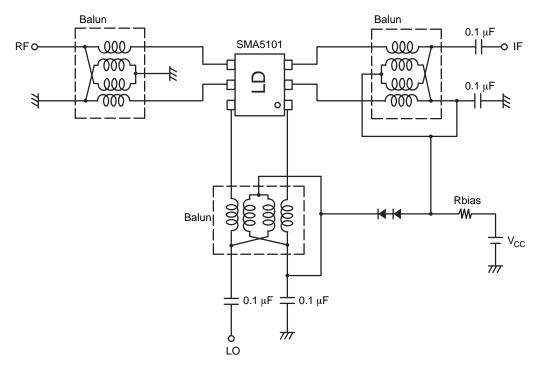


Figure 3. Circuit Example (Self Bias)

SMA5101




Figure 4. P1dB - I_{CC}




Figure 5. G_C - I_{CC}




Figure 6. IIP3 - I_{CC}

ORDERING INFORMATION

Device Order Number	Specific Device Marking	Package Type (JEITA, JEDEC)	Package Type	Shipping [†]
SMA5101-TL-H	LD	SC-88FL (Pb-Free/Halogen Free)	MCPH6 (Pb-Free/Halogen Free)	3000 / Tape & Reel

[†]For Information On Tape And Reel Specifications, Including Part Orientation And Tape Sizes, Please Refer To Our Tape And Reel Packaging Specifications Brochure, Brd8011/D.







SC-88FL / MCPH6 CASE 419AS **ISSUE A**


DATE 28 SEP 2022














NOTES:

- NO INDUSTRY STANDARD APPLIES TO THIS PACKAGE.
- ALL DIMENSIONS ARE IN MILLIMETERS.
- DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD FLASH AND THE BAR PROTRUSIONS.

DIM	MILLIMETERS			
ابالط	MIN.	N□M.	MAX.	
Α	0.80	0.85	0.90	
A1	0.00		0.02	
b	0.25	0.30	0.40	
C	0.12	0.15	0.25	
D	1.94	2.00	2.06	
Е	1.54	1.60	1.66	
He	2.05	2.10	2.15	
L	0.19	0.25	0.31	
L1	0.00	0.07	0.12	
е	0.65 BSC			

GENERIC MARKING DIAGRAM*



XXX = Specific Device Code

= Date Code М = Pb-Free Package

(Note: Microdot may be in either location)

*This information is generic. Please refer to device data sheet for actual part marking. Pb–Free indicator, "G" or microdot "■", may or may not be present. Some products may not follow the Generic Marking.

DOCUMENT NUMBER:	98AON65646E	Electronic versions are uncontrolled except when accessed directly from the Document Repository Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.		
DESCRIPTION:	SC-88FL / MCPH6		PAGE 1 OF 1	

onsemi and ONSEMI are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. **onsemi** does not convey any license under its patent rights nor the rights of others.

onsemi, Onsemi, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. Onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA class 3 medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:

 $\textbf{Technical Library:} \ \underline{www.onsemi.com/design/resources/technical-documentation}$

onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at

www.onsemi.com/support/sales