

Bridge Rectifiers GBU8A - GBU8M

Features


- Glass-Passivated Junction
- Surge Overload Rating: 200 A Peak
- Reliable Low-Cost Construction Utilizing Molded Plastic Technique
- Ideal for Printed Circuit Board
- UL Certified: UL #E258596

PACKAGE MARKING AND ORDERING INFORMATION


Part Number	Marking	Package	Packing Method
GBU8A	GBU8A	GBU 4L	Rail
GBU8B	GBU8B		
GBU8D	GBU8D		
GBU8G	GBU8G		
GBU8J	GBU8J		
GBU8K	GBU8K	1	
GBU8M	GBU8M	1	



CASE 127EL



MARKING DIAGRAM



RU = UL Marking

GBU8A

\$Y = ON Semiconductor Logo = Assembly Plant Code

&Z &3 = Numeric Date Code

= Specific Device Code

GBU8A - GBU8M

ABSOLUTE MAXIMUM RATINGS (T_A = 25°C unless otherwise noted)

			Value							
Symbol	Parameter		8A	8B	8D	8G	8J	8K	8M	Units
V_{RRM}	Maximum Repetitive Reverse Voltage		50	100	200	400	600	800	1000	٧
V_{RMS}	Maximum RMS Bridge Input Voltage		35	70	140	280	420	560	700	V
V_{R}	DC Reverse Voltage (Rated V _R)		50	100	200	400	600	800	1000	V
I _{F(AV)}	Average Rectified Forward	T _A = 100°C	8.0						Α	
	Current	T _A = 45°C	6.0						Α	
I _{FSM}	Non-Repetitive Peak Forward Surge Current 8.3 ms Single Half-Sine-Wave		200					Α		
T _{STG}	Storage Temperature Range		-55 to +150					°C		
TJ	Operating Junction Temperature		-55 to +150					°C		

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

THERMAL CHARECTERISTICS (T_A = 25°C unless otherwise noted)

Symbol	Parameter	Value	Units
P_{D}	Power Dissipation	16	W
$R_{ heta JA}$	Thermal Resistance per Leg, Junction to Ambient (Note 1)	18	°C/W
$R_{ hetaJL}$	Thermal Resistance per Leg, Junction to Case (Note 2)	3	°C/W

^{1.} Device mounted on PCB with 0.5×0.5 inch $(12 \times 12 \text{ mm})$

ELECTRICAL CHARACTERISTICS (T_J = 25°C unless otherwise noted)

Symbol	Parameter	Value	Units	
V _F	Forward Voltage, per Element	8.0 A	1.0	V
I _R	Reverse Current, per Element at Rated V _R	T _A = 25°C	5.0	μΑ
		T _A = 100°C	500	μΑ
I ² t	I ² t Rating for Fusing	t < 8.35 ms	166	A ² s

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

^{2.} Heat sink mounting, $4 \times 4 \times 0.15$ inch copper plate

GBU8A - GBU8M

TYPICAL PERFORMANCE CHARACTERISTICS




Figure 1. Forward Current Derating Curve




Figure 2. Forward Voltage Characteristics




Figure 3. Reverse Current vs. Reverse Voltage






Figure 4. Non-Repetitive Surge Current






SIP4 22.05x18.55 CASE 127EL ISSUE O

DATE 31 DEC 2016

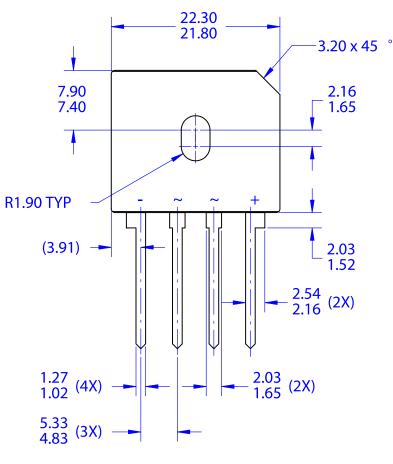

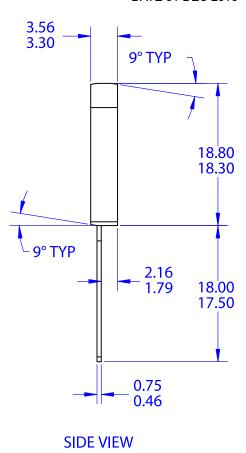

TOP VIEW

NOTES:

- A. NO INDUSTRY STANDARD APPLIES TO THIS PACKAGE
- **B. ALL DIMENSIONS ARE IN MILLIMETERS**
- C. DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD FLASH AND TIE BAR PROTRUSIONS.
- D. DIMENSIONS AND TOLERANCES AS PER ASME Y14.5-2009

DOCUMENT NUMBER:	98AON13717G	Electronic versions are uncontrolled except when accessed directly from the Document Reposito Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.			
DESCRIPTION:	SIP4 22.05x18.55		PAGE 1 OF 1		

onsemi and ONSEMI are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

onsemi, Onsemi, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. Onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA class 3 medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:

 $\textbf{Technical Library:} \ \underline{www.onsemi.com/design/resources/technical-documentation}$

onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at

www.onsemi.com/support/sales