

# **Surface Mount Schottky Power Rectifier**

# MBRS3200T3G, NRVBS3200T3G, NRVBS3200NT3G

This device employs the Schottky Barrier principle in a large area metal-to-silicon power diode. State-of-the-art geometry features epitaxial construction with oxide passivation and metal overlay contact. Ideally suited for low voltage, high frequency rectification, or as free wheeling and polarity protection diodes in surface mount applications where compact size and weight are critical to the system.

#### **Features**

- Small Compact Surface Mountable Package with J-Bend Leads
- Rectangular Package for Automated Handling
- Highly Stable Oxide Passivated Junction
- Very High Blocking Voltage 200 V
- 175°C Operating Junction Temperature
- Guard-Ring for Stress Protection
- NRVB Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements: AEC-Q101 Qualified and PPAP Capable\*
- These are Pb-Free Devices

#### **Mechanical Characteristics**


- Case: Epoxy, Molded, Epoxy Meets UL 94, V-0
- Weight: 95 mg (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead and Mounting Surface Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Cathode Polarity Band
- Device Meets MSL 1 Requirements
- ESD Ratings:
  - ◆ Machine Model = A
  - ◆ Human Body Model = 1C

# SCHOTTKY BARRIER RECTIFIER 3.0 AMPERE 200 VOLTS



SMB CASE 403A

#### MARKING DIAGRAM



B320 = Specific Device Code A = Assembly Location\*\*

Y = Year WW = Work Week ■ = Pb-Free Package

(Note: Microdot may be in either location)

#### **ORDERING INFORMATION**

Device	Package	Shipping <sup>†</sup>
MBRS3200T3G	SMB (Pb-Free)	2,500 / Tape & Reel
NRVBS3200NT3G*	SMB (Pb-Free)	2,500 / Tape & Reel

#### **DISCONTINUED** (Note 1)

NRVBS3200T3G*	SMB	2,500 /	
	(Pb-Free)	Tape & Reel	

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specification Brochure, BRD8011/D.

 DISCONTINUED: This device is not recommended for new design. Please contact your onsemi representative for information. The most current information on this device may be available on www.onsemi.com.

<sup>\*\*</sup>The Assembly Location code (A) is front side optional. In cases where the Assembly Location is stamped in the package bottom (molding ejecter pin), the front side assembly code may be blank.

## MBRS3200T3G, NRVBS3200T3G, NRVBS3200NT3G

#### **MAXIMUM RATINGS**

Rating	Symbol	Value	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V <sub>RRM</sub> V <sub>RWM</sub> V <sub>R</sub>	200	V
Average Rectified Forward Current (T <sub>L</sub> = 150 °C)	I <sub>F(AV)</sub>	3.0	А
Non-Repetitive Peak Surge Current (Surge Applied at Rated Load Conditions Halfwave, Single Phase, 60 Hz)	I <sub>FSM</sub>	100	А
Operating Junction Temperature	TJ	-65 to +175	°C

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

#### THERMAL CHARACTERISTICS

Characteristic	Symbol	Value	Unit
Thermal Resistance, Junction–to–Lead (Note 1) Thermal Resistance, Junction–to–Ambient (Note 2)	$R_{ hetaJL} \ R_{ hetaJA}$	13 62	°C/W

#### **ELECTRICAL CHARACTERISTICS**

Maximum Instantaneous Forward Voltage (Note 3) ( $I_F = 3.0 \text{ A}, T_J = 25^{\circ}\text{C}$ ) ( $I_F = 4.0 \text{ A}, T_J = 25^{\circ}\text{C}$ ) ( $I_F = 3.0 \text{ A}, T_J = 150^{\circ}\text{C}$ )	V <sub>F</sub>	0.84 0.86 0.59	V
Maximum Instantaneous Reverse Current (Note 3) (Rated dc Voltage, $T_J = 25^{\circ}C$ ) (Rated dc Voltage, $T_J = 150^{\circ}C$ )	I <sub>R</sub>	1.0 5.0	mA mA

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

- 1. Minimum pad size  $(0.108 \times 0.085)$  inch) for each lead on FR4 board.
- 2. 1 inch square pad size  $(1 \times 0.5)$  inch) for each lead on FR4 board.
- 3. Pulse Test: Pulse Width = 300  $\mu$ s, Duty Cycle  $\leq$  2.0%.




Figure 1. Typical Forward Voltage




Figure 2. Maximum Forward Voltage

## MBRS3200T3G, NRVBS3200T3G, NRVBS3200NT3G

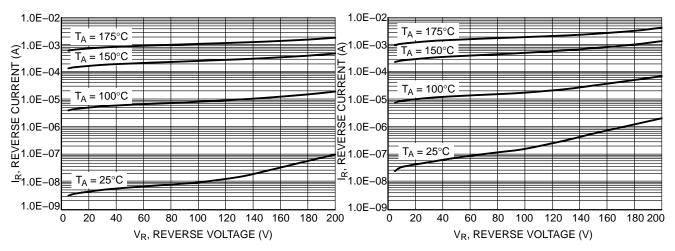


Figure 3. Typical Reverse Current

Figure 4. Maximum Reverse Current

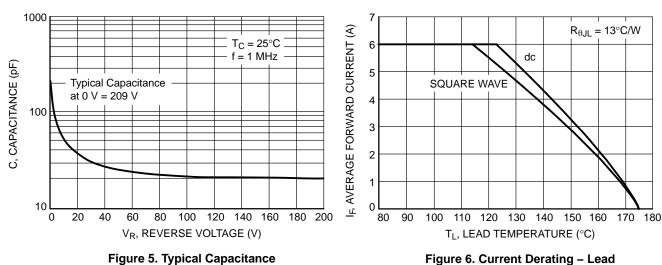


Figure 5. Typical Capacitance




Figure 8. Typical Non-repetitive Surge Current





Figure 7. Forward Power Dissipation



www.onsemi.com











**SMB** CASE 403A-03 **ISSUE J** 


**DATE 19 JUL 2012** 

**Polarity Band** 


SCALE 1:1 Non-Polarity Band







#### **SOLDERING FOOTPRINT\***




\*For additional information on our Pb-Free strategy and soldering details, please download the onsemi Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

#### NOTES:

- 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982. 2. CONTROLLING DIMENSION: INCL.
- CONTROLLING DIMENSION: INCH.
  DIMENSION b SHALL BE MEASURED WITHIN DIMENSION L1.

	MILLIMETERS			INCHES		
DIM	MIN	NOM	MAX	MIN	NOM	MAX
Α	1.95	2.30	2.47	0.077	0.091	0.097
A1	0.05	0.10	0.20	0.002	0.004	0.008
b	1.96	2.03	2.20	0.077	0.080	0.087
С	0.15	0.23	0.31	0.006	0.009	0.012
D	3.30	3.56	3.95	0.130	0.140	0.156
E	4.06	4.32	4.60	0.160	0.170	0.181
HE	5.21	5.44	5.60	0.205	0.214	0.220
L	0.76	1.02	1.60	0.030	0.040	0.063
L1		0.51 REF			0.020 REF	

#### **GENERIC MARKING DIAGRAM\***





**Polarity Band** 

Non-Polarity Band

XXXXX = Specific Device Code = Assembly Location

= Year WW = Work Week = Pb-Free Package

(Note: Microdot may be in either location)

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "■", may or may not be present. Some products may not follow the Generic Marking.

DOCUMENT NUMBER:	98ASB42669B	Electronic versions are uncontrolled except when accessed directly from the Document Reposito Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.		
DESCRIPTION:	SMB		PAGE 1 OF 1	

onsemi and ONSEMI are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves brisefin and of 160 m are trademarked so defined values of services and of the confined values and of the values of the confined values and of the values of the confined values and of the values of the v special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

onsemi, Onsemi, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at <a href="www.onsemi.com/site/pdf/Patent-Marking.pdf">www.onsemi.com/site/pdf/Patent-Marking.pdf</a>. Onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA class 3 medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase

#### ADDITIONAL INFORMATION

**TECHNICAL PUBLICATIONS:** 

 $\textbf{Technical Library:} \ \underline{www.onsemi.com/design/resources/technical-documentation}$ 

onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at

www.onsemi.com/support/sales