IGBT

This Insulated Gate Bipolar Transistor (IGBT) features a robust and cost effective Field Stop (FS) Trench construction, and provides superior performance in demanding switching applications, offering both low on–state voltage and minimal switching loss. The IGBT is well suited for resonant or soft switching applications. Incorporated into the device is a rugged co–packaged free wheeling diode with a low forward voltage.

Features

- Low Saturation Voltage using Trench with Field Stop Technology
- Low Switching Loss Reduces System Power Dissipation
- Optimized for Low Case Temperature in IH Cooker Application
- Low Gate Charge
- These are Pb-Free Devices

Typical Applications

- Inductive Heating
- Consumer Appliances
- Soft Switching

ABSOLUTE MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector-emitter voltage	V_{CES}	1200	V
Collector current @ Tc = 25°C @ Tc = 100°C	I _C	80 40	A
Pulsed collector current, T _{pulse} limited by T _{Jmax}	I _{CM}	320	Α
Diode forward current @ Tc = 25°C @ Tc = 100°C	I _F	80 40	A
Diode pulsed current, T _{pulse} limited by T _{Jmax}	I _{FM}	320	Α
Gate-emitter voltage	V_{GE}	±20	V
Power Dissipation @ Tc = 25°C @ Tc = 100°C	P _D	260 104	W
Operating junction temperature range	TJ	–55 to +150	°C
Storage temperature range	T _{stg}	-55 to +150	°C
Lead temperature for soldering, 1/8" from case for 5 seconds	T _{SLD}	260	°C


Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.




ON Semiconductor®

http://onsemi.com

40 A, 1200 V V_{CEsat} = 1.90 V E_{off} = 1.40 mJ





MARKING DIAGRAM



A = Assembly Location

Y = Year WW = Work Week G = Pb-Free Package

ORDERING INFORMATION


Device	Package	Shipping
NGTB40N120IHLWG	TO-247 (Pb-Free)	30 Units / Rail

THERMAL CHARACTERISTICS

Rating	Symbol	Value	Unit
Thermal resistance junction-to-case, for IGBT	$R_{ heta JC}$	0.48	°C/W
Thermal resistance junction-to-case, for Diode	$R_{ heta JC}$	1.5	°C/W
Thermal resistance junction-to-ambient	$R_{ heta JA}$	40	°C/W

ELECTRICAL CHARACTERISTICS ($T_J = 25^{\circ}C$ unless otherwise specified)

Parameter	Test Conditions	Symbol	Min	Тур	Max	Unit
STATIC CHARACTERISTIC	•			•		•
Collector-emitter breakdown voltage, gate-emitter short-circuited	$V_{GE} = 0 \text{ V}, I_{C} = 500 \mu\text{A}$	V _{(BR)CES}	1200	_	-	V
Collector-emitter saturation voltage	V _{GE} = 15 V, I _C = 40 A V _{GE} = 15 V, I _C = 40 A, T _J = 150°C	V _{CEsat}	- -	1.90 2.1	2.35	V
Gate-emitter threshold voltage	V _{GE} = V _{CE} , I _C = 400 μA	V _{GE(th)}	4.5	5.5	6.5	V
Collector-emitter cut-off current, gate- emitter short-circuited	$V_{GE} = 0 \text{ V}, V_{CE} = 1200 \text{ V}$ $V_{GE} = 0 \text{ V}, V_{CE} = 1200 \text{ V}, T_{J=150^{\circ}C}$	I _{CES}	- -	_ _	0.5 2.0	mA
Gate leakage current, collector-emitter short-circuited	V _{GE} = 20 V, V _{CE} = 0 V	I _{GES}	-	_	200	nA
DYNAMIC CHARACTERISTIC	•					•
Input capacitance		C _{ies}	-	10400	_	pF
Output capacitance	V _{CE} = 20 V, V _{GE} = 0 V, f = 1 MHz	C _{oes}	-	245	-	
Reverse transfer capacitance	1	C _{res}	-	185	=	
Gate charge total		Q_g		420		nC
Gate to emitter charge	V _{CE} = 600 V, I _C = 40 A, V _{GE} = 15 V	Q _{ge}		95		
Gate to collector charge]	Q _{gc}		178		
SWITCHING CHARACTERISTIC, INDUC	TIVE LOAD					
Turn-off delay time	T _J = 25°C	t _{d(off)}		360		ns
Fall time	$V_{CC} = 600 \text{ V}, I_{C} = 40 \text{ A}$ $R_{g} = 10 \Omega$	t _f		130		
Turn-off switching loss	V _{GE} = 0 V/ 15V	E _{off}		1.40		mJ
Turn-off delay time	T _J = 125°C	t _{d(off)}		380		ns
Fall time	$V_{CC} = 600 \text{ V, I}_{C} = 40 \text{ A}$ $R_{a} = 10 \Omega$	t _f		185		
Turn-off switching loss	V _{GE} = 0 V/ 15V	E _{off}		2.6		mJ
DIODE CHARACTERISTIC						
Forward voltage	V _{GE} = 0 V, I _F = 40 A V _{GE} = 0 V, I _F = 40 A, T _J = 150°C	V _F		1.6 1.8	1.8	V

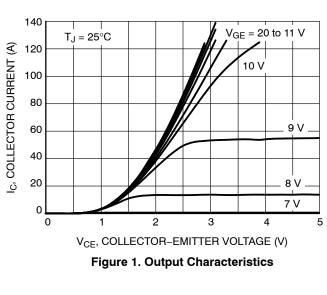

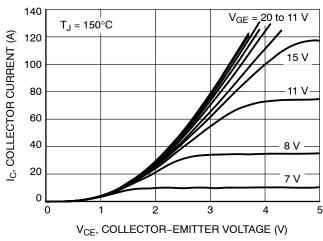
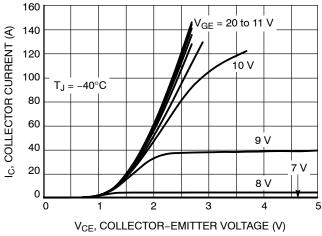


Figure 2. Output Characteristics



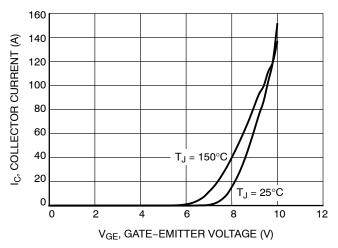
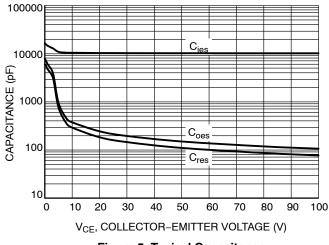


Figure 3. Output Characteristics

Figure 4. Typical Transfer Characteristics




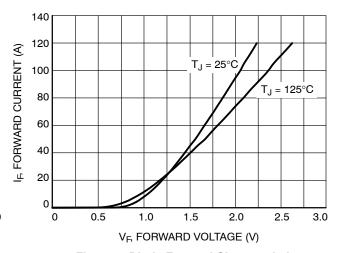


Figure 5. Typical Capacitance


Figure 6. Diode Forward Characteristics

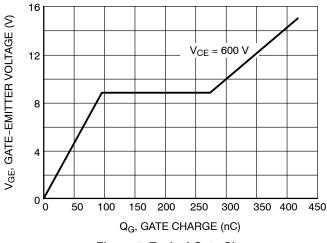

(m) 3.5 V_{CE} = 600 V Eoff, TURN-OFF SWITCHING LOSS 3 $V_{GE} = 15 V$ $I_{C} = 40 \text{ A}$ 2.5 $Rg = 10 \Omega$ 2 1.5 0.5 0 0 140 100 120 T_J, JUNCTION TEMPERATURE (°C)

Figure 7. Typical Gate Charge

Figure 8. Energy Loss vs. Temperature

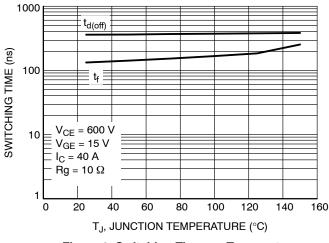

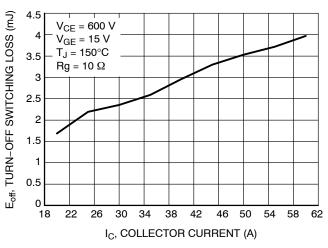
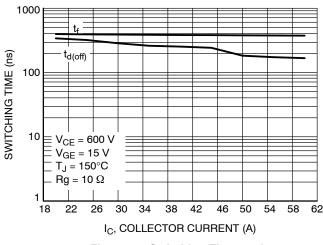


Figure 9. Switching Time vs. Temperature

Figure 10. Energy Loss vs. I_C



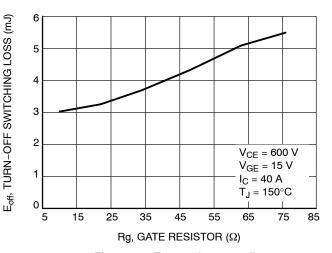


Figure 11. Switching Time vs. I_C

Figure 12. Energy Loss vs. Rg

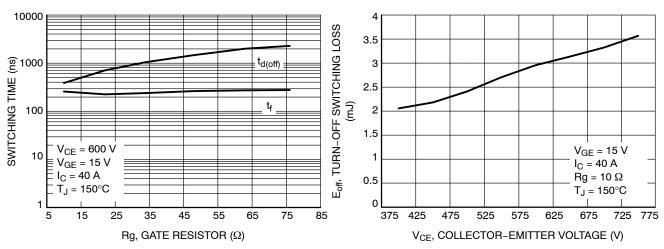


Figure 13. Switching Time vs. Rg

Figure 14. Energy Loss vs. V_{CE}

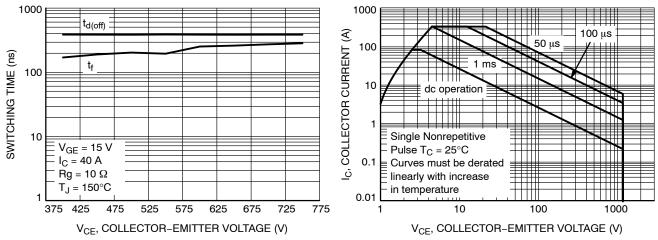


Figure 15. Switching Time vs. V_{CE}

Figure 16. Safe Operating Area

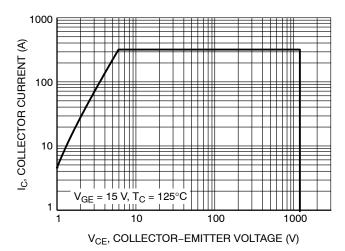


Figure 17. Reverse Bias Safe Operating Area

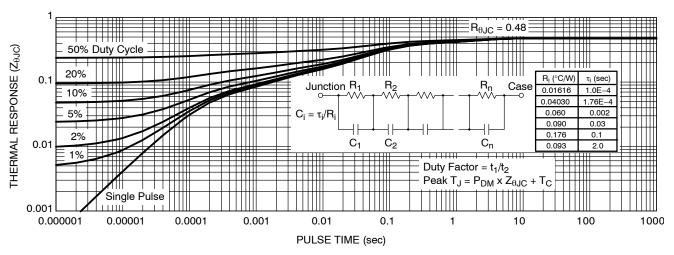


Figure 18. IGBT Transient Thermal Impedance

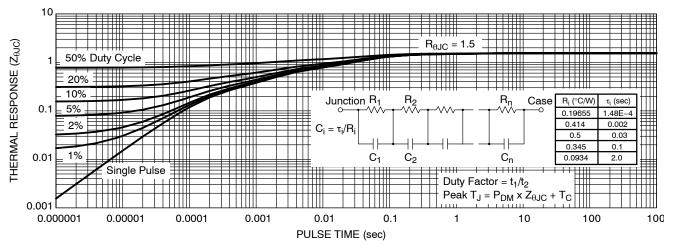


Figure 19. Diode Transient Thermal Impedance

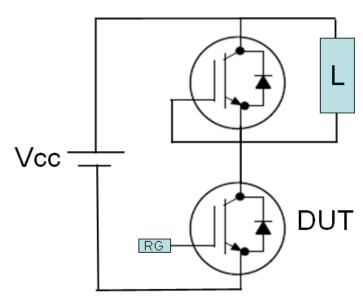


Figure 20. Test Circuit for Switching Characteristics


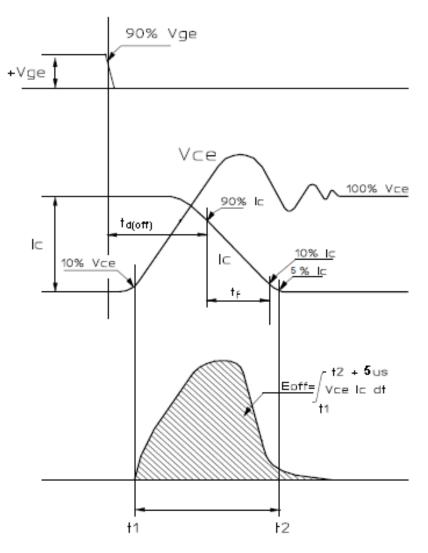


Figure 21. Definition of Turn Off Waveform





TO-247 CASE 340L ISSUE G

DATE 06 OCT 2021


NOTES

- 1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1982.
- 2. CONTROLLING DIMENSION: MILLIMETER

	MILLIMETERS		INC	HES
DIM	MIN.	MAX.	MIN.	MAX.
Α	20.32	21.08	0.800	0.830
В	15.75	16.26	0.620	0.640
С	4.70	5.30	0.185	0.209
D	1.00	1.40	0.040	0.055
Ε	1.90	2.60	0.075	0.102
F	1.65	2.13	0.065	0.084
G	5.45 BSC		0.215 BSC	
Н	1.50	2.49	0.059	0.098
J	0.40	0.80	0.016	0.031
К	19.81	20.83	0.780	0.820
L	5.40	6.20	0.212	0.244
N	4.32	5.49	0.170	0.216
Р		4.50		0.177
Q	3.55	3.65	0.140	0.144
U	6.15	6.15 BSC		BSC
W	2.87	3.12	0.113	0.123

⊕ 0.25 (0.010)**W** Y AS

GENERIC MARKING DIAGRAM*



PIN 1. MAIN TERMINAL 1 2. MAIN TERMINAL 2

3. GATE 4. MAIN TERMINAL 2 XXXXX = Specific Device Code
A = Assembly Location
Y = Year
WW = Work Week
G = Pb-Free Package

*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "•", may or may not be present. Some products may not follow the Generic Marking.

DOCUMENT NUMBER:	98ASB15080C	Electronic versions are uncontrolled except when accessed directly from the Document Reposito Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.		
DESCRIPTION:	TO-247		PAGE 1 OF 1	

onsemi and ONSEMI are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

STYLE 5: PIN 1. CATHODE

2. ANODE

3. GATE 4. ANODE

onsemi, ONSEMI., and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems. or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:

 $\textbf{Technical Library:} \ \underline{www.onsemi.com/design/resources/technical-documentation}$

onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at

www.onsemi.com/support/sales