1.5 A, 40 V Schottky Barrier Diode

These Schottky barrier diodes are optimized for low forward voltage drop and low leakage current and are offered in a Chip Scale Package (CSP) to reduce board space. The low thermal resistance enables designers to meet the challenging task of achieving higher efficiency and meeting reduced space requirements.

Features

- Low Forward Voltage Drop 540 mV (Typ.) @ $I_F = 1.5 A$
- Low Reverse Current 20 μ A (Typ.) @ $V_R = 40 \text{ V}$
- 1.5 A of Continuous Forward Current
- ESD Rating Human Body Model: Class 3B
 - Machine Model: Class C
- High Switching Speed
- These Devices are Pb–Free, Halogen Free/BFR Free and are RoHS Compliant

Typical Applications

- LCD and Keypad Backlighting
- Camera Photo Flash
- Buck and Boost dc-dc Converters
- Reverse Voltage and Current Protection
- Clamping & Protection

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Reverse Voltage	V_R	40	V
Forward Current (DC)	lF	1.5	Α
Forward Surge Current (60 Hz @ 1 cycle)	I _{FSM}	13	Α
Repetitive Peak Forward Current (Pulse Wave = 1 sec, Duty Cycle = 66%)	I _{FRM}	3	Α
ESD Rating: Human Body Model Machine Model	ESD	> 8 > 400	kV V

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.



ON Semiconductor®

www.onsemi.com



MARKING DIAGRAM

DSN2 (0502) CASE 152AU PIN 1

5GM

5G = Specific Device Code M = Date Code

PIN CONNECTIONS



ORDERING INFORMATION

Device	Package	Shipping [†]
NSR15405NXT5G	DSN2 (Pb-Free)	5000 / Tape & Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

THERMAL CHARACTERISTICS

Characteristic	Symbol	Min	Тур	Max	Unit
Thermal Resistance Junction-to-Ambient (Note 1) Total Power Dissipation @ T _A = 25°C	R _{θJA} P _D			255 490	°C/W mW
Thermal Resistance Junction-to-Ambient (Note 2) Total Power Dissipation @ T _A = 25°C	R _{θJA} P _D			95 1.32	°C/W W
Storage Temperature Range	T _{stg}			-40 to +125	°C
Junction Temperature	TJ			+150	°C

- 1. Mounted onto a 4 in square FR-4 board 50 mm sq. 1 oz. Cu 0.06" thick single sided. Operating to steady state.
- 2. Mounted onto a 4 in square FR-4 board 650 mm sq. 1 oz. Cu 0.06" thick single sided. Operating to steady state.

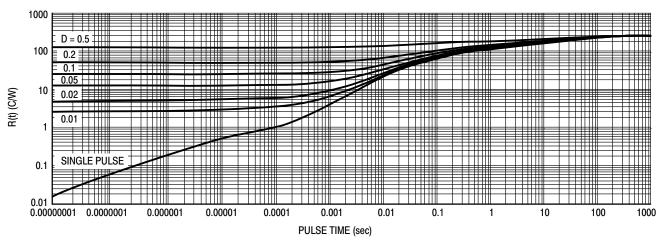


Figure 1. Thermal Response (Note 1)


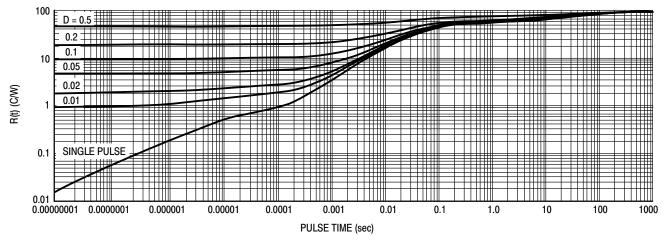


Figure 2. Thermal Response (Note 2)

ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Тур	Max	Unit
Reverse Leakage (V _R = 10 V) (V _R = 40 V)	I _R	_ _	2 20	10 75	μА
Forward Voltage (I _F = 10 mA) (I _F = 100 mA) (I _F = 500 mA) (I _F = 1 A) (I _F = 1.5 A)	V _F	- - - -	250 320 410 480 540	290 360 450 520 590	mV
Total Capacitance (V _R = 2.0 V, f = 1.0 MHz)	C _T	_	85	-	pF
Reverse Recovery Time ($I_F = I_R = 10 \text{ mA}$, $I_{R(REC)} = 1.0 \text{ mA}$, Figure 3)	t _{rr}	-	33	-	ns
Peak Forward Recovery Voltage (I _F = 100 mA, t _r = 20 ns, Figure 4)	V_{FRM}	_	460	-	mV

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

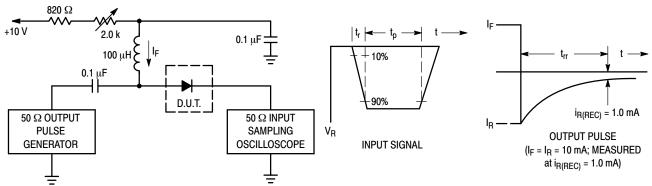

Notes: 1. A 2.0 k Ω variable resistor adjusted for a Forward Current (I_F) of 10 mA.

2. Input pulse is adjusted so $I_{R(peak)}$ is equal to 10 mA.

3. t_p » t_{rr}

Figure 3. Recovery Time Equivalent Test Circuit

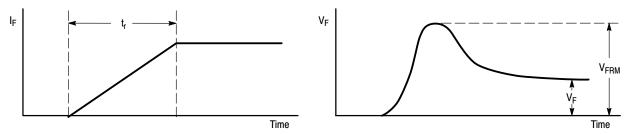


Figure 4. Peak Forward Recover Voltage Definition

TYPICAL CHARACTERISTICS





Figure 5. Forward Voltage

Figure 6. Leakage Current








Figure 7. Average Forward Power Dissipation

Figure 8. Average Reverse Power Dissipation








Figure 10. Forward Surge Maximum



PIN 1 INDICATOR

0.05 0.05 C

0.05 C 0.05 C



DSN2, 1.4x0.6, 1.00P (0502) CASE 152AU **ISSUE A**

DATE 08 JUN 2016




- DIMENSIONING AND TOLERANCING PER ASME Y14.5M. 1994.
- 2. CONTROLLING DIMENSION: MILLIMETERS.

	MILLIMETERS			
DIM	MIN	MAX		
Α	0.25	0.31		
A1	0.00	0.05		
b	0.45	0.55		
D	1.40 BSC			
Е	0.60 BSC			
е	1.00 BSC			
L	0.20 0.30			

TOP VIEW SIDE VIEW

A B





GENERIC

XXXX YYY

GENERIC


XXM

XXXX = Specific Device Code YYY = Year Code

XX = Specific Device Code M = Date Code

*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G", may or not be present.

CATHODE BAND MONTH CODING




INDICATES AUG 2009

	┌	2X k)			
前主前		\oplus	0.05	С	Α	В
	A					
→ -	← 2X	L				
BOTTOM VIEW						

RECOMMENDED **MOUNTING FOOTPRINT***

–D⊸



See Application Note AND8464/D for more mounting details

*For additional information on our Pb-Free strategy and soldering details, please download the onsemi Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

DOCUMENT NUMBER:	98AON79730F	Electronic versions are uncontrolled except when accessed directly from the Document Reposi Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.		
DESCRIPTION:	DSN2, 1.4X0.6, 1.00P (0502	2)	PAGE 1 OF 1	

onsemi and Onsemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries, onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

onsemi, Onsemi, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. Onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA class 3 medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:

 $\textbf{Technical Library:} \ \underline{www.onsemi.com/design/resources/technical-documentation}$

onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at

www.onsemi.com/support/sales