# **MOSFET** – Power, **N-Channel** 100 V, 23 A, 55 mΩ

### **Features**

- Low R<sub>DS(on)</sub>
- High Current Capability
- 100% Avalanche Tested
- NVD Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable
- These Devices are Pb-Free and are RoHS Compliant

### **MAXIMUM RATINGS** (T<sub>J</sub> = 25°C unless otherwise noted)

Parameter			Symbol	Value	Unit
Drain-to-Source Voltage			V <sub>DSS</sub>	100	V
Gate-to-Source Voltage - Continuous			V <sub>GS</sub>	±20	V
Continuous Drain	Steady State	T <sub>C</sub> = 25°C	I <sub>D</sub>	23	Α
Current R <sub>θJC</sub>	State	T <sub>C</sub> = 100°C		16	
Power Dissipation $R_{\theta JC}$	Steady State	T <sub>C</sub> = 25°C	P <sub>D</sub>	83	V
Pulsed Drain Current	t <sub>p</sub>	= 10 μs	I <sub>DM</sub>	89	Α
Operating and Storage Temperature Range			T <sub>J</sub> , T <sub>stg</sub>	-55 to +175	°C
Source Current (Body	Source Current (Body Diode)			23	Α
Single Pulse Drain-to-Source Avalanche Energy ( $V_{DD}$ = 50 Vdc, $V_{GS}$ = 10 Vdc, $I_{L(pk)}$ = 23 A, L = 0.3 mH, $R_G$ = 25 $\Omega$ )			E <sub>AS</sub>	79	mJ
Lead Temperature for Soldering Purposes, 1/8" from Case for 10 Seconds			TL	260	°C

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

### THERMAL RESISTANCE RATINGS

Parameter	Symbol	Max	Unit
Junction-to-Case (Drain) Steady State	$R_{\theta JC}$	1.8	°C/W
Junction-to-Ambient (Note 1)	$R_{\theta JA}$	39	


1. Surface mounted on FR4 board using 1 sq in pad size, (Cu Area 1.127 sq in [2 oz] including traces).



### ON Semiconductor®

### http://onsemi.com

V <sub>(BR)DSS</sub>	R <sub>DS(on)</sub> MAX	I <sub>D</sub> MAX (Note 1)
100 V	55 mΩ @ 10 V	23 A










**IPAK** CASE 369D STYLE 2

### **MARKING DIAGRAM** & PIN ASSIGNMENTS



= Assembly Location\*

= Year WW = Work Week 6415AN = Device Code = Pb-Free Package

\* The Assembly Location code (A) is front side optional. In cases where the Assembly Location is stamped in the package, the front side assembly code may be blank.

### **ORDERING INFORMATION**

See detailed ordering and shipping information on page 5 of this data sheet.

### **ELECTRICAL CHARACTERISTICS** (T<sub>J</sub> = 25°C unless otherwise noted)

Parameter	Symbol	Test Conditi	on	Min	Тур	Max	Unit
OFF CHARACTERISTICS	•		-		•	•	
Drain-to-Source Breakdown Voltage	V <sub>(BR)DSS</sub>	$V_{GS} = 0 \text{ V}, I_D = 250 \mu\text{A}$		100			V
Drain-to-Source Breakdown Voltage Temperature Coefficient	V <sub>(BR)DSS</sub> /T <sub>J</sub>				113		mV/°C
Zero Gate Voltage Drain Current	I <sub>DSS</sub>	V <sub>GS</sub> = 0 V,	T <sub>J</sub> = 25°C			1.0	μΑ
		$V_{DS} = 100 \text{ V}$	T <sub>J</sub> = 125°C			100	
Gate-to-Source Leakage Current	I <sub>GSS</sub>	$V_{DS} = 0 \text{ V}, V_{GS} = \pm 20 \text{ V}$				±100	nA
ON CHARACTERISTICS (Note 3)	•		-		•	•	
Gate Threshold Voltage	V <sub>GS(TH)</sub>	$V_{GS} = V_{DS}, I_D = 2$	250 μΑ	2.0		4.0	V
Negative Threshold Temperature Coefficient	V <sub>GS(TH)</sub> /T <sub>J</sub>				7.6		mV/°C
Drain-to-Source On-Resistance	R <sub>DS(on)</sub>	V <sub>GS</sub> = 10 V, I <sub>D</sub> =	23 A		47	55	mΩ
Forward Transconductance	9FS	V <sub>GS</sub> = 5 V, I <sub>D</sub> =	10 A		13		S
CHARGES, CAPACITANCES AND GA	TE RESISTANO	CE				•	
Input Capacitance	C <sub>ISS</sub>	V <sub>GS</sub> = 0 V, f = 1.0 MHz, V <sub>DS</sub> = 25 V			700		pF
Output Capacitance	C <sub>OSS</sub>				110		
Reverse Transfer Capacitance	C <sub>RSS</sub>				52		
Total Gate Charge	Q <sub>G(TOT)</sub>				29		nC
Threshold Gate Charge	Q <sub>G(TH)</sub>		•		1.2		
Gate-to-Source Charge	$Q_{GS}$	$V_{GS} = 10 \text{ V}, V_{DS} = 80$	V, I <sub>D</sub> = 23 A		5		
Gate-to-Drain Charge	$Q_{GD}$		•		14.6		
Plateau Voltage	$V_{GP}$				5.7		V
Gate Resistance	$R_{G}$				2.3		Ω
SWITCHING CHARACTERISTICS (Not	e 4)		-				
Turn-On Delay Time	t <sub>d(on)</sub>				10		ns
Rise Time	t <sub>r</sub>	$V_{GS}$ = 10 V, $V_{DD}$	= 80 V,		37		
Turn-Off Delay Time	t <sub>d(off)</sub>	$I_D = 23 \text{ A}, R_G =$	6.1 Ω		30		
Fall Time	t <sub>f</sub>				37		
DRAIN-SOURCE DIODE CHARACTER	RISTICS						
Forward Diode Voltage	$V_{SD}$	$V_{GS} = 0 \text{ V}, I_S = 23 \text{ A}$ $T_J = 25^{\circ}\text{C}$ $T_J = 125^{\circ}\text{C}$			0.83	1.2	V
					0.68		
Reverse Recovery Time	t <sub>RR</sub>				65		ns
Charge Time	Ta	$V_{GS} = 0 \text{ V, dI}_S/\text{dt} = 0$	100 A/μs,		46		
Discharge Time	T <sub>b</sub>	l <sub>S</sub> = 23 A			19		
Reverse Recovery Charge	Q <sub>RR</sub>				176		nC

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics for the listed test conditions.

2. Surface mounted on FR4 board using 1 in sq pad size (Cu area = 1.127 in sq [1 oz] including traces).

3. Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2%.

4. Switching characteristics are independent of operating junction temperatures.



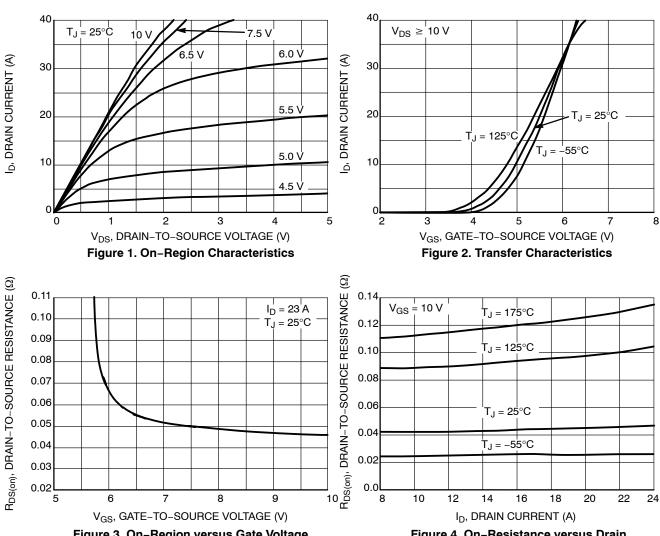


Figure 3. On-Region versus Gate Voltage

Figure 4. On-Resistance versus Drain **Current and Gate Voltage** 

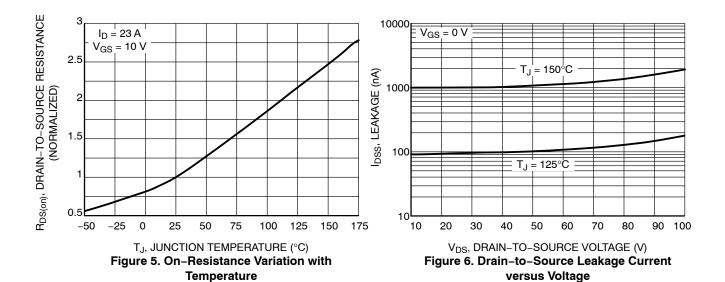

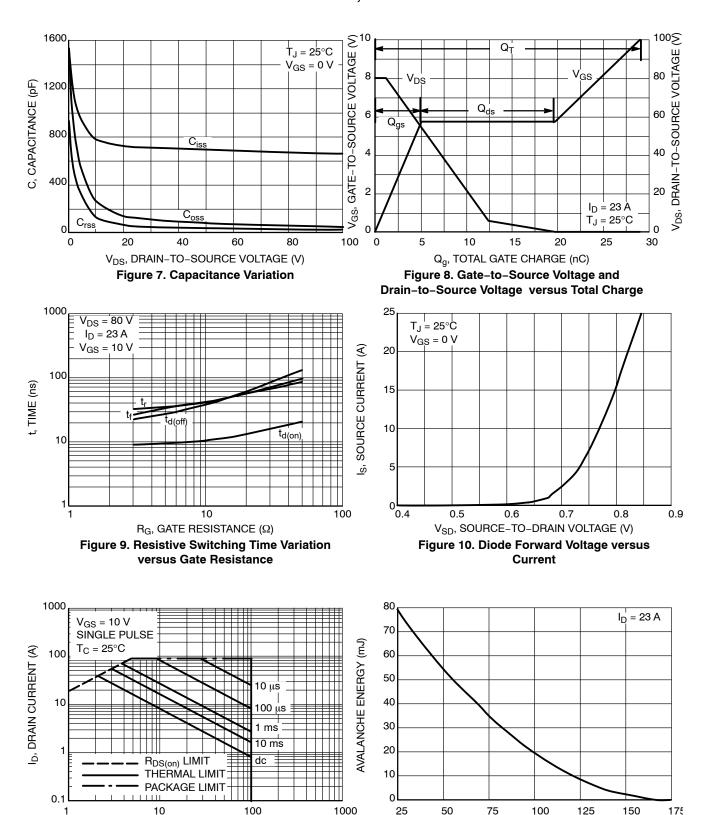

V<sub>DS</sub>, DRAIN-TO-SOURCE VOLTAGE (V)

Figure 11. Maximum Rated Forward Biased

Safe Operating Area

T<sub>J</sub>, STARTING JUNCTION TEMPERATURE

Figure 12. Maximum Avalanche Energy versus

Starting Junction Temperature

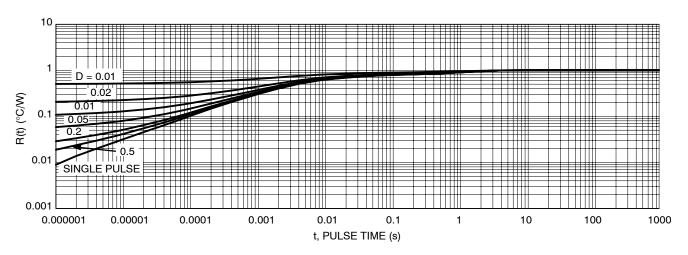


Figure 13. Thermal Response

#### **ORDERING INFORMATION**


Device	Package	Shipping†
NTD6415ANT4G	DPAK (Pb-Free)	2500 / Tape & Reel
NTD6415AN-1G	IPAK (Pb-Free)	75 Units / Rail
NVD6415ANT4G*	DPAK (Pb-Free)	2500 / Tape & Reel

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specification Brochure, BRD8011/D.

<sup>\*</sup>NVD Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable.

# MECHANICAL CASE OUTLINE





STYLE 3: PIN 1. ANODE

2. CATHODE

4. CATHODE


3 ANODE

STYLE 7: PIN 1. GATE 2. COLLECTOR

3. EMITTER

COLLECTOR

**DATE 15 DEC 2010** 

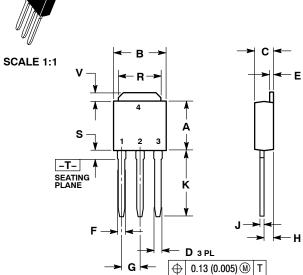

STYLE 2:

PIN 1. GATE

3

STYLE 6: PIN 1. MT1 2. MT2 3. GATE

2. DRAIN

4. DRAIN

MT2

SOURCE

STYLE 1: PIN 1. BASE

3

STYLE 5: PIN 1. GATE


2. ANODE 3. CATHODE

ANODE

2. COLLECTOR

**EMITTER** 

COLLECTOR



#### NOTES:

- DIMENSIONING AND TOLERANCING PER
- ANSI Y14.5M, 1982.
  2. CONTROLLING DIMENSION: INCH.

	INCHES		MILLIN	IETERS
DIM	MIN	MAX	MIN	MAX
Α	0.235	0.245	5.97	6.35
В	0.250	0.265	6.35	6.73
С	0.086	0.094	2.19	2.38
D	0.027	0.035	0.69	0.88
E	0.018	0.023	0.46	0.58
F	0.037	0.045	0.94	1.14
G	0.090	BSC	2.29 BSC	
Н	0.034	0.040	0.87	1.01
J	0.018	0.023	0.46	0.58
K	0.350	0.380	8.89	9.65
R	0.180	0.215	4.45	5.45
S	0.025	0.040	0.63	1.01
٧	0.035	0.050	0.89	1.27
Z	0.155		3.93	

### MARKING DIAGRAMS

STYLE 4:
PIN 1. CATHODE
2. ANODE
3. GATE
4. ANODE
Discrete

XXXXX

ALYWW

XXXXXXXX

X

xxxxxxxxx = Device Code
A = Assembly Location
IL = Wafer Lot
Y = Year
WW = Work Week

	IPAK (DPAK INSERTION MOUNT)		
DOCUMENT NUMBER: 9	98AON10528D Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.		

ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.




# **DPAK (SINGLE GUAGE)** CASE 369AA **ISSUE B** SCALE 1:1 C

**DATE 03 JUN 2010** 

#### NOTES:

- 1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
- 2. CONTROLLING DIMENSION: INCHES.
  3. THERMAL PAD CONTOUR OPTIONAL WITHIN DI-
- MENSIONS b3, L3 and Z.
  4. DIMENSIONS D AND E DO NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR BURRS. MOLD FLASH, PROTRUSIONS, OR GATE BURRS SHALL NOT EXCEED 0.006 INCHES PER SIDE
- DIMENSIONS D AND E ARE DETERMINED AT THE OUTERMOST EXTREMES OF THE PLASTIC BODY.
- 6. DATUMS A AND B ARE DETERMINED AT DATUM PLANE H.

	INCHES		MILLIN	IETERS
DIM	MIN	MAX	MIN	MAX
Α	0.086	0.094	2.18	2.38
A1	0.000	0.005	0.00	0.13
b	0.025	0.035	0.63	0.89
b2	0.030	0.045	0.76	1.14
b3	0.180	0.215	4.57	5.46
С	0.018	0.024	0.46	0.61
c2	0.018	0.024	0.46	0.61
D	0.235	0.245	5.97	6.22
E	0.250	0.265	6.35	6.73
е	0.090	90 BSC 2.29		BSC
Н	0.370	0.410	9.40	10.41
L	0.055	0.070	1.40	1.78
L1	0.108	REF	2.74 REF	
L2	0.020	BSC	0.51	BSC
L3	0.035	0.050	0.89	1.27
L4		0.040		1.01
Z	0.155		3.93	

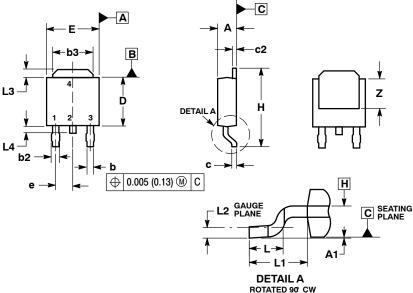

# STYLE 1: PIN 1. BASE

PIN 1. GATE 2. ANODE 3. CATHODE

4. ANODE

STYLE 5:

2. COLLECTOR 3. EMITTER 4. COLLECTOR

# STYLE 2: PIN 1. GATE

2. DRAIN 3. SOURCE 4. DRAIN

# STYLE 3:

PIN 1. ANODE 2. CATHODE 3. ANODE CATHODE

# STYLE 4: PIN 1. CATHODE 2. ANODE 3. GATE


STYLE 7:

## STYLE 6: PIN 1. MT1 2. MT2

3. GATE


#### PIN 1. GATE 2. COLLECTOR 3. EMITTER COLLECTOR

### **SOLDERING FOOTPRINT\***

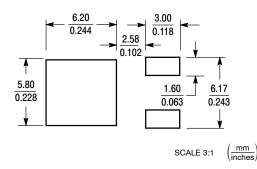

<sup>\*</sup>For additional information on our Pb-Free strategy and soldering details, please download the onsemi Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

### **GENERIC** MARKING DIAGRAM\*



XXXXXX = Device Code Α = Assembly Location L = Wafer Lot ٧ = Year = Work Week WW = Pb-Free Package

DOCUMENT NUMBER:	98AON13126D	Electronic versions are uncontrolled except when accessed directly from the Document Report Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.	
DESCRIPTION:	DPAK (SINGLE GAUGE)		PAGE 1 OF 1

onsemi and Onsemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries, onsemi reserves the right to make changes without further notice to any products herein. **onsemi** makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

<sup>\*</sup>This information is generic. Please refer to device data sheet for actual part

onsemi, Onsemi, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at <a href="www.onsemi.com/site/pdf/Patent-Marking.pdf">www.onsemi.com/site/pdf/Patent-Marking.pdf</a>. Onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA class 3 medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase

#### ADDITIONAL INFORMATION

**TECHNICAL PUBLICATIONS:** 

 $\textbf{Technical Library:} \ \underline{www.onsemi.com/design/resources/technical-documentation}$ 

onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at

www.onsemi.com/support/sales