

MOSFET - Power, Dual, N-Channel, TSOP-6

20 V, 3.5 A

NTGD3148N

Features

- Low Threshold Levels, VGS(th) < 1.5 V
- Low Gate Charge (3.8 nC)
- Leading Edge Trench Technology of Low R_{DS(on)}
- High Power and Current Handling Capability
- This is a Pb-Free Device

Applications

- DC-DC Converters (Buck and Boost Circuits)
- · Low Side Load Switch
- Optimized for Battery and Load Management Applications in Portable Equipment Like Cell Phones, DSCs, Media Player, Etc
- Battery Charging and Protection Circuits

MAXIMUM RATINGS (T_J = 25 °C unless otherwise noted)

Paran	Symbol	Value	Unit		
Drain-to-Source Voltage			V _{DSS}	20	V
Gate-to-Source Voltage)		V _{GS}	±12	V
Continuous Drain	Steady State	T _A = 25 °C	I _D	3.0	Α
Current (Note 1)	Siale	T _A = 85 °C		2.2	
Continuous Drain Current (Note 1)	t ≤ 5 s T _A = 25 °C		I _D	3.5	Α
Power Dissipation (Note 1)	Steady State	T _A = 25 °C	P_{D}	0.9	W
t≤5s			1.1		
Pulsed Drain Current		t _p = 10 μs	I _{DM}	10	Α
Operating Junction and Storage Temperature			T _J , T _{STG}	–50 to 150	ô
Source Current (Body Diode)			Is	0.8	Α
Lead Temperature for Soldering Purposes (1/8" from case for 10 s)			TL	260	°C

THERMAL RESISTANCE RATINGS

Parameter	Symbol	Value	Unit
Junction-to-Ambient - Steady State (Note 1)	$R_{\theta JA}$	140	°C/W
Junction-to-Ambient – t ≤ 5 s (Note 1)	R _{0,IA}	110	°C/W


Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

 Surface Mounted on FR4 Board using 1 in sq pad size (Cu area = 1.127 in sq [1 oz] including traces).


1

N-CHANNEL MOSFET

V _{(BR)DSS}	R _{DS(on)} Max	I _D Max
20 V	70 mΩ @ 4.5 V	3.5 A
20 V	100 mΩ @ 2.5 V	0.5 A



N-CHANNEL MOSFET




DN = Specific Device Code

M = Date Code

= Pb-Free Package

(Note: Microdot may be in either location)



ORDERING INFORMATION

See detailed ordering and shipping information on page 2 of this data sheet.

NTGD3148N

MOSFET ELECTRICAL CHARACTERISTICS ($T_J = 25$ °C unless otherwise noted)

Characteristic	Symbol	Test Cor	ndition	Min	Тур	Max	Unit
OFF CHARACTERISTICS					•		•
Drain-to-Source Breakdown Voltage	V _{(BR)DSS}	V _{GS} = 0 V, I _E	₎ = 250 μA	20			V
Drain-to-Source Breakdown Voltage Temperature Coefficient	V _{(BR)DSS} /	I _D = 250 μA, Ref to 25 °C			12.5		mV/°C
Zero Gate Voltage Drain Current	I _{DSS}	V _{GS} = 0 V,	T _J = 25 °C			1.0	
		$V_{DS} = 16 \text{ V}$	T _J = 125 °C			10	μΑ
Gate-to-Source Leakage Current	I _{GSS}	V _{DS} = 0 V, V ₀	_{GS} = ±12 V			100	nA
ON CHARACTERISTICS (Note 2)	<u>'</u>			I			1
Gate Threshold Voltage	V _{GS(TH)}	V _{GS} = V _{DS} , I	_D = 250 μA	0.5		1.5	V
Gate Threshold Temperature Coefficient	V _{GS(TH)} /T _J				3.28		mV/°C
Drain-to-Source On Resistance	R _{DS(on)}	V _{GS} = 4.5 V	I _D = 3.5 A		41.7	70	
		V _{GS} = 2.5 V	I _D = 2.8 A		58	100	mΩ
Forward Transconductance	9FS	V _{DS} = 5.0 V,	I _D = 3.5 A		6.2		S
CHARGES, CAPACITANCES AND GATE I	RESISTANCE			I			
Input Capacitance	C _{ISS}	$V_{GS} = 0 \text{ V, f} = 1.0 \text{ MHz,}$ $V_{DS} = 10 \text{ V}$			300		pF
Output Capacitance	C _{OSS}				73		
Reverse Transfer Capacitance	C _{RSS}	VDS =	10 V		44		1
Total Gate Charge	Q _{G(TOT)}				3.8		1
Threshold Gate Charge	Q _{G(TH)}	V _{GS} = 4.5 V, \	/po = 10 V		0.3		nC
Gate-to-Source Charge	Q _{GS}	$I_D = 3$.5 A		0.7		
Gate-to-Drain Charge	Q_{GD}				1.1		7
Gate Resistance	RG				2.8		Ω
SWITCHING CHARACTERISTICS (Note 3)				l			1
Turn-On Delay Time	t _{d(ON)}				7.4		
Rise Time	t _r	Voc = 45 V V	/ _{DO} = 10 V		11.2		ns
Turn-Off Delay Time	t _{d(OFF)}	V _{GS} = 4.5 V, \ I _D = 3.5 A, F	$R_{\rm G} = 3.0 \Omega$		12.8		
Fall Time	t _f				1.6		1
DRAIN-TO-SOURCE CHARACTERISTICS							
Forward Diode Voltage	V_{SD}	V _{GS} = 0 V	T _J = 25 °C		0.71		
		$I_{D} = 0.8 \text{ A}$	T _J = 125 °C		0.57		V
Reverse Recovery Time	t _{RR}				9.0		
Charge Time	Ta	$V_{GS} = 0 \text{ V, } d_{1S}/d_{t} = 100 \text{ A/}\mu\text{s,}$ $I_{S} = 0.8 \text{ A}$			5.0		ns
Discharge Time	T _b				4.0		
Reverse Recovery Time	Q _{RR}				2.5		nC

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions. 2. Pulse Test: pulse width \leq 300 μ s, duty cycle \leq 2%.

ORDERING INFORMATION

Device	Package	Shipping [†]
NTGD3148NT1G	TSOP-6 (Pb-Free)	3000 / Tape & Reel

[†]For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

^{3.} Switching characteristics are independent of operating junction temperatures.

NTGD3148N

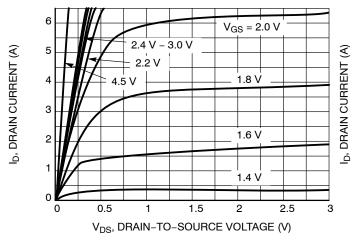


Figure 1. On-Region Characteristics




Figure 2. Transfer Characteristics




Figure 3. On-Resistance vs. Voltage




Figure 4. On-Resistance vs. Drain Current and Gate Voltage




Figure 5. On–Resistance Variation vs. Temperature




Figure 6. Drain-to-Source Leakage Current vs. Voltage

NTGD3148N


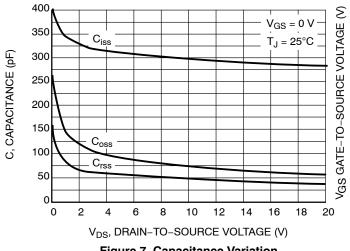


Figure 7. Capacitance Variation



Q_G, TOTAL GATE CHARGE (nC)

Figure 8. Gate-To-Source and Drain-To-Source Voltage vs. Total Charge




Figure 9. Resistive Switching Time Variation vs. Gate Resistance




Figure 10. Diode Forward Voltage vs. Current





NOTE 5


TSOP-6 3.00x1.50x0.90, 0.95P **CASE 318G ISSUE W**

DATE 26 FEB 2024





- DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 2018.
- CONTROLLING DIMENSION: MILLIMETERS.
 MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH. MINIMUM
 LEAD THICKNESS IS THE MINIMUM THICKNESS OF BASE MATERIAL.
- 4. DIMENSIONS D AND E1 DO NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR GATE BURRS. MOLD FLASH, PROTRUSIONS, OR GATE BURRS SHALL NOT EXCEED 0.15 PER SIDE. DIMENSIONS D AND E1 ARE DETERMINED AT DATUM H.

 5. PIN 1 INDICATOR MUST BE LOCATED IN THE INDICATED ZONE

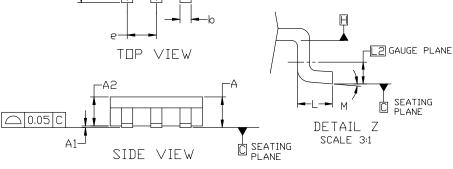

N	1ILLIM	IETERS	2	
DIM	MIN	NDM	MAX	
Α	0.90	1.00	1.10	
A1	0.01	0.06	0.10	
A2	0.80	0.90	1.00	
b	0.25	0.38	0.50	
C	0.10	0.18	0.26	
D	2.90	3.00	3,10	
E	2.50	2.75	3.00	
E1	1.30	1.50	1.70	
е	0.85	0.95	1.05	
L	0.20	0.40	0.60	
L2	0.25 BSC			
М	0°		10°	





RECOMMENDED MOUNTING FOOTPRINT

*For additional information on our Pb-Free strategy and soldering details, please download the DN Semiconductor Soldering and Mounting Techniques Reference manual, SDLDERRM/D.

DOCUMENT NUMBER:	98ASB14888C Electronic versions are uncontrolled except when accessed directly from the Dot Printed versions are uncontrolled except when stamped "CONTROLLED COPY"		
DESCRIPTION:	TSOP-6 3.00x1.50x0.90, 0.95P		PAGE 1 OF 2

onsemi and ONSEMI. are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. **onsemi** makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

TSOP-6 3.00x1.50x0.90, 0.95P CASE 318G

ISSUE W

DATE 26 FEB 2024

GENERIC MARKING DIAGRAM*



XXX M= **STANDARD**

XXX = Specific Device Code

XXX = Specific Device Code

=Assembly Location

= Date Code

= Year

= Pb-Free Package

W = Work Week

= Pb-Free Package

*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "•", may or may not be present. Some products may not follow the Generic Marking.

STYLE 1: PIN 1. DRAIN 2. DRAIN 3. GATE 4. SOURCE 5. DRAIN 6. DRAIN	STYLE 2: PIN 1. EMITTER 2 2. BASE 1 3. COLLECTOR 1 4. EMITTER 1 5. BASE 2 6. COLLECTOR 2	STYLE 3: PIN 1. ENABLE 2. N/C 3. R BOOST 4. Vz 5. V in 6. V out	STYLE 4: PIN 1. N/C 2. V in 3. NOT USED 4. GROUND 5. ENABLE 6. LOAD	STYLE 5: PIN 1. EMITTER 2 2. BASE 2 3. COLLECTOR 1 4. EMITTER 1 5. BASE 1 6. COLLECTOR 2	STYLE 6: PIN 1. COLLECTOR 2. COLLECTOR 3. BASE 4. EMITTER 5. COLLECTOR 6. COLLECTOR
STYLE 7: PIN 1. COLLECTOR 2. COLLECTOR 3. BASE 4. N/C 5. COLLECTOR 6. EMITTER	STYLE 8: PIN 1. Vbus 2. D(in) 3. D(in)+ 4. D(out)+ 5. D(out) 6. GND	STYLE 9: PIN 1. LOW VOLTAGE GATE 2. DRAIN 3. SOURCE 4. DRAIN 5. DRAIN 6. HIGH VOLTAGE GATE	2. GND ' 3. D(OUT)- 4. D(IN)- 5. VBUS	STYLE 11: PIN 1. SOURCE 1 2. DRAIN 2 3. DRAIN 2 4. SOURCE 2 5. GATE 1 6. DRAIN 1/GATE 2	STYLE 12: PIN 1. I/O 2. GROUND 3. I/O 4. I/O 5. VCC 6. I/O
STYLE 13: PIN 1. GATE 1 2. SOURCE 2 3. GATE 2 4. DRAIN 2 5. SOURCE 1 6. DRAIN 1	STYLE 14: PIN 1. ANODE 2. SOURCE 3. GATE 4. CATHODE/DRAIN 5. CATHODE/DRAIN 6. CATHODE/DRAIN		/LE 16: N 1. ANODE/CATHODE 2. BASE 3. EMITTER 4. COLLECTOR 5. ANODE 6. CATHODE	STYLE 17: PIN 1. EMITTER 2. BASE 3. ANODE/CATHODE 4. ANODE 5. CATHODE 6. COLLECTOR	

DOCUMENT NUMBER:	98ASB14888C Electronic versions are uncontrolled except when accessed directly from the Documer Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red		
DESCRIPTION:	TSOP-6 3.00x1.50x0.90, 0.95P		PAGE 2 OF 2

onsemi and ONSEMi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

onsemi, Onsemi, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. Onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA class 3 medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:

 $\textbf{Technical Library:} \ \underline{www.onsemi.com/design/resources/technical-documentation}$

onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at

www.onsemi.com/support/sales