

# MOSFET – Power, Single N-Channel, μ8FL 30 V, 9.4 mΩ, 40 A NVTFS4C13N

#### **Features**

- Low R<sub>DS(on)</sub> to Minimize Conduction Losses
- Low Capacitance to Minimize Driver Losses
- Optimized Gate Charge to Minimize Switching Losses
- NVTFS4C13NWF Wettable Flanks Product
- NVT Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable
- These Devices are Pb–Free, Halogen Free/BFR Free and are RoHS Compliant

### MAXIMUM RATINGS (T<sub>.I</sub> = 25°C unless otherwise stated)

Paran	Symbol	Value	Unit		
Drain-to-Source Voltage	Drain-to-Source Voltage				V
Gate-to-Source Voltage			$V_{GS}$	±20	V
Continuous Drain		T <sub>A</sub> = 25°C	I <sub>D</sub>	14	Α
Current R <sub>θJA</sub> (Notes 1, 2, 4)		T <sub>A</sub> = 100°C		10	
Power Dissipation R <sub>θJA</sub>		T <sub>A</sub> = 25°C	$P_{D}$	3.0	W
(Note 1, 2, 4)	Steady	T <sub>A</sub> = 100°C		1.5	
Continuous Drain Current R <sub>0JC</sub> (Note 1,	State	T <sub>C</sub> = 25°C	I <sub>D</sub>	40	
3, 4)		T <sub>C</sub> = 100°C		28	Α
Power Dissipation		T <sub>C</sub> = 25°C	$P_{D}$	26	W
R <sub>θJC</sub> (Note 1, 3, 4)		T <sub>C</sub> = 100°C		13	
Pulsed Drain Current	T <sub>A</sub> = 25°0	C, t <sub>p</sub> = 10 μs	$I_{DM}$	152	Α
Operating Junction and S	T <sub>J</sub> , T <sub>stg</sub>	–55 to +175	°C		
Source Current (Body Did	I <sub>S</sub>	24	Α		
Single Pulse Drain-to-Source Avalanche Energy ( $T_J = 25^{\circ}C$ , $I_L = 14 A_{pk}$ , $L = 0.1 mH$ )			E <sub>AS</sub>	10	mJ
Lead Temperature for Soldering Purposes (1/8" from case for 10 s)			TL	260	°C


Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

#### THERMAL RESISTANCE MAXIMUM RATINGS

Parameter	Symbol	Value	Unit
Junction-to-Case - Steady State (Drain) (Notes 1 and 4)	$R_{\theta JC}$	5.8	°C/W
Junction-to-Ambient - Steady State (Notes 1 and 2)	$R_{\theta JA}$	50	0/11

- The entire application environment impacts the thermal resistance values shown, they are not constants and are only valid for the particular conditions noted.
- 2. Surface-mounted on FR4 board using a 650 mm<sup>2</sup> 2 oz. Cu pad.
- Assumes heat-sink sufficiently large to maintain constant case temperature independent of device power.
- 4. Continuous DC current rating. Maximum current for pulses as long as 1 second is higher but is dependent on pulse duration and duty cycle.

V <sub>(BR)DSS</sub>	R <sub>DS(ON)</sub> MAX	I <sub>D</sub> MAX		
30 V	9.4 mΩ @ 10 V	40 A		
	14 mΩ @ 4.5 V	40 A		



# WDFN8 (μ8FL) CASE 511AB



4C13 = Specific Device Code for

NVMTS4C13N

13WF = Specific Device Code of

NVTFS4C13NWF

A = Assembly Location

Y = Year WW = Work Week

■ = Pb-Free Package

(Note: Microdot may be in either location)

#### **ORDERING INFORMATION**

See detailed ordering and shipping information on page 5 of this data sheet.

1

## **ELECTRICAL CHARACTERISTICS** ( $T_J = 25^{\circ}C$ unless otherwise specified)

Parameter	Symbol	Test Condition		Min	Тур	Max	Unit	
OFF CHARACTERISTICS								
Drain-to-Source Breakdown Voltage	V <sub>(BR)DSS</sub>	$V_{GS} = 0 \text{ V}, I_D = 250 \mu\text{A}$		30			V	
Drain-to-Source Breakdown Voltage Temperature Coefficient	V <sub>(BR)DSS</sub> /				14.9		mV/°C	
Zero Gate Voltage Drain Current	I <sub>DSS</sub>	V <sub>GS</sub> = 0 V,	T <sub>J</sub> = 25°C			1.0	<b>—</b> .	
		V <sub>DS</sub> = 24 V	T <sub>J</sub> = 125°C			10	μΑ	
Gate-to-Source Leakage Current	I <sub>GSS</sub>	$V_{DS} = 0 \text{ V}, V_{GS}$	<sub>S</sub> = ±20 V			±100	nA	
ON CHARACTERISTICS (Note 5)								
Gate Threshold Voltage	V <sub>GS(TH)</sub>	$V_{GS} = V_{DS}, I_{D}$	= 250 μΑ	1.3		2.1	V	
Negative Threshold Temperature Coefficient	V <sub>GS(TH)</sub> /T <sub>J</sub>				4.8		mV/°C	
Drain-to-Source On Resistance	R <sub>DS(on)</sub>	V <sub>GS</sub> = 10 V	I <sub>D</sub> = 30 A		7.5	9.4	0	
		V <sub>GS</sub> = 4.5 V	I <sub>D</sub> = 12 A		11.2	14	mΩ	
Forward Transconductance	9FS	V <sub>DS</sub> = 1.5 V, I	<sub>D</sub> = 15 A		40		S	
Gate Resistance	$R_{G}$	$T_A = 25^\circ$	°C		1.0		Ω	
CHARGES AND CAPACITANCES								
Input Capacitance	C <sub>ISS</sub>				770			
Output Capacitance	Coss	V <sub>GS</sub> = 0 V, f = 1 MH	Iz, V <sub>DS</sub> = 15 V		443		pF	
Reverse Transfer Capacitance	C <sub>RSS</sub>				127		1	
Capacitance Ratio	C <sub>RSS</sub> /C <sub>ISS</sub>	V <sub>GS</sub> = 0 V, V <sub>DS</sub> = 15 V, f = 1 MHz			0.165			
Total Gate Charge	Q <sub>G(TOT)</sub>				7.8			
Threshold Gate Charge	Q <sub>G(TH)</sub>				1.4		nC	
Gate-to-Source Charge	$Q_{GS}$	$V_{GS} = 4.5 \text{ V}, V_{DS} =$	15 V; I <sub>D</sub> = 30 A		2.9			
Gate-to-Drain Charge	$Q_{GD}$				3.7			
Gate Plateau Voltage	$V_{GP}$				3.6		V	
Total Gate Charge	Q <sub>G(TOT)</sub>	V <sub>GS</sub> = 10 V, V <sub>DS</sub> =	15 V; I <sub>D</sub> = 30 A		15.2		nC	
SWITCHING CHARACTERISTICS (Note 6)	, ,						•	
Turn-On Delay Time	t <sub>d(ON)</sub>				9			
Rise Time	t <sub>r</sub>	Vos = 4.5 V. Vr	ne = 15 V.		35		ns	
Turn-Off Delay Time	t <sub>d(OFF)</sub>	$V_{GS} = 4.5 \text{ V}, V_{D}$ $I_{D} = 15 \text{ A}, R_{G}$	$= 3.0 \Omega$		13			
Fall Time	t <sub>f</sub>				5			
Turn-On Delay Time	t <sub>d(ON)</sub>				6.0			
Rise Time	t <sub>r</sub>	Vos = 10 V Vr	ne = 15 V		26		1	
Turn-Off Delay Time	t <sub>d(OFF)</sub>	$V_{GS}$ = 10 V, $V_{DS}$ = 15 V, $I_{D}$ = 15 A, $R_{G}$ = 3.0 $\Omega$			16		ns	
Fall Time	t <sub>f</sub>			3.0				
DRAIN-SOURCE DIODE CHARACTERISTIC							•	
Forward Diode Voltage	$V_{SD}$	V <sub>GS</sub> = 0 V,	T <sub>J</sub> = 25°C		0.82	1.1	V	
		$I_S = 30 \text{ A}$	T <sub>J</sub> = 125°C		0.69			
Reverse Recovery Time	t <sub>RR</sub>	V <sub>GS</sub> = 0 V, dIS/dt = 100 A/μs, I <sub>S</sub> = 30 A			23.4		ns	
Charge Time	t <sub>a</sub>				12.1			
Discharge Time	t <sub>b</sub>				11.3			
Reverse Recovery Charge	Q <sub>RR</sub>			<b>-</b>	9.7		nC	

- 5. Pulse Test: pulse width  $\leq 300~\mu s$ , duty cycle  $\leq 2\%$ .
  6. Switching characteristics are independent of operating junction temperatures.

#### **TYPICAL CHARACTERISTICS**

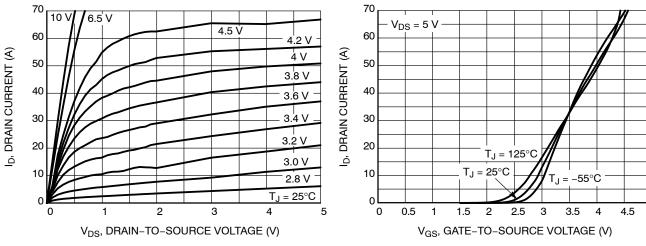


Figure 1. On-Region Characteristics

Figure 2. Transfer Characteristics

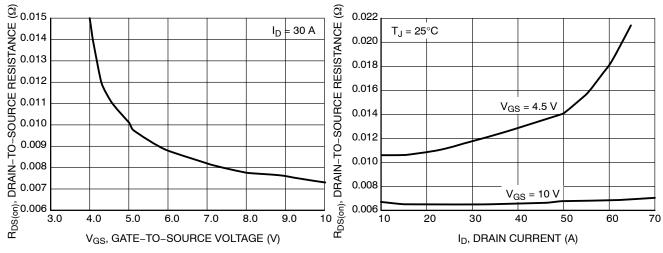


Figure 3. On-Resistance vs. V<sub>GS</sub>

Figure 4. On-Resistance vs. Drain Current and Gate Voltage

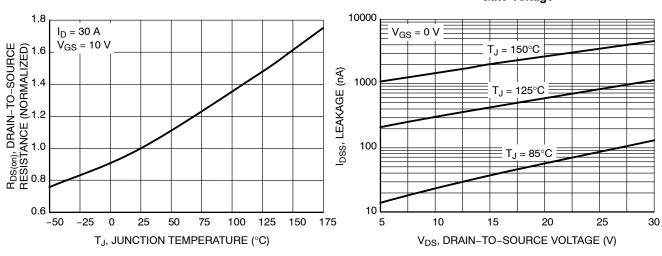


Figure 5. On–Resistance Variation with Temperature

Figure 6. Drain-to-Source Leakage Current vs. Voltage

#### **TYPICAL CHARACTERISTICS**

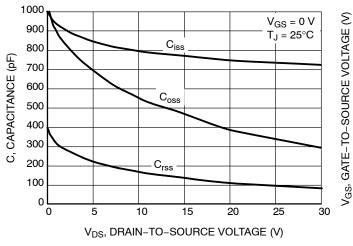


Figure 7. Capacitance Variation




Figure 8. Gate-to-Source and Drain-to-Source Voltage vs. Total Charge




Figure 9. Resistive Switching Time Variation vs. Gate Resistance




Figure 10. Diode Forward Voltage vs. Current

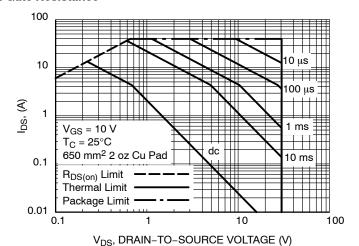


Figure 11. Maximum Rated Forward Biased Safe Operating Area

#### **TYPICAL CHARACTERISTICS**


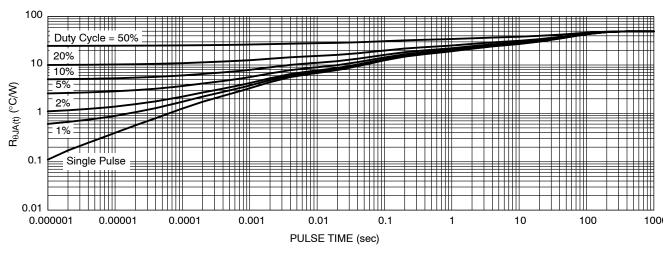


Figure 12. Thermal Response

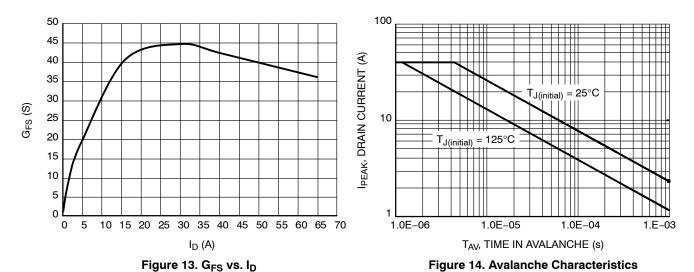

#### **ORDERING INFORMATION**

Device	Marking	Package	Shipping <sup>†</sup>
NVTFS4C13NTAG	4C13	WDFN8 (Pb-Free)	1500 / Tape & Reel
NVTFS4C13NWFTAG	13WF	WDFN8 (Pb-Free)	1500 / Tape & Reel
NVTFS4C13NTWG	4C13	WDFN8 (Pb-Free)	5000 / Tape & Reel
NVTFS4C13NWFTWG	13WF	WDFN8 (Pb-Free)	5000 / Tape & Reel
NVTFS4C13NWFETWG	13WF	WDFN8 (Pb-Free)	5000 / Tape & Reel
NVTFS4C13NETAG	4C13	WDFN8 (Pb-Free)	1500 / Tape & Reel

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.








SCALE 2:1

#### WDFN8 3.3x3.3, 0.65P CASE 511AB ISSUE D

**DATE 23 APR 2012** 

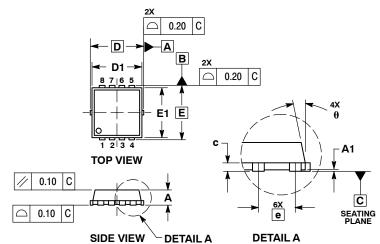

#### NOTES:

- DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
  CONTROLLING DIMENSION: MILLIMETERS.
  DIMENSION D1 AND E1 DO NOT INCLUDE MOLD FLASH
  PROTRUSIONS OR GATE BURRS.

	MILLIMETERS			INCHES				
DIM	MIN	NOM	MAX	MIN	NOM	MAX		
Α	0.70	0.75	0.80	0.028	0.030	0.031		
A1	0.00		0.05	0.000		0.002		
b	0.23	0.30	0.40	0.009	0.012	0.016		
С	0.15	0.20	0.25	0.006	0.008	0.010		
D		3.30 BSC		0	.130 BSC			
D1	2.95	3.05	3.15	0.116	0.120	0.124		
D2	1.98	2.11	2.24	0.078	0.083	0.088		
E		3.30 BSC			0.130 BSC			
E1	2.95	3.05	3.15	0.116	0.120	0.124		
E2	1.47	1.60	1.73	0.058	0.063	0.068		
E3	0.23	0.30	0.40	0.009	0.012	0.016		
е		0.65 BSC	;	0.026 BSC				
G	0.30	0.41	0.51	0.012	0.016	0.020		
K	0.65	0.80	0.95	0.026	0.032	0.037		
L	0.30	0.43	0.56	0.012	0.017	0.022		
L1	0.06	0.13	0.20	0.002	0.005	0.008		
М	1.40	1.50	1.60	0.055	0.059	0.063		
θ	0 °		12 °	0 °		12 °		




### **GENERIC MARKING DIAGRAM\***



XXXXX = Specific Device Code Α = Assembly Location

= Year = Work Week WW = Pb-Free Package



DIMENSION: MILLIMETERS

\*For additional information on our Pb-Free strategy and soldering details, please download the onsemi Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

DOCUMENT NUMBER:	98AON30561E	Electronic versions are uncontrolled except when accessed directly from the Document Reposit Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.		
DESCRIPTION:	WDFN8 3.3X3.3, 0.65P		PAGE 1 OF 1	

onsemi and ONSEMI. are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. **onsemi** makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

<sup>\*</sup>This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "■", may or may not be present. Some products may not follow the Generic Marking.

onsemi, Onsemi, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at <a href="www.onsemi.com/site/pdf/Patent-Marking.pdf">www.onsemi.com/site/pdf/Patent-Marking.pdf</a>. Onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA class 3 medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase

#### ADDITIONAL INFORMATION

**TECHNICAL PUBLICATIONS:** 

 $\textbf{Technical Library:} \ \underline{www.onsemi.com/design/resources/technical-documentation}$ 

onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at

www.onsemi.com/support/sales