onsemi

Dual Series Schottky Barrier Diodes

BAT54SW

These Schottky barrier diodes are designed for high speed switching applications, circuit protection, and voltage clamping. Extremely low forward voltage reduces conduction loss. Miniature surface mount package is excellent for hand held and portable applications where space is limited.

Features

- Extremely Fast Switching Speed
- Low Forward Voltage 0.35 Volts (Typ) @ I_F = 10 mAdc
- NSV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable
- These Devices are Pb–Free, Halogen Free/BFR Free and are RoHS Compliant


MAXIMUM RATINGS (T_J = 125° C unless otherwise noted)


Rating	Symbol	Value	Unit
Reverse Voltage	V _R	30	V
Total Power Dissipation @ T _A = 25°C Derate above 25°C	P _D	200 2.0	mW mW/°C
Forward Current (DC)	١ _F	200	mA
Non-Repetitive Peak Forward Current $t_p < 10$ msec	I _{FSM}	600	mA
Repetitive Peak Forward Current Pulse Wave = 1 sec, Duty Cycle = 66%	I _{FRM}	300	mA
Junction Temperature	TJ	-55 to 125	°C
Storage Temperature Range	T _{stg}	-55 to +150	°C
Electrostatic Discharge	ESD	HM < 8000 MM < 400	V V


Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

30 VOLT DUAL SERIES SCHOTTKY BARRIER DIODES









(Note: Microdot may be in either location)

*Date Code orientation may vary depending upon manufacturing location.

ORDERING INFORMATION


Device	Package	Shipping [†]
BAT54SWT1G	SOT–323 (Pb–Free)	3,000 / Tape & Reel
NSVBAT54SWT1G	SOT-323 (Pb-Free)	3,000 / Tape & Reel

+ For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

BAT54SW

Characteristic	Symbol	Min	Тур	Max	Unit
Reverse Breakdown Voltage $(I_R = 10 \ \mu A)$	V _{(BR)R}	30	_	-	V
Reverse Leakage (V _R = 25 V)	l _R	-	0.2	2.0	μA
Forward Voltage $(I_F = 0.1 \text{ mA})$ $(I_F = 1.0 \text{ mA})$ $(I_F = 10 \text{ mA})$ $(I_F = 30 \text{ mA})$ $(I_F = 100 \text{ mA})$	V _F	- - - -	0.22 0.29 0.35 0.41 0.52	0.24 0.32 0.40 0.5 0.8	V
Total Capacitance (V _R = 1.0 V, f = 1.0 MHz)	C _T	-	7.6	10	pF
Reverse Recovery Time $(I_F = I_R = 10 \text{ mAdc}, I_{R(REC)} = 1.0 \text{ mAdc}, Figure 1)$	t _{rr}	-	_	5.0	ns

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

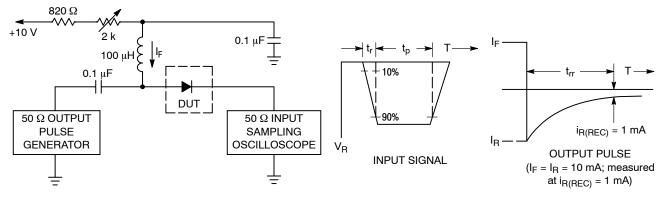




Figure 1. Recovery Time Equivalent Test Circuit

BAT54SW

TYPICAL CHARACTERISTICS

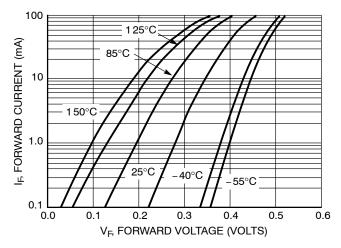
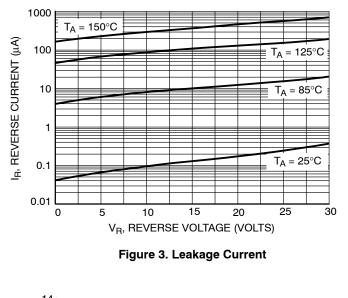


Figure 2. Forward Voltage




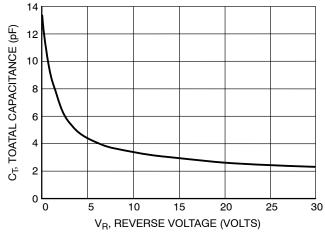


Figure 4. Total Capacitance

onsemi

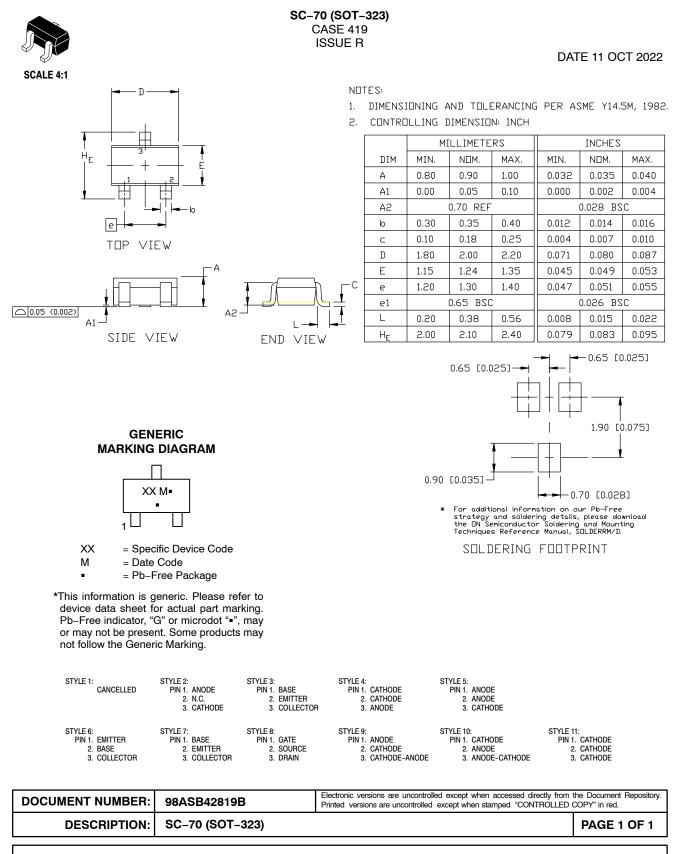

onsemi and ONSEMi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights of others.

onsemi, ONSEMI, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at <u>www.onsemi.com/site/pdf/Patent-Marking.pdf</u>. onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or indental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification. Buyer shall indemnify and hold onsemi and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs,

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:

Technical Library: www.onsemi.com/design/resources/technical-documentation onsemi Website: www.onsemi.com

ONLINE SUPPORT: <u>www.onsemi.com/support</u> For additional information, please contact your local Sales Representative at <u>www.onsemi.com/support/sales</u>