

Digital Transistors (BRT) R1 = 2.2 k Ω , R2 = ∞ k Ω

PNP Transistors with Monolithic Bias Resistor Network

MUN2138, MMUN2138L, MUN5138, DTA123TE, DTA123TM3, NSBA123TF3

This series of digital transistors is designed to replace a single device and its external resistor bias network. The Bias Resistor Transistor (BRT) contains a single transistor with a monolithic bias network consisting of two resistors; a series base resistor and a base–emitter resistor. The BRT eliminates these individual components by integrating them into a single device. The use of a BRT can reduce both system cost and board space.

Features

- Simplifies Circuit Design
- Reduces Board Space
- Reduces Component Count
- S and NSV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable
- These Devices are Pb–Free, Halogen Free/BFR Free and are RoHS Compliant


MAXIMUM RATINGS (T_A = 25°C)

| Rating | Symbol | Max | Unit |
|--------------------------------|----------------------|-----|------|
| Collector-Base Voltage | V _{CBO} | 50 | Vdc |
| Collector-Emitter Voltage | V_{CEO} | 50 | Vdc |
| Collector Current - Continuous | Ic | 100 | mAdc |
| Input Forward Voltage | $V_{IN(fwd)}$ | 12 | Vdc |
| Input Reverse Voltage | V _{IN(rev)} | 5 | Vdc |


Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1

PIN CONNECTIONS



MARKING DIAGRAMS

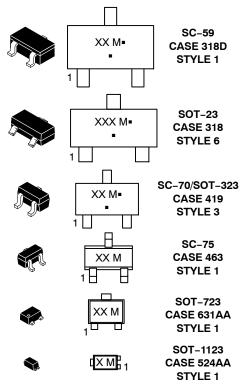

XXX = Specific Device Code

M = Date Code*

= Pb-Free Package

(Note: Microdot may be in either location)

*Date Code orientation may vary depending upon manufacturing location.

ORDERING INFORMATION

See detailed ordering, marking, and shipping information on page 2 of this data sheet.

NOTE: Some of the devices on this data sheet have been **DISCONTINUED**. Please refer to the table on page 2.

Table 1. ORDERING INFORMATION

| Device | Part Marking | Package | Shipping [†] |
|--------------------------------|--------------|----------------------------|-----------------------|
| MMUN2138LT1G, NSVMMUN2138LT1G* | ACC | SOT-23 (Pb-Free) | 3000 / Tape & Reel |
| MUN5138T1G | 6Q | SC-70/SOT-323 (Pb-Free) | 3000 / Tape & Reel |
| DTA123TET1G | 6J | SC-75 (Pb-Free) | 3000 / Tape & Reel |
| NSBA123TF3T5G | F (90°)** | SOT-1123 (Pb-Free) | 8000 / Tape & Reel |

DISCONTINUED (Note 1)

| MUN2138T1G | 6V | SC-59 (Pb-Free) | 3000 / Tape & Reel |
|--------------|----|----------------------|--------------------|
| DTA123TM3T5G | 7F | SOT-723 (Pb-Free) | 8000 / Tape & Reel |

[†]For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

^{1.} **DISCONTINUED:** These devices are not recommended for new design. Please contact your **onsemi** representative for information. The most current information on these devices may be available on www.onsemi.com.

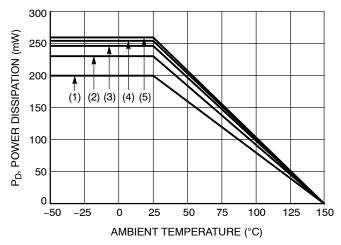


Figure 1. Derating Curve

- (1) SC-75 and SC-70/SOT323; Minimum Pad
- (2) SC-59; Minimum Pad
- (3) SOT-23; Minimum Pad
- (4) SOT-1123; 100 mm², 1 oz. copper trace
- (5) SOT-723; Minimum Pad

^{*} $(\dot{x}\dot{x}^{\circ})$ = Degree rotation in the clockwise direction.

Table 2. THERMAL CHARACTERISTICS

| | Characteristic | Symbol | Max | Unit |
|--|--|-----------------------------------|--------------------------|-------------|
| THERMAL CHARACTERI | STICS (SC-59) (MUN2138) | | | |
| Total Device Dissipation $T_A = 25^{\circ}C$ Derate above 25°C | (Note 2) (Note 3) (Note 2) (Note 3) | P _D | 230 338 1.8 2.7 | mW mW/°C |
| Thermal Resistance, Junction to Ambient | (Note 2) (Note 3) | R_{\thetaJA} | 540 370 | °C/W |
| Thermal Resistance, Junction to Lead | (Note 2) (Note 3) | $R_{	hetaJL}$ | 264 287 | °C/W |
| Junction and Storage Tem | perature Range | T _J , T _{stg} | -55 to +150 | °C |
| THERMAL CHARACTERI | ISTICS (SOT-23) (MMUN2138L) | | | |
| Total Device Dissipation T _A = 25°C Derate above 25°C | (Note 2) (Note 3) (Note 2) (Note 3) | P _D | 246 400 2.0 3.2 | mW mW/°C |
| Thermal Resistance, Junction to Ambient | (Note 1) (Note 3) | $R_{	heta JA}$ | 508 311 | °C/W |
| Thermal Resistance, Junction to Lead | (Note 2) (Note 3) | $R_{	hetaJL}$ | 174 208 | °C/W |
| Junction and Storage Tem | perature Range | T _J , T _{stg} | -55 to +150 | °C |
| THERMAL CHARACTERI | STICS (SC-70/SOT-323) (MUN5138) | | | |
| Total Device Dissipation $T_A = 25$ °C Derate above 25°C | (Note 2) (Note 3) (Note 2) (Note 3) | P_{D} | 202 310 1.6 2.5 | mW mW/°C |
| Thermal Resistance, Junction to Ambient | (Note 2) (Note 3) | $R_{	heta JA}$ | 618 403 | °C/W |
| Thermal Resistance, Junction to Lead | (Note 2) (Note 3) | $R_{	hetaJL}$ | 280 332 | °C/W |
| Junction and Storage Tem | perature Range | T _J , T _{stg} | -55 to +150 | °C |
| THERMAL CHARACTERI | ISTICS (SC-75) (DTA123TE) | <u> </u> | | |
| Total Device Dissipation $T_A = 25^{\circ}C$ Derate above 25°C | (Note 2) (Note 3) (Note 2) (Note 3) | P _D | 200 300 1.6 2.4 | mW mW/°C |
| Thermal Resistance, Junction to Ambient | (Note 2) (Note 3) | $R_{	hetaJA}$ | 600 400 | °C/W |
| | perature Range | T _J , T _{stg} | -55 to +150 | °C |
| Junction and Storage Tem | | | | |
| | ISTICS (SOT-723) (DTA123TM3) | | | |
| | (Note 2) (Note 3) (Note 2) (Note 3) | P _D | 260 600 2.0 4.8 | mW mW/°C |

- 2. FR-4 @ Minimum Pad.
- 3. FR-4 @ 1.0 x 1.0 Inch Pad.
- FR-4 @ 100 mm², 1 oz. copper traces, still air.
 FR-4 @ 500 mm², 1 oz. copper traces, still air.

Table 2. THERMAL CHARACTERISTICS

| Characteristic | | | Symbol | Max | Unit |
|--|--|----------|-----------------------------------|--------------------------|-------------|
| THERMAL CHARACTERI | STICS (SOT-723) (DTA123TM3) | | | | |
| Junction and Storage Tem | perature Range | | T _J , T _{stg} | -55 to +150 | °C |
| THERMAL CHARACTERI | STICS (SOT-1123) (NSBA123TF3) | | | | |
| Total Device Dissipation $T_A = 25^{\circ}C$ Derate above 25°C | (Note 4) (Note 5) (Note 4) (Note 5) | | P _D | 254 297 2.0 2.4 | mW mW/°C |
| Thermal Resistance, Junction to Ambient | (Note 4) (Note 5) | | $R_{	hetaJA}$ | 493 421 | °C/W |
| Thermal Resistance, Junc | ion to Lead | (Note 4) | $R_{	heta JL}$ | 193 | °C/W |
| Junction and Storage Tem | perature Range | | T _J , T _{stg} | -55 to +150 | °C |

^{2.} FR-4 @ Minimum Pad.

Table 3. ELECTRICAL CHARACTERISTICS ($T_A = 25$ °C, unless otherwise noted)

| Characteristic | Symbol | Min | Тур | Max | Unit |
|---|--------------------------------|-----|-----|------|------|
| OFF CHARACTERISTICS | | - | • | | |
| Collector-Base Cutoff Current (V _{CB} = 50 V, I _E = 0) | I _{CBO} | _ | - | 100 | nAdc |
| Collector-Emitter Cutoff Current (V _{CE} = 50 V, I _B = 0) | I _{CEO} | _ | - | 500 | nAdc |
| Emitter-Base Cutoff Current (V _{EB} = 6.0 V, I _C = 0) | I _{EBO} | - | - | 4.0 | mAdc |
| Collector–Base Breakdown Voltage ($I_C = 10 \mu A, I_E = 0$) | V _(BR) CBO | 50 | - | - | Vdc |
| Collector-Emitter Breakdown Voltage (Note 6) (I _C = 2.0 mA, I _B = 0) | V _(BR) CEO | 50 | _ | - | Vdc |
| ON CHARACTERISTICS | | | | | |
| DC Current Gain (Note 6) (I _C = 5.0 mA, V _{CE} = 10 V) | h _{FE} | 160 | 350 | - | |
| Collector-Emitter Saturation Voltage (Note 6) (I _C = 10 mA, I _B = 0.3 mA) | V _{CE(sat)} | _ | _ | 0.25 | Vdc |
| Input Voltage (off) $(V_{CE} = 5.0 \text{ V}, I_C = 100 \mu\text{A})$ | V _{i(off)} | - | 0.6 | 0.5 | Vdc |
| Input Voltage (on) (V _{CE} = 0.3 V, I _C = 10 mA) | V _{i(on)} | 1.3 | 0.9 | - | Vdc |
| Output Voltage (on) (V _{CC} = 5.0 V, V _B = 2.5 V, R _L = 1.0 k Ω) | V _{OL} | - | - | 0.2 | Vdc |
| Output Voltage (off) ($V_{CC} = 5.0 \text{ V}$, $V_B = 0.5 \text{ V}$, $R_L = 1.0 \text{ k}\Omega$) | V _{OH} | 4.9 | _ | - | Vdc |
| Input Resistor | R1 | 1.5 | 2.2 | 2.9 | kΩ |
| Resistor Ratio | R ₁ /R ₂ | - | - | - | |

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

^{3.} FR-4 @ 1.0 x 1.0 Inch Pad.

^{4.} FR-4 @ 100 mm², 1 oz. copper traces, still air.
5. FR-4 @ 500 mm², 1 oz. copper traces, still air.

^{6.} Pulsed Condition: Pulse Width = 300 msec, Duty Cycle ≤ 2%.

TYPICAL CHARACTERISTICS, MUN2138, MMUN2138L, MUN5138, DTA123TE, DTA123TM3, NSBA123TF3

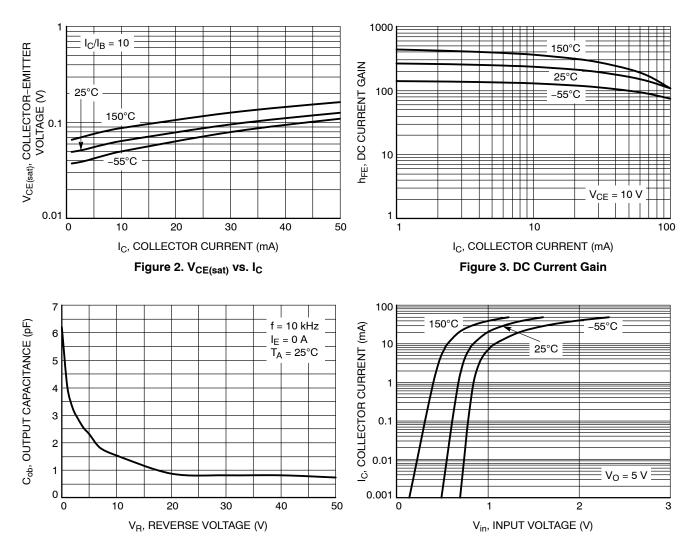


Figure 4. Output Capacitance

Figure 5. Output Current vs. Input Voltage

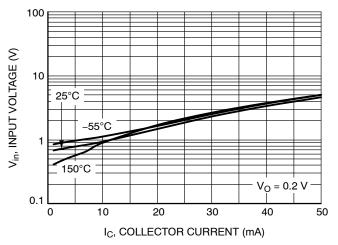


Figure 6. Input Voltage vs. Output Current

PACKAGE DIMENSIONS




SC-59-3 2.90x1.50x1.15, 1.90P CASE 318D **ISSUE J**


DATE 15 FEB 2024


NOTES:

- DIMENSIONING AND TOLERANCING CONFORM TO ASME Y14.5-2018.
- ALL DIMENSION ARE IN MILLIMETERS.

| | MILLIMETERS | | | |
|-----|-------------|------|------|--|
| DIM | MIN. | NOM. | MAX. | |
| Α | 1.00 | 1.15 | 1.30 | |
| A1 | 0.01 | 0.06 | 0.10 | |
| b | 0.35 | 0.43 | 0.50 | |
| С | 0.09 | 0.14 | 0.18 | |
| D | 2.70 | 2.90 | 3.10 | |
| Е | 2.50 | 2.80 | 3.00 | |
| E1 | 1.30 | 1.50 | 1.70 | |
| е | 1.90 BSC | | | |
| L | 0.20 | 0.40 | 0.60 | |






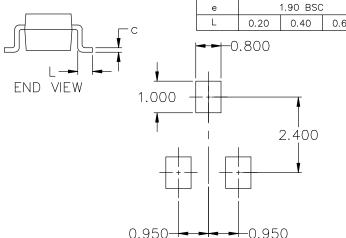

RECOMMENDED MOUNTING FOOTPRINT*

FOR ADDITIONAL INFORMATION ON OUR Pb-FREE STRATEGY AND SOLDERING DETAILS, PLEASE DOWNLOAD THE ON SEMICONDUCTOR SOLDERING AND MOUNTING TECHNIQUES REFERENCE MANUAL, SOLDERRM/D.



GENERIC MARKING DIAGRAM*



XXX = Specific Device Code

= Date Code M

= Pb-Free Package*

(Note: Microdot may be in either location)

*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "=", may or may not be present. Some products may not follow the Generic Marking.

STYLE 1: PIN 1. BASE STYLE 2: PIN 1. ANODE PIN 1. ANODE 2. EMITTER 2. N.C. 3. CATHODE 3. CATHODE 3. COLLECTOR


STYLE 4: PIN 1. CATHODE STYLE 5: STYLE 6: PIN 1. CATHODE PIN 1. ANODE 2. CATHODE 2. CATHODE 2. N.C. 3. ANODE 3. ANODE/CATHODE







SOT-23 (TO-236) 2.90x1.30x1.00 1.90P **CASE 318 ISSUE AU**


DATE 14 AUG 2024







END VIEW

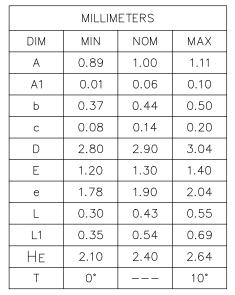

NOTES:

- DIMENSIONING AND TOLERANCING 1. PER ASME Y14.5M, 2018. CONTROLLING DIMENSIONS:
- MILLIMETERS.
- MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF THE
- BASE MATERIAL.
 DIMENSIONS D AND E DO NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR GATE BURRS.



SIDE VIEW




XXX = Specific Device Code

= Date Code

= Pb-Free Package

^{*}This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "=", may or may not be present. Some products may not follow the Generic Marking.



C

RECOMMENDED MOUNTING FOOTPRINT

* For additional information on our Pb-Free strategy and soldering details, please download the onsemi Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

STYLES ON PAGE 2

| DOCUMENT NUMBER: | 98ASB42226B Electronic versions are uncontrolled except when accessed directly from the Printed versions are uncontrolled except when stamped "CONTROLLED CO | | |
|------------------|--|--------------|-------------|
| DESCRIPTION: | SOT-23 (TO-236) 2.90x1.3 | 0x1.00 1.90P | PAGE 1 OF 2 |

SOT-23 (TO-236) 2.90x1.30x1.00 1.90P CASE 318 ISSUE AU

DATE 14 AUG 2024

| STYLE 1 THRU 5: CANCELLED | STYLE 6: PIN 1. BASE 2. EMITTER 3. COLLECTOR | STYLE 7: PIN 1. EMITTER 2. BASE 3. COLLECTOR | STYLE 8: PIN 1. ANODE 2. NO CONNECTION 3. CATHODE | 1 | |
|---|---|---|--|------------------|------------------|
| STYLE 9: | STYLE 10: | STYLE 11: | STYLE 12: PIN 1. CATHODE 2. CATHODE 3. ANODE | STYLE 13: | STYLE 14: |
| PIN 1. ANODE | PIN 1. DRAIN | PIN 1. ANODE | | PIN 1. SOURCE | PIN 1. CATHODE |
| 2. ANODE | 2. SOURCE | 2. CATHODE | | 2. DRAIN | 2. GATE |
| 3. CATHODE | 3. GATE | 3. CATHODE-ANODE | | 3. GATE | 3. ANODE |
| STYLE 15: | STYLE 16: | STYLE 17: | STYLE 18: | STYLE 19: | STYLE 20: |
| PIN 1. GATE | PIN 1. ANODE | PIN 1. NO CONNECTION | PIN 1. NO CONNECTION | N PIN 1. CATHODE | PIN 1. CATHODE |
| 2. CATHODE | 2. CATHODE | 2. ANODE | 2. CATHODE | 2. ANODE | 2. ANODE |
| 3. ANODE | 3. CATHODE | 3. CATHODE | 3. ANODE | 3. CATHODE-ANODE | 3. GATE |
| STYLE 21: | STYLE 22: | STYLE 23: | STYLE 24: | STYLE 25: | STYLE 26: |
| PIN 1. GATE | PIN 1. RETURN | PIN 1. ANODE | PIN 1. GATE | PIN 1. ANODE | PIN 1. CATHODE |
| 2. SOURCE | 2. OUTPUT | 2. ANODE | 2. DRAIN | 2. CATHODE | 2. ANODE |
| 3. DRAIN | 3. INPUT | 3. CATHODE | 3. SOURCE | 3. GATE | 3. NO CONNECTION |
| STYLE 27: PIN 1. CATHODE 2. CATHODE 3. CATHODE | STYLE 28: PIN 1. ANODE 2. ANODE 3. ANODE | | | | |

| DOCUMENT NUMBER: | 98ASB42226B Electronic versions are uncontrolled except when accessed directly from the Do Printed versions are uncontrolled except when stamped "CONTROLLED COPY" | | |
|------------------|--|--|-------------|
| DESCRIPTION: | SOT-23 (TO-236) 2.90x1.30x1.00 1.90P | | PAGE 2 OF 2 |






SC-59-3 2.90x1.50x1.15, 1.90P CASE 318D ISSUE J


DATE 15 FEB 2024


NOTES:

- DIMENSIONING AND TOLERANCING CONFORM TO ASME Y14.5-2018.
- 2. ALL DIMENSION ARE IN MILLIMETERS.

| | MILLIMETERS | | | |
|-----|-------------|------|------|--|
| DIM | MIN. | NOM. | MAX. | |
| Α | 1.00 | 1.15 | 1.30 | |
| A1 | 0.01 | 0.06 | 0.10 | |
| b | 0.35 | 0.43 | 0.50 | |
| С | 0.09 | 0.14 | 0.18 | |
| D | 2.70 | 2.90 | 3.10 | |
| E | 2.50 | 2.80 | 3.00 | |
| E1 | 1.30 | 1.50 | 1.70 | |
| е | 1.90 BSC | | | |
| L | 0.20 | 0.40 | 0.60 | |





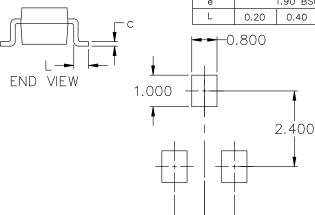

0.950

GENERIC MARKING DIAGRAM*



XXX = Specific Device Code

M = Date Code

= Pb-Free Package*

(*Note: Microdot may be in either location)

*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "•", may or may not be present. Some products may not follow the Generic Marking.

RECOMMENDED MOUNTING FOOTPRINT*

* FOR ADDITIONAL INFORMATION ON OUR Pb-FREE STRATEGY AND SOLDERING DETAILS, PLEASE DOWNLOAD THE ON SEMICONDUCTOR SOLDERING AND MOUNTING TECHNIQUES REFERENCE MANUAL, SOLDERRM/D.

| STYLE 1: | STYLE 2: | STYLE 3: |
|-----------------------------|---------------------------|---------------------------|
| PIN 1. BASE | PIN 1. ANODE | PIN 1. ANODE |
| 2. EMITTER | 2. N.C. | 2. ANODE |
| COLLECTOR | CATHODE | CATHODE |

| STYLE 4: | STYLE 5: | STYLE 6: |
|-------------------------|----------------|---------------------------------|
| PIN 1. CATHODE | PIN 1. CATHODE | PIN 1. ANODE |
| 2. N.C. | 2. CATHODE | 2. CATHODE |
| ANODE | 3. ANODE | ANODE/CATHODE |

| DOCUMENT NUMBER: | 98ASB42664B Electronic versions are uncontrolled except when accessed directly from the Document F Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. | | |
|------------------|--|--|-------------|
| DESCRIPTION: | SC-59-3 2.90x1.50x1.15, 1.90P | | PAGE 1 OF 1 |








SC-70 (SOT-323) CASE 419 ISSUE R


DATE 11 OCT 2022

NOTES:

- 1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1982.
- 2. CONTROLLING DIMENSION: INCH

| | MILLIMETERS | | | INCHES | | |
|-----|-------------|----------|------|------------------|----------|-------|
| DIM | MIN. | N□M. | MAX. | MIN. | N□M. | MAX. |
| Α | 0.80 | 0.90 | 1.00 | 0.032 | 0.035 | 0.040 |
| A1 | 0.00 | 0.05 | 0.10 | 0.000 | 0.002 | 0.004 |
| A2 | | 0.70 REF | | | 0.028 BS | C |
| b | 0.30 | 0.35 | 0.40 | 0.012 0.014 0.01 | | |
| С | 0.10 | 0.18 | 0.25 | 0.004 | 0.007 | 0.010 |
| D | 1.80 | 2.00 | 2.20 | 0.071 | 0.080 | 0.087 |
| E | 1.15 | 1.24 | 1.35 | 0.045 | 0.049 | 0.053 |
| е | 1.20 | 1.30 | 1.40 | 0.047 | 0.051 | 0.055 |
| e1 | 0.65 BSC | | | 0.026 BS | C | |
| L | 0.20 | 0.38 | 0.56 | 0.008 | 0.015 | 0.022 |
| HE | 2.00 | 2.10 | 2.40 | 0.079 | 0.083 | 0.095 |

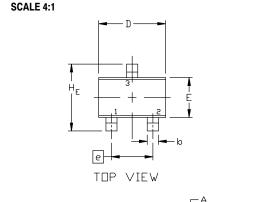



GENERIC MARKING DIAGRAM




XX = Specific Device Code

M = Date Code

■ = Pb-Free Package

*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "•", may or may not be present. Some products may not follow the Generic Marking.



For additional information on our Pb-Free strategy and soldering details, please download the ID Semiconductor Soldering and Mounting Techniques Reference Manual, SDLDERRM/D.

SOLDERING FOOTPRINT

| STYLE 1: CANCELLED | STYLE 2: PIN 1. ANODE 2. N.C. 3. CATHODE | STYLE 3: PIN 1. BASE 2. EMITTER 3. COLLECTOR | STYLE 4: PIN 1. CATHODE 2. CATHODE 3. ANODE | STYLE 5: PIN 1. ANODE 2. ANODE 3. CATHODE | |
|-----------------------------|---|---|--|--|---------------------------|
| STYLE 6: | STYLE 7: | STYLE 8: | STYLE 9: | STYLE 10: | STYLE 11: |
| PIN 1. EMITTER | PIN 1. BASE | PIN 1. GATE | PIN 1. ANODE | PIN 1. CATHODE | PIN 1. CATHODE |
| 2. BASE | 2. EMITTER | 2. SOURCE | 2. CATHODE | 2. ANODE | CATHODE |
| COLLECTOR | COLLECTOR | 3. DRAIN | CATHODE-ANODE | 3. ANODE-CATHODE | CATHODE |

| DOCUMENT NUMBER: | 98ASB42819B | Electronic versions are uncontrolled except when accessed directly from the Document Re Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. | |
|------------------|-----------------|--|-------------|
| DESCRIPTION: | SC-70 (SOT-323) | | PAGE 1 OF 1 |



SC75-3 1.60x0.80x0.80, 1.00P

CASE 463 ISSUE H

DATE 01 FEB 2024





- DIMENSIONING AND TOLERANCING CONFORM TO ASME Y14.5-2018.
- ALL DIMENSION ARE IN MILLIMETERS.


| DIM | М | ILLIMETER | RS | |
|------|-----------|-----------|------|--|
| INII | MIN. | NOM. | MAX. | |
| А | 0.70 | 0.80 | 0.90 | |
| A1 | 0.00 | 0.05 | 0.10 | |
| A2 | 0.80 REF. | | | |
| b | 0.15 | 0.20 | 0.30 | |
| С | 0.10 | 0.15 | 0.25 | |
| D | 1.55 | 1.60 | 1.65 | |
| Е | 1.50 | 1.60 | 1.70 | |
| E1 | 0.70 | 0.80 | 0.90 | |
| е | 1.00 BSC | | | |
| L | 0.10 | 0.15 | 0.20 | |

-0.356

0.787

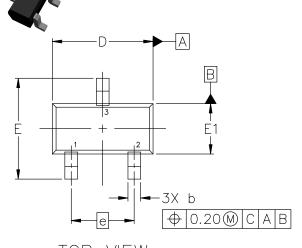





SIDE VIEW

GENERIC MARKING DIAGRAM*



XX = Specific Device Code

Μ = Date Code

= Pb-Free Package

*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "=", may or may not be present. Some products may not follow the Generic Marking.

| STYLE 1: | |
|-------------|--|
| PIN 1. BASE | |
| 2. EMITTER | |

3 COLLECTOR

STYLE 2: PIN 1. ANODE 2. N/C 3. CATHODE STYLE 3: PIN 1. ANODE 2. ANODE 3 CATHODE

1.803

0.508

FOR ADDITIONAL INFORMATION ON OUR Pb-FREE STRATEGY AND SOLDERING DETAILS, PLEASE DOWNLOAD THE ON SEMICONDUCTOR SOLDERING AND MOUNTING TECHNIQUES REFERENCE MANUAL, SOLDERRM/D.

1.000

RECOMMENDED MOUNTING FOOTPRINT*

| STYLE 4: |
|---------------------------|
| PIN 1. CATHODE |
| CATHODE |
| ANODE |

STYLE 5: PIN 1. GATE 2. SOURCE 3. DRAIN

Electronic versions are uncontrolled except when accessed directly from the Document Repository. **DOCUMENT NUMBER:** 98ASB15184C Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. **DESCRIPTION:** SC75-3 1.60x0.80x0.80, 1.00P PAGE 1 OF 1







SOT-1123 0.80x0.60x0.37, 0.35P CASE 524AA ISSUE D

DATE 18 JAN 2024

NOTES:

- 1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 2018.
- 2. CONTROLLING DIMENSION: MILLIMETERS.
- 3. MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH.
 MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS
 OF BASE MATERIAL.
- DIMENSIONS D AND E DO NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR GATE BURRS.







RECOMMENDED MOUNTING FOOTPRINT

*For additional information on our Pb-Free strategy and soldering details, please download th e □N Semiconductor Soldering and Mounting Techniques Reference manual, S□LDERRM/D.

| - : | D | -A B |
|----------------|---|---------|
| | | E |



THP VIFW

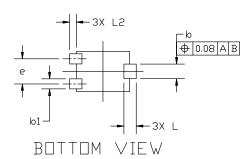

GENERIC MARKING DIAGRAM*



X = Specific Device Code

M = Date Code

*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "•", may or may not be present. Some products may not follow the Generic Marking.

| STYLE 1: |
|---------------------------|
| PIN 1. BASE |
| EMITTER |
| 3 COLLECTOR |

STYLE 2: PIN 1. ANODE 2. N/C 3. CATHODE

STYLE 3: PIN 1. ANODE 2. ANODE 3. CATHODE

STYLE 4: PIN 1. CATHODE 2. CATHODE 3. ANODE STYLE 5: PIN 1. GATE 2. SOURCE

| DOCUMENT NUMBER: | 98AON23134D | Electronic versions are uncontrolled except when accessed directly from the Document Repos Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. | | |
|------------------|--------------------------------|---|-------------|--|
| DESCRIPTION: | SOT-1123 0.80x0.60x0.37, 0.35P | | PAGE 1 OF 1 | |






SOT-723 1.20x0.80x0.50, 0.40P CASE 631AA ISSUE E


DATE 24 JAN 2024


MILLIMETERS

NOTES:


- 1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 2018.
- 2. CONTROLLING DIMENSION: MILLIMETERS.
- 3. MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH, MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF BASE MATERIAL.
- 4. DIMENSIONS D AND E DO NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS.







DIM MIN. NDM. MAX. 0.45 0.50 0.55 Α 0.15 0.21 0.27 b b1 0.25 0.31 0.37 0.07 0.12 0.17 \subset D 1.25 1.15 1.20 Ε 0.75 0.80 0.85 0.40 BSC е Н 1.20 1.15 1.25 0.29 REF L L2 0.15 0.20 0.25



RECOMMENDED MOUNTING FOOTPRINT

*For additional information on our Pb-Free strategy and soldering details, please download the DN Semiconductor Soldering and Mounting Techniques Reference Manual, SDLDERRM/D.

GENERIC MARKING DIAGRAM*



XX = Specific Device Code M = Date Code

*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "•", may or may not be present. Some products may not follow the Generic Marking.

| STYLE 1: | STYLE 2: | STYLE 3: | STYLE 4: | STYLE 5: |
|-----------------------------|---------------------------|---------------------------|-------------------------|--------------------------|
| PIN 1. BASE | PIN 1. ANODE | PIN 1. ANODE | PIN 1. CATHODE | PIN 1. GATE |
| EMITTER | 2. N/C | 2. ANODE | 2. CATHODE | SOURCE |
| COLLECTOR | CATHODE | CATHODE | ANODE | DRAIN |

| DOCUMENT NUMBER: | 98AON12989D | Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. | |
|------------------|-------------------------------|---|-------------|
| DESCRIPTION: | SOT-723 1.20x0.80x0.50, 0.40P | | PAGE 1 OF 1 |

onsemi, Onsemi, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. Onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA class 3 medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:

 $\textbf{Technical Library:} \ \underline{www.onsemi.com/design/resources/technical-documentation}$

onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at

www.onsemi.com/support/sales