

MOSFET – Single N-Channel, POWERTRENCH®

100 V, 2.2 A, 243 m Ω

FDMA86108LZ

General Description

This device has been designed to provide maximum efficiency and thermal performance for synchronous buck converters. The low $r_{DS(on)}$ and gate charge provide excellent switching performance.

Features

- Max $r_{DS(on)} = 243 \text{ m}\Omega$ at $V_{GS} = 10 \text{ V}$, $I_D = 2.2 \text{ A}$
- Max $r_{DS(on)} = 366 \text{ m}\Omega$ at $V_{GS} = 4.5 \text{ V}$, $I_D = 1.8 \text{ A}$
- Low Profile 0.8 mm Maximum in the New Package MicroFET[™]
 2 x 2 mm
- Free from Halogenated Compounds and Antimony Oxides
- This Device is Pb-Free and is RoHS Compliant

Application

• DC-DC Buck Converters


MOSFET MAXIMUM RATINGS (T_A = 25°C unless otherwise noted)

Symbol	Parameter	Ratings	Unit
V _{DS}	Drain to Source Voltage	100	V
V_{GS}	Gate to Source Voltage	±20	V
I _D	Drain Current - Continuous T _A = 25°C (Note 1a)	2.2	Α
	- Pulsed (Note 3)	6	
P_{D}	Power dissipation T _A = 25°C (Note 1a)	2.4	W
	Power dissipation T _A = 25°C (Note 1b)		
T _{J,} T _{STG}	Operating and Storage Junction Temperature Range	-55 to +150	°C

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

THERMAL CHARACTERISTICS

Symbol	mbol Parameter		Unit	
$R_{\theta JA}$	Thermal Resistance, Junction-to-Ambient (Note 1a)	nt 52 °C/\		
$R_{\theta JA}$	Thermal Resistance, Junction-to-Ambient (Note 1b)	145		



WDFN6 (MicroFET™ 2 x 2) CASE 511CZ

MARKING DIAGRAM




&Z = Assembly Plant Code &2 = Numeric Date Code

&K = Lot Code

108 = Specific Device Code

PIN ASSIGNMENT



ORDERING INFORMATION

See detailed ordering and shipping information on page 2 of this data sheet.

PACKAGE MARKING AND ORDERING INFORMATION

Device Marking	Device	Package	Shipping [†]		
108	FDMA86108LZ	WDFN6 (MicroFET 2x2) 3000 Unit (Pb-Free)	3000 Units / Tape & Reel		

[†]For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.


ELECTRICAL CHARACTERISTICS (T_{.I} = 25°C unless otherwise noted)

Symbol	Parameter	Test Condition	Min	Тур	Max	Unit
OFF CHARA	CTERISTICS					
BV _{DSS}	Drain to Source Breakdown Voltage	$I_D = 250 \mu A, V_{GS} = 0 V$	100			V
$\frac{\Delta BV_{DSS}}{\Delta T_{J}}$	Breakdown Voltage Temperature Coefficient	I_D = 250 μ A, referenced to 25°C		74		mV/°C
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} = 80 V, V _{GS} = 0 V			1	μΑ
I _{GSS}	Gate to Source Leakage Current	V _{GS} = ±20 V, V _{DS} = 0 V			±10	μΑ
ON CHARAC	CTERISTICS					
V _{GS(th)}	Gate to Source Threshold Voltage	$V_{GS} = V_{DS}, I_D = 250 \mu A$	1.0	2.2	3.0	V
$\frac{\Delta V_{GS(th)}}{\Delta T_J}$	Gate to Source Threshold Voltage Temperature Coefficient	I_D = 250 μ A, referenced to 25°C		-5		mV/°C
r _{DS(on)}	Static Drain to Source On Resistance	V _{GS} = 10 V, I _D = 2.2 A		188	243	mΩ
		V _{GS} = 4.5 V, I _D = 1.8 A		275	366	
		V _{GS} = 10 V, I _D = 2.2 A, T _J = 125°C		345	446	
9FS	Forward Transconductance	V _{DD} = 5 V, I _D = 2.2 A		3.7		S
DYNAMIC C	HARACTERISTICS		•		•	
C _{iss}	Input Capacitance	V _{DS} = 50 V, V _{GS} = 0 V, f = 1 MHz		116	163	163 35 pF
C _{oss}	Output Capacitance	1		23	35	
C _{rss}	Reverse Transfer Capacitance	7		1	5	
R _g	Gate Resistance		0.1	1.0	3.0	Ω
SWITCHING	CHARACTERISTICS					
td _(on)	Turn – On Delay Time	V _{DD} = 50 V, I _D = 2.2 A,		4.2	10	ns
t _r	Rise Time	$V_{GS} = 10 \text{ V}, R_{GEN} = 6 \Omega$		1.7	10	
t _{D(off)}	Turn – Off Delay Time	7		7.6	15	
t _f	Fall Time	7		1.7	10	
Q _{g(TOT)}	Total Gate Charge	$V_{GS} = 0V \text{ to } 10 \text{ V}, V_{DD} = 50 \text{ V},$ $i_D = 2.2 \text{ A}$		2.1	3.0	nC
		$V_{GS} = 0V \text{ to } 4.5 \text{ V}, V_{DD} = 50 \text{ V},$ $i_D = 2.2 \text{ A}$		1.1	1.6	
Q _{gs}	Gate to Source Charge	V _{DD} = 50 V, i _D = 2.2 A		0.5		
Q_{gd}	Gate to Drain "Miller" Charge			0.5		
DRAIN-SOU	IRCE DIODE CHARACTERISTICS				_	
V _{SD}	Source to Drain Diode Forward Voltage	V _{GS} = 0 V, I _S = 2.2 A (Note 2)		0.9	1.2	V
t _{rr}	Reverse Recovery Time	I _F = 2.2 A, di/dt = 100 A/μs		32	51	ns
Q _{rr}	Reverse Recovery Charge			20	32	nC
	•	•	•	•	•	•


Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

NOTES:

1. $R_{\theta JA}$ is determined with the device mounted on a 1 in² pad 2 oz copper pad on a 1.5 × 1.5 in. board of FR-4 material. $R_{\theta JC}$ is guaranteed by design while $R_{\theta JA}$ is determined by the user's board design.



a) 52°C/W when mounted on a 1 in² pad of 2 oz copper.



b) 145°C/W when mounted on a minimum pad of 2 oz copper.

- 2. Pulse Test: Pulse Width < 300 $\mu s,$ Duty cycle < 2.0%.
- 3. Pulsed $I_{\mbox{\scriptsize D}}$ measured at 250 $\mu\mbox{\scriptsize S},$ refer to Figure 11 SOA graph for more details.

TYPICAL CHARACTERISTICS

(T_J = 25°C unless otherwise noted)




Figure 1. On-Region Characteristics




Figure 2. Normalized On-Resistance vs Drain Current and Gate Voltage




Figure 3. Normalized On-Resistance vs Junction Temperature




Figure 4. On-Resistance vs Gate to Source Voltage




Figure 5. Transfer Characteristics




Figure 6. Source to Drain Diode Forward Voltage vs Source Current

TYPICAL CHARACTERISTICS (continued)

 $(T_J = 25^{\circ}C \text{ unless otherwise noted})$




Figure 7. Gate Charge Characteristics




Figure 9. Gate Leakage Current vs.
Gate to Source Voltage





Figure 8. Capacitance vs Drain to Source Voltage



V_{DS}, DRAIN to SOURCE VOLTAGE (V)

Figure 10. Forward Bias Safe Operating Area

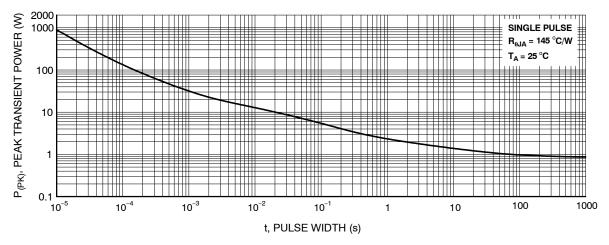


Figure 11. Single Pulse Maximum Power Dissipation

TYPICAL CHARACTERISTICS (continued)

 $(T_J = 25^{\circ}C \text{ unless otherwise noted})$

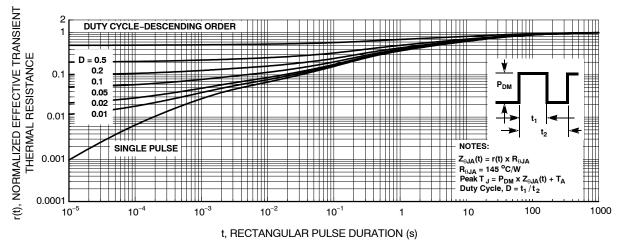


Figure 12. Junction to Ambient Transient Thermal Response Curve


POWERTRENCH is a registered trademark of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries.


MicroFET is trademark of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries.





WDFN6 2x2, 0.65P CASE 511CZ ISSUE O


DATE 31 JUL 2016





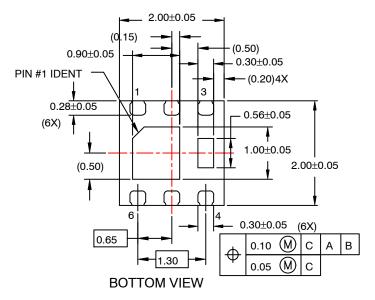





LAND PATTERN OPT 1

NOTES:

- A. PACKAGE DOES NOT FULLY CONFORM TO JEDEC MO-229 REGISTRATION
- B. DIMENSIONS ARE IN MILLIMETERS.
- C. DIMENSIONS AND TOLERANCES PER ASME Y14.5M, 2009.
- D. LAND PATTERN RECOMMENDATION IS EXISTING INDUSTRY LAND PATTERN.

DOCUMENT NUMB	ER: 98AON13614G	Electronic versions are uncontrolled except when accessed directly from the Document Reposit Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.		
DESCRIPTION	ON: WDFN6 2X2, 0.65P		PAGE 1 OF 1	

onsemi and ONSEMI are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

onsemi, Onsemi, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. Onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA class 3 medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:

 $\textbf{Technical Library:} \ \underline{www.onsemi.com/design/resources/technical-documentation}$

onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at

www.onsemi.com/support/sales