

# **MOSFET** - N-Channel, POWERTRENCH®

40 V, 49 A, 2.2 m $\Omega$ 

# **FDMS8460**

#### **General Description**

This N-Channel MOSFET is produced using onsemi's advanced POWERTRENCH® process that has been especially tailored to minimize the on-state resistance and yet maintain superior switching performance.

#### **Features**

- Max  $R_{DS(on)} = 2.2 \text{ m}\Omega$  at  $V_{GS} = 10 \text{ V}$ ,  $I_D = 25 \text{ A}$
- Max  $R_{DS(on)} = 3.0 \text{ m}\Omega$  at  $V_{GS} = 4.5 \text{ V}$ ,  $I_D = 21.7 \text{ A}$
- Advanced Package and Silicon Combination for Low R<sub>DS(on)</sub>
- MSL1 Robust Package Design
- 100% UIL Tested
- RoHS Compliant

#### **Applications**

• DC-DC Conversion

### MAXIMUM RATINGS (T<sub>A</sub> = 25°C unless otherwise noted)

Symbol	Parameter	Value	Unit
V <sub>DS</sub>	Drain to Source Voltage	40	V
V <sub>GS</sub>	Gate to Source Voltage	±20	V
I <sub>D</sub>	Drain Current:  - Continuous (Package limited) $T_C = 25^{\circ}C$ - Continuous (Silicon limited) $T_C = 25^{\circ}C$ - Continuous $T_A = 25^{\circ}C$ (Note 1a)  - Pulsed	49 167 25 160	A
E <sub>AS</sub>	Single Pulse Avalanche Energy (Note 3)	864	mJ
P <sub>D</sub>	Power Dissipation: T <sub>C</sub> = 25°C T <sub>A</sub> = 25°C (Note 1a)	104 2.5	W
T <sub>J</sub> , T <sub>STG</sub>	Operating and Storage Junction Temperature Range	–55 to +150	°C

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.


#### THERMAL CHARACTERISTICS

Symbol	Parameter	Value	Unit
$R_{ heta JC}$	Thermal Resistance, Junction to Case	1.2	°C/W
$R_{ heta JA}$	Thermal Resistance, Junction to Ambient (Note 1a)	50	

1



CASE 483AE



**N-Channel MOSFET** 

#### MARKING DIAGRAM



\$Y = onsemi Logo &Z = Assembly Plant Code = Data Code (Year & Week) &3 &K = Lot FDMS8460 = Specific Device Code

#### **ORDERING INFORMATION**


See detailed ordering and shipping information on page 6 of this data sheet.

# $\textbf{ELECTRICAL CHARACTERISTICS} \ (T_J = 25^{\circ}\text{C unless otherwise noted})$

Symbol	Parameter	Test Condition	Min	Тур	Max	Unit
OFF CHARA	ACTERISTICS		-			
BV <sub>DSS</sub>	Drain to Source Breakdown Voltage	$I_D = 250 \mu A, V_{GS} = 0 V$	40	-	_	V
ΔBV <sub>DSS</sub> /ΔT <sub>J</sub>	Breakdown Voltage Temperature Coefficient	$I_D$ = 250 $\mu$ A, referenced to 25°C	-	32	-	mV/°C
I <sub>DSS</sub>	Zero Gate Voltage Drain Current	V <sub>DS</sub> = 32 V, V <sub>GS</sub> = 0 V	-	-	1	μΑ
I <sub>GSS</sub>	Gate to Source Leakage Current, Forward	$V_{GS} = \pm 20 \text{ V}, V_{DS} = 0 \text{ V}$	_	-	±100	nA
ON CHARAC	CTERISTICS					
V <sub>GS(th)</sub>	Gate to Source Threshold Voltage	$V_{GS} = V_{DS}, I_D = 250 \mu A$	1.0	1.9	3.0	V
ΔV <sub>GS(th)</sub> /ΔΤ <sub>J</sub>	Gate to Source Threshold Voltage Temperature Coefficient	$I_D$ = 250 $\mu$ A, referenced to 25°C	-	-7.5	-	mV/°C
R <sub>DS(on)</sub>	Static Drain to Source On Resistance	V <sub>GS</sub> = 10 V, I <sub>D</sub> = 25 A	-	2.0	2.2	mΩ
		V <sub>GS</sub> = 4.5 V, I <sub>D</sub> = 21.7 A	-	2.6	3.0	
		V <sub>GS</sub> = 10 V, I <sub>D</sub> = 25 A, T <sub>J</sub> = 125°C	-	2.6	3.3	
9FS	Forward Transconductance	V <sub>DS</sub> = 5 V, I <sub>D</sub> = 25 A	-	137	_	S
DYNAMIC C	HARACTERISTICS		•		•	
C <sub>iss</sub>	Input Capacitance	V <sub>DS</sub> = 20 V, V <sub>GS</sub> = 0 V, f = 1 MHz	-	5415	7205	pF
C <sub>oss</sub>	Output Capacitance		-	1470	1955	pF
C <sub>rss</sub>	Reverse Transfer Capacitance		-	170	250	pF
$R_{g}$	Gate Resistance	f = 1MHz	0.1	1.4	3.1	Ω
WITCHING	CHARACTERISTICS		•		•	-
t <sub>d(on)</sub>	Turn-On Delay Time	$V_{DD} = 20 \text{ V}, I_D = 25 \text{ A}, V_{GS} = 10 \text{ V},$	-	19	35	ns
t <sub>r</sub>	Rise Time	$R_{GEN} = 6 \Omega$	_	9	19	ns
t <sub>d(off)</sub>	Turn-Off Delay Time		-	48	78	ns
t <sub>f</sub>	Fall Time		_	7	14	ns
Qg	Total Gate Charge	$V_{GS} = 0 \text{ V to } 10 \text{ V}, V_{DD} = 20 \text{ V}, I_D = 25 \text{ A}$	_	78	110	nC
		$V_{GS}$ = 0 V to 4.5 V, $V_{DD}$ = 20 V, $I_D$ = 25 A	-	36	51	nC
Q <sub>gs</sub>	Gate to Source Charge	V <sub>DD</sub> = 20 V, I <sub>D</sub> = 25 A	-	15	_	nC
$Q_{gd}$	Gate to Drain "Miller" Charge		_	10	_	nC
DRAIN-SOU	RCE DIODE CHARACTERISTICS					
V <sub>SD</sub>	Source to Drain Diode Forward Voltage	V <sub>GS</sub> = 0 V, I <sub>S</sub> = 25 A (Note 2)	-	0.8	1.3	V
		V <sub>GS</sub> = 0 V, I <sub>S</sub> = 2.1 A (Note 2)	-	0.7	1.2	1
t <sub>rr</sub>	Reverse Recovery Time	I <sub>F</sub> = 25 A, di/dt = 100 A/μs	_	53	85	ns
Q <sub>rr</sub>	Reverse Recovery Charge			40	64	nC

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product

#### NOTES:



a. 50 °C/W when mounted on a 1 in<sup>2</sup> pad of 2 oz copper.



b. 125  $^{\circ}$ C/W when mounted on a minimum pad of 2 oz copper.

- 2. Pulse Test: Pulse Width < 300  $\mu s$  , Duty cycle < 2.0%. 3. Starting T  $_J$  = 25°C, L = 0.3 mH, I  $_{AS}$  = 24 A, V  $_{DD}$  = 40 V, V  $_{GS}$  = 10 V

performance may not be indicated by the Electrical Characteristics if operated under different conditions.

1.  $R_{\theta,JA}$  is determined with the device mounted on a 1 in<sup>2</sup> pad 2 oz copper pad on a 1.5 × 1.5 in. board of FR-4 material.  $R_{\theta,CA}$  is determined by the user's board design.

#### **TYPICAL CHARACTERISTICS**

 $(T_J = 25^{\circ}C \text{ unless otherwise noted})$ 




Figure 1. On Region Characteristics




Figure 3. Normalized On Resistance vs. Junction Temperature




Figure 5. Transfer Characteristics




Figure 2. Normalized On-Resistance vs. Drain Current and Gate Voltage




Figure 4. On-Resistance vs. Gate to Source Voltage




Figure 6. Source to Drain Diode Forward Voltage vs. Source Current

## TYPICAL CHARACTERISTICS (continued)

 $(T_J = 25^{\circ}C \text{ unless otherwise noted})$ 




Figure 7. Normalized On Resistance vs. Junction Temperature




Figure 8. On-Resistance vs. Gate to Source Voltage




Figure 9. Transfer Characteristics




Figure 10. Source to Drain Diode Forward Voltage vs. Source Current




Figure 11. Gate Charge Characteristics




Figure 12. Capacitance vs. Drain to Source Voltage

#### TYPICAL CHARACTERISTICS (continued)

 $(T_J = 25^{\circ}C \text{ unless otherwise noted})$ 




Figure 13. Unclamped Inductive Switching Capability




Figure 14. Maximum Continuous Drain Current vs. Case Temperature




Figure 15. Forward Bias Safe Operating Area




Figure 16. Single Pulse Maximum Power Dissipation

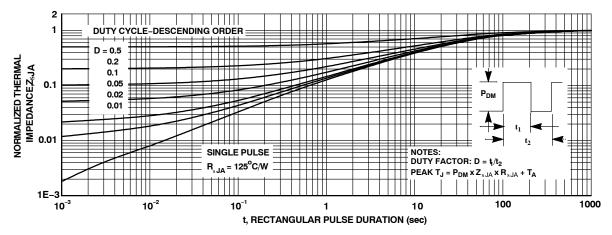


Figure 17. Transient Thermal Response Curve

#### PACKAGE MARKING AND ORDERING INFORMATION

Device Marking	Device	Package	Shipping <sup>†</sup>
FDMS8460	FDMS8460	Power 56 (PQFN8) (Pb-Free / Halogen Free)	3,000/Tape&Reel

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

POWERTRENCH is registered trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries.

L2

L4

Z

θ

0.05

0.34

0°

0.18

0.44


0.34 REF

0.30

0.54

12°



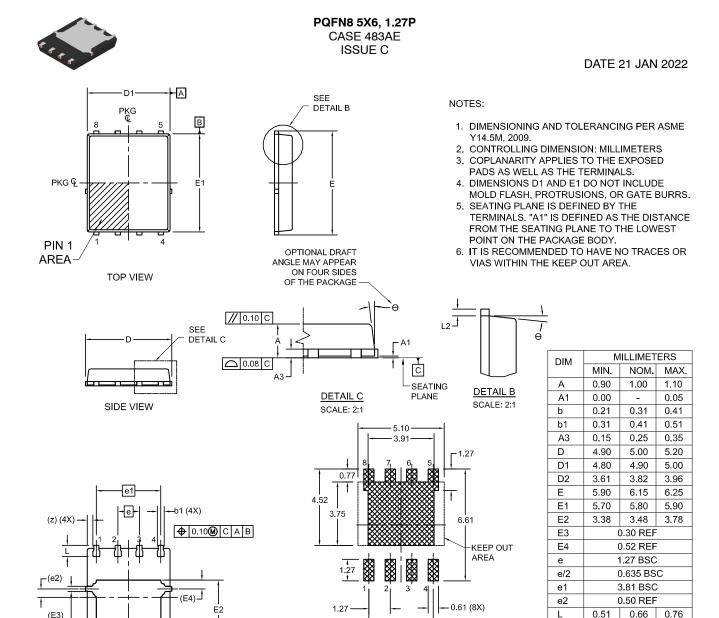

DOCUMENT NUMBER:	98AON13655G	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.		
DESCRIPTION:	PQFN8 5X6, 1.27P		PAGE 1 OF 1	

MANUAL, SOLDERRM/D.

3.81

LAND PATTERN

RECOMMENDATION

PB-FREE STRATEGY AND SOLDERING

DETAILS, PLEASE DOWNLOAD THE ON SEMICONDUCTOR SOLDERING AND MOUNTING TECHNIQUES REFERENCE

\*FOR ADDITIONAL INFORMATION ON OUR

onsemi and ONSEMI are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

**BOTTOM VIEW** 

(2X

لـ (4X) لـ

b (8X)

onsemi, Onsemi, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at <a href="www.onsemi.com/site/pdf/Patent-Marking.pdf">www.onsemi.com/site/pdf/Patent-Marking.pdf</a>. Onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA class 3 medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase

#### ADDITIONAL INFORMATION

**TECHNICAL PUBLICATIONS:** 

 $\textbf{Technical Library:} \ \underline{www.onsemi.com/design/resources/technical-documentation}$ 

onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at

www.onsemi.com/support/sales