STEALTH™ Rectifier

15 A, 600 V

ISL9R1560G2-F085

Description

The ISL9R1560G2−F085 is Stealth diode optimized for low loss performance in high frequency hard switched applications. The Stealth family exhibits low reverse recovery current ($I_{RM(REC)}$) and exceptionally soft recovery under typical operating conditions.

This device is intended for use as a free wheeling or boost diode in power supplies and other power switching applications. The low I_{RRM} and short ta phase reduce loss in switching transistors. The soft recovery minimizes ringing, expanding the range of conditions under which the diode may be operated without the use of additional snubber circuitry. Consider using the Stealth] diode with an SMPS IGBT to provide the most efficient and highest power density design at lower cost.

Features

- High Speed Switching (t_{rr} = 26 ns(Typ.) @ I_F = 15 A)
- Low Forward Voltage (V_F = 2.2 V(Max) @ I_F = 15 A)
- Avalanche Energy Rated
- AEC−Q101 Qualified and PPAP Capable
- This Device is Pb−Free

Applications

- Automotive DC/DC Converter
- Automotive On Board Charger
- Switching Power Supply
- Power Switching Circuits

ON Semiconductor®

www.onsemi.com

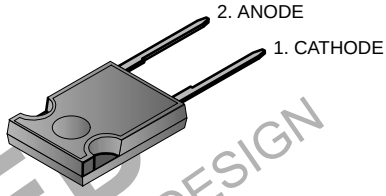

TO−247−2LD
CASE 340CL



MARKING DIAGRAM



$Y	= ON Semiconductor Logo
&Z	= Assembly Plant Code
&3	= Numeric Date Code
&K	= Lot Code
R1560G2	= Specific Device Code

ORDERING INFORMATION

See detailed ordering and shipping information on page 2 of this data sheet.

ABSOLUTE MAXIMUM RATINGS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Value	Unit
Peak Repetitive Reverse Voltage	V_{RRM}	600	V
Working Peak Reverse Voltage	V_{RWM}	600	V
DC Blocking Voltage	V_R	600	V
Average Rectified Forward Current (T_C = 25°C)	$I_{F(AV)}$	15	A
Non−repetitive Peak Surge Current (Halfwave 1 Phase 50 Hz)	I_{FSM}	45	A
Avalanche Energy (1 A, 40 mH)	E_{AVL}	20	mJ
Operating Junction and Storage Temperature	T_J, T_{STG}	−55 to +175	°C

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

PACKAGE MARKING AND ORDERING INFORMATION

Device	Device Marking	Package	Tube	Quantity
ISL9R1560G2−F085	R1560G2	TO−247−2LD	−	30

THERMAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Value	Unit
Maximum Thermal Resistance, Junction to Case	$R_{\theta JC}$	0.93	°C/W
Maximum Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	45	°C/W

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted)

Parameter	Symbol	Test Conditions		Min	Typ	Max	Unit
Instantaneous Reverse Current	I_R	V_R = 600 V	T_C = 25°C	−	−	100	μA
			T_C = 175°C	−	−	2	mA
Instantaneous Forward Voltage (Note 1)	V_{FM}	I_F = 15 A	T_C = 25°C	−	1.8	2.2	V
			T_C = 175°C	−	1.35	2	V
Reverse Recovery Time (Note 2)	t_{rr}	I_F = 1 A, di/dt = 200 A/μs, V_{CC} = 390 V	T_C = 25°C	−	20	30	ns
		I_F = 15 A, di/dt = 200 A/μs, V_{CC} = 390 V	T_C = 25°C	−	26	40	ns
			T_C = 175°C	−	114	−	ns
Reverse Recovery Time	t_a	I_F = 15 A, di/dt = 200 A/μs, V_{CC} = 390 V	T_C = 25°C	−	15	−	ns
	t_b			−	11	−	ns
Reverse Recovery Charge	Q_{rr}			−	40	−	nC
Avalanche Energy	E_{AVL}	I_{AV} = 1 A, L = 40 mH		20	−	−	mJ

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

1. Pulse: Test Pulse Width = 300 μs, Duty Cycle = 2%
2. Guaranteed by design.

TYPICAL PERFORMANCE CHARACTERISTICS

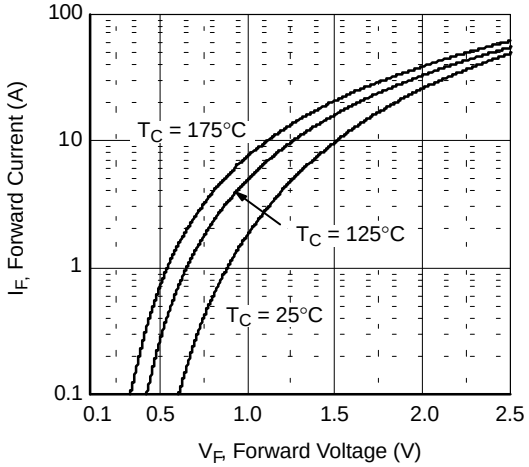

Figure 1. Typical Forward Voltage Drop vs. Forward Current

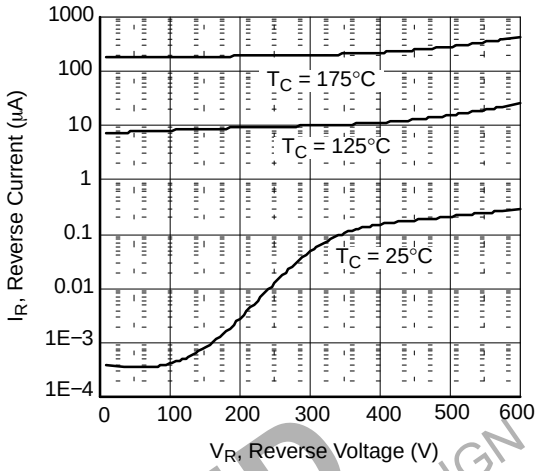

Figure 2. Typical Reverse Current vs. Reverse Voltage

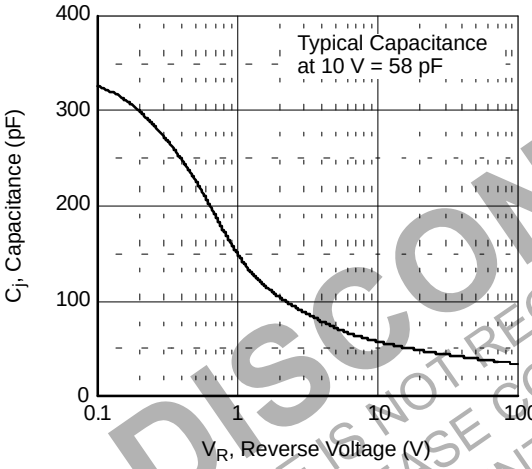

Figure 3. Typical Junction Capacitance

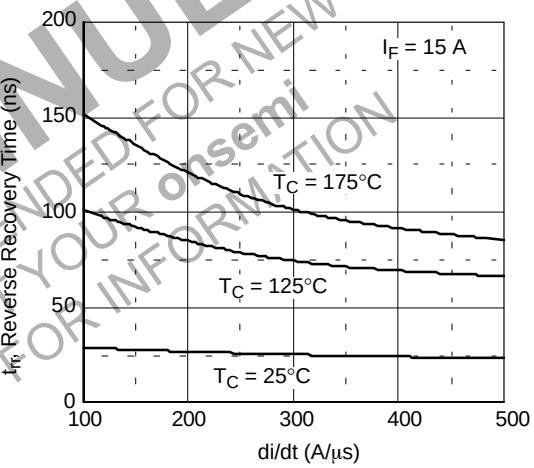

Figure 4. Typical Reverse Recovery Time vs. di/dt

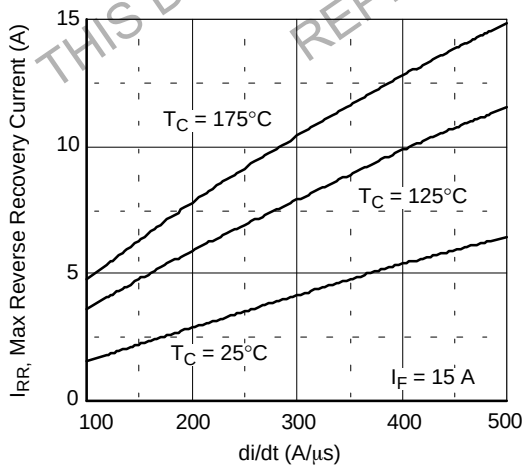

Figure 5. Typical Reverse recovery Current vs. di/dt

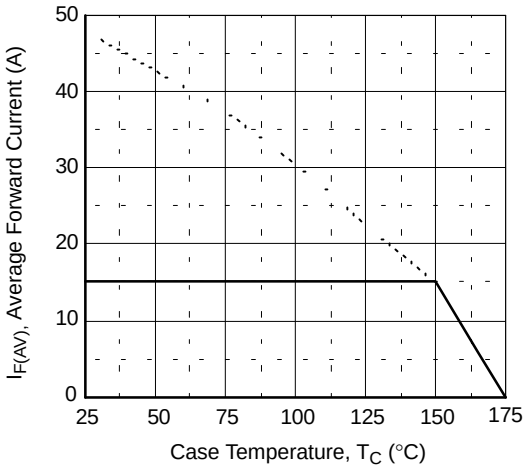

Figure 6. Maximum Reverse Recovery Current vs. dI_F/dt

TYPICAL PERFORMANCE CHARACTERISTICS (continued)

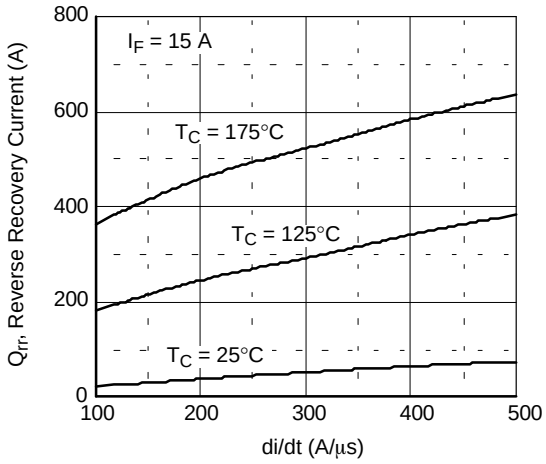

Figure 7. Reverse Recovery Charge

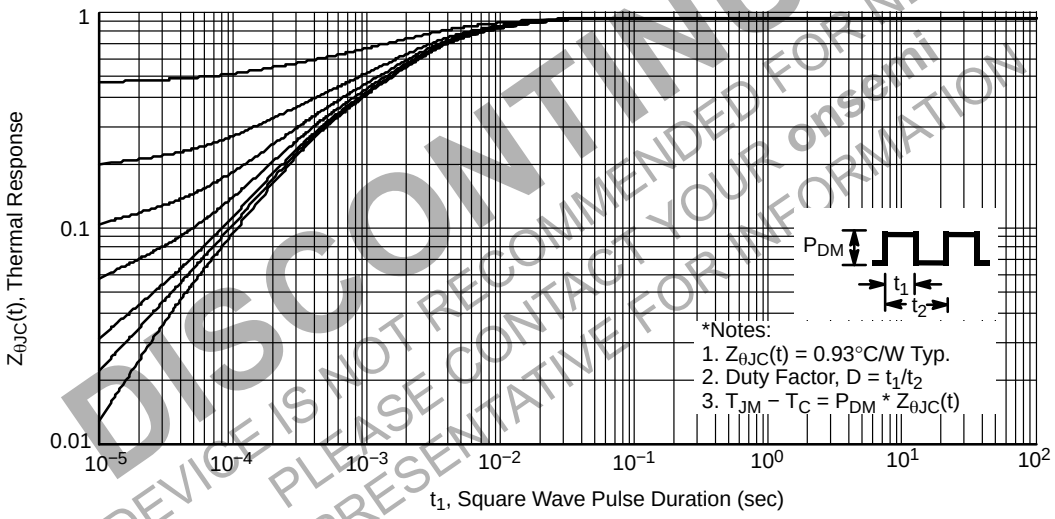

Figure 8. Transient Thermal Response Curve

TEST CIRCUIT AND WAVEFORMS

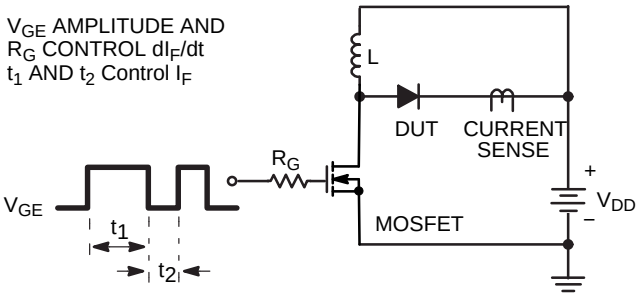

Figure 9. t_{rr} Test Circuit

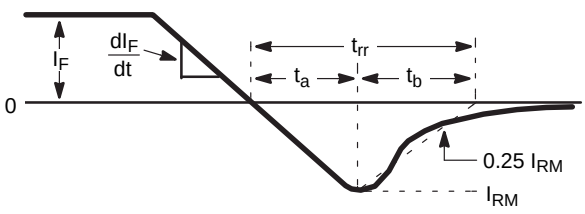

Figure 10. t_{rr} Waveforms and Definitions

I = 1 A
L = 40 mH
R < 0.1 Ω
V_{DD} = 50 V
$E_{AVL} = 1/2LI^2 [V_{R(AVL)}/(V_{R(AVL)} - V_{DD})]$
Q_1 = IGBT (BV_{CES} > DUT $V_{R(AVL)}$)

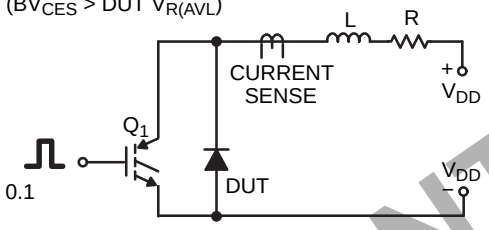

Figure 11. Avalanche Energy Test Circuit

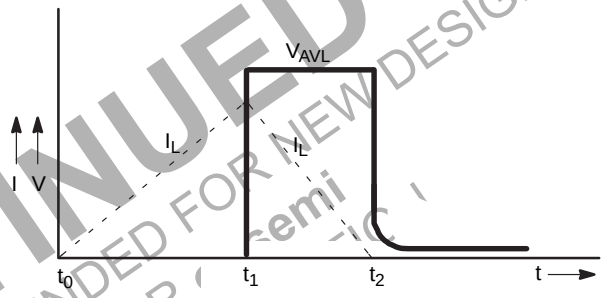

Figure 12. Avalanche Current and Voltage Waveforms

TO−247−2LD
CASE 340CL
ISSUE A

DATE 03 DEC 2019

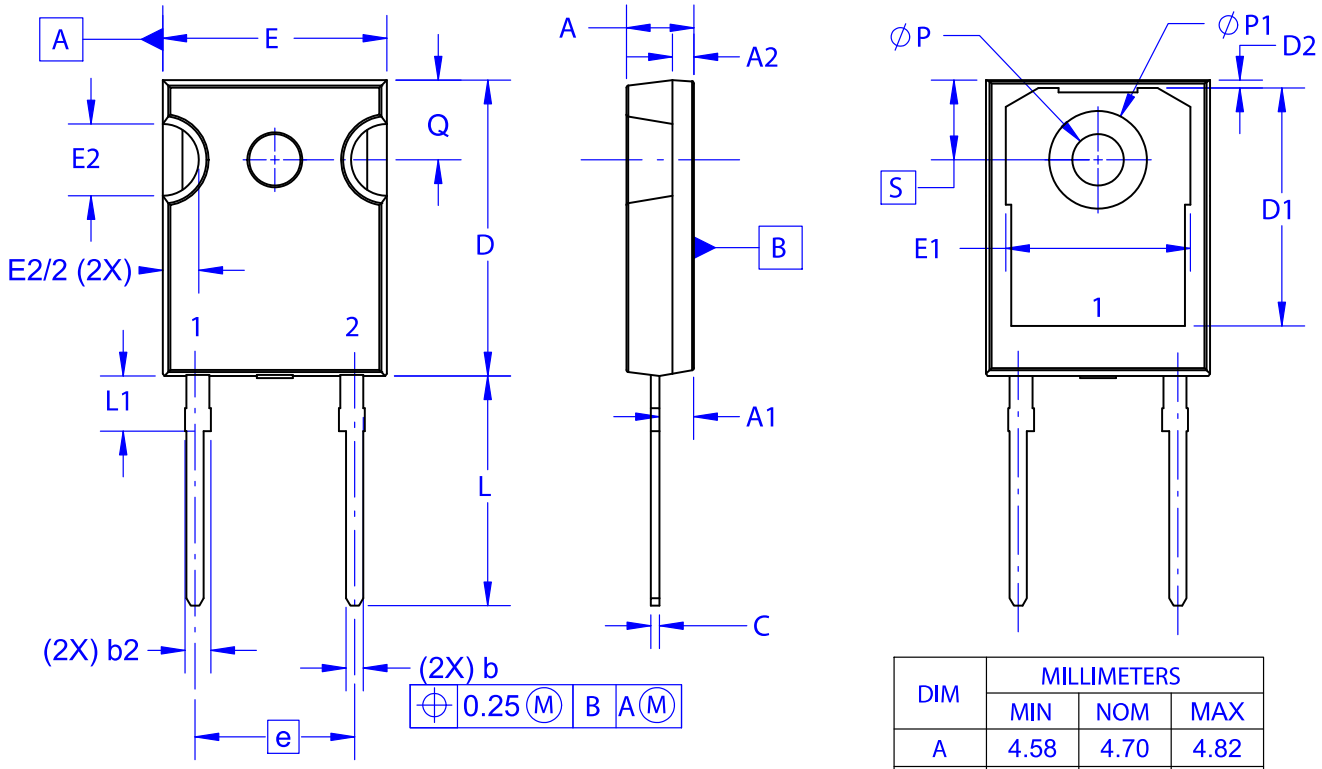

NOTES: UNLESS OTHERWISE SPECIFIED.

A. DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD FLASH, AND TIE BAR EXTRUSIONS.
B. ALL DIMENSIONS ARE IN MILLIMETERS.
C. DRAWING CONFORMS TO ASME Y14.5 - 2009.
D. DIMENSION A1 TO BE MEASURED IN THE REGION DEFINED BY L1.
E. LEAD FINISH IS UNCONTROLLED IN THE REGION DEFINED BY L1.

DIM	MILLIMETERS		
	MIN	NOM	MAX
A	4.58	4.70	4.82
A1	2.29	2.40	2.66
A2	1.30	1.50	1.70
b	1.17	1.26	1.35
b2	1.53	1.65	1.77
c	0.51	0.61	0.71
D	20.32	20.57	20.82
D1	16.37	16.57	16.77
D2	0.51	0.93	1.35
E	15.37	15.62	15.87
E1	12.81	~	~
E2	4.96	5.08	5.20
e	~	11.12	~
L	15.75	16.00	16.25
L1	3.69	3.81	3.93
ØP	3.51	3.58	3.65
ØP1	6.61	6.73	6.85
Q	5.34	5.46	5.58
S	5.34	5.46	5.58

GENERIC MARKING DIAGRAM*

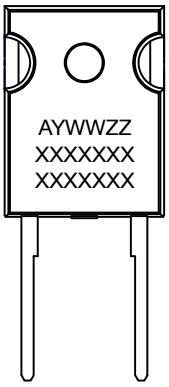

XXXX = Specific Device Code
A = Assembly Location
Y = Year
WW = Work Week
ZZ = Assembly Lot Code

*This information is generic. Please refer to device data sheet for actual part marking. Pb−Free indicator, “G” or microdot “▪”, may or may not be present. Some products may not follow the Generic Marking.

DOCUMENT NUMBER:	**98AON13850G**	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped “CONTROLLED COPY” in red.
DESCRIPTION:	**TO−247−2LD**	**PAGE 1 OF 1**

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:
Technical Library: www.onsemi.com/design/resources/technical−documentation
onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support
For additional information, please contact your local Sales Representative at www.onsemi.com/support/sales