

## NPN Silicon Power Transistors High Voltage Planar

### MJW18020

The MJW18020 planar High Voltage Power Transistor is specifically Designed for motor control applications, high power supplies and UPS's for which the high reproducibility of DC and Switching parameters minimizes the dead time in bridge configurations.

#### **Features**

- High and Excellent Gain Linearity
- Fast and Very Tight Switching Times Parameters tsi and tfi
- Very Stable Leakage Current due to the Planar Structure
- High Reliability
- Pb-Free Package is Available\*

### **MAXIMUM RATINGS**

Rating	Symbol	Value	Unit
Collector-Emitter Sustaining Voltage	V <sub>CEO</sub>	450	Vdc
Collector-Emitter Breakdown Voltage	V <sub>CES</sub>	1000	Vdc
Collector-Base Voltage	V <sub>CBO</sub>	1000	Vdc
Emitter-Base Voltage	V <sub>EBO</sub>	9.0	Vdc
Collector Current - Continuous - Peak (Note 1)	I <sub>C</sub>	30 45	Adc
Base Current – Continuous – Peak (Note 1)	I <sub>B</sub>	6.0 10	Adc
Total Power Dissipation @ T <sub>C</sub> = 25°C Derate Above 25°C	P <sub>D</sub>	250 2.0	W W/°C
Operating and Storage Junction Temperature Range	T <sub>J</sub> , T <sub>stg</sub>	-65 to +150	°C

### THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction-to-Case	$R_{\theta JC}$	0.5	°C/W
Thermal Resistance, Junction-to-Ambient	$R_{\theta JA}$	50	°C/W
Maximum Lead Temperature for Soldering Purposes: 1/8" from Case for 5 Seconds	TL	275	°C


Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. Pulse Test: Pulse Width = 5  $\mu$ s, Duty Cycle  $\leq$  10%.


# \*For additional information on our Pb-Free strategy and soldering details, please download the **onsemi** Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

1

### 30 AMPERES 1000 VOLTS BV<sub>CES</sub> 450 VOLTS BV<sub>CEO</sub> 250 WATTS



#### MARKING DIAGRAM



= Assembly Location

Y = Year WW = Work Week G = Pb-Free Package

### **ORDERING INFORMATION**

Device	Package	Shipping
MJW18020	TO-247	30 Units/Rail
MJW18020G	TO-247 (Pb-Free)	30 Units/Rail

### MJW18020

### **ELECTRICAL CHARACTERISTICS** ( $T_C = 25^{\circ}C$ unless otherwise noted)

Charac	Symbol	Min	Тур	Max	Unit	
OFF CHARACTERISTICS	<u> </u>	· L	1	I.		
Collector–Emitter Sustaining Voltage (I <sub>C</sub> = 100 mAdc, I <sub>B</sub> = 0)	V <sub>CEO(sus)</sub>	450	_	_	Vdc	
Collector Cutoff Current ( $V_{CE}$ = Rated $V_{CEO}$ , $I_B$ = 0)	I <sub>CEO</sub>	_	-	100	μAdc	
Collector Cutoff Current (V <sub>CE</sub> = Rated \ (T <sub>C</sub> = 125°C)	( <sub>CES</sub> , V <sub>EB</sub> = 0)	I <sub>CES</sub>	-	-	100 500	μAdc
Emitter Cutoff Current (V <sub>CE</sub> = 9 Vdc, I <sub>C</sub> = 0)		I <sub>EBO</sub>	-	-	100	μAdc
ON CHARACTERISTICS			•	•	•	
DC Current Gain $(I_C = 3 \text{ Adc}, V_{CE} = 10 \text{ Adc } V_{CE} = 10 \text{ Adc } V_{CE} = 10 \text{ Adc } V_{CE} = 10 \text{ Madc } V_{CE} = 10$	$(T_{C} = 125^{\circ}C)$ 2 Vdc) $(T_{C} = 125^{\circ}C)$ 2 Vdc) $(T_{C} = 125^{\circ}C)$	h <sub>FE</sub>	14 - 8 5 5.5 4	30 16 14 9 7 25	34 - - - - -	
Base-Emitter Saturation Voltage (I <sub>C</sub> = (I <sub>C</sub> =	10 Adc, I <sub>B</sub> = 2 Adc) 20 Adc, I <sub>B</sub> = 4 Adc)	V <sub>BE(sat)</sub>	-	0.97 1.15	1.25 1.5	Vdc
Collector-Emitter Saturation Voltage (I <sub>C</sub> = 10 Adc, I <sub>B</sub> = 2 Adc) (I <sub>C</sub> = 20 Adc, I <sub>B</sub> = 4 Adc)	V <sub>CE(sat)</sub>	- - - -	0.2 0.3 0.5 0.9	0.6 - 1.5 2.0	Vdc	
DYNAMIC CHARACTERISTICS						
Current Gain Bandwidth Product (I <sub>C</sub> = 1 Adc, V <sub>CE</sub> = 10 Vdc, f <sub>test</sub> = 1 MHz)		f <sub>T</sub>	-	13	_	MHz
Output Capacitance (V <sub>CB</sub> = 10 Vdc, I <sub>E</sub> = 0, f <sub>test</sub> = 1 MHz)		C <sub>ob</sub>	-	300	500	pF
Input Capacitance (V <sub>EB</sub> = 8.0)	C <sub>ib</sub>	-	7000	9000	pF	
SWITCHING CHARACTERISTICS: Re	sistive Load (D.C. = 10%, Pulse Width	= 70 μs)	1	1		
Turn-On Time	(I <sub>C</sub> = 10 Adc, I <sub>B1</sub> = I <sub>B2</sub> = 2 Adc,	t <sub>On</sub>	-	540	750	ns
Storage Time	Vcc = 125 V)	t <sub>s</sub>	_	4.75	6	μs
Fall Time		t <sub>f</sub>	_	380	500	ns
Turn-Off Time		t <sub>Off</sub>	_	5.2	6.5	μs
Turn-On Time	$(I_C = 20 \text{ Adc}, I_{B1} = I_{B2} = 4 \text{ Adc},$	t <sub>On</sub>	_	965	1200	ns
Storage Time	Vcc = 125 V)	t <sub>s</sub>	_	2.9	3.5	μs
Fall Time		t <sub>f</sub>	-	350	500	ns
Turn-Off Time		t <sub>Off</sub>	_	3.25	4	μs
SWITCHING CHARACTERISTICS: Inc	uctive Load (V <sub>clamp</sub> = 300 V, Vcc = 15	V, L = 200 μH)	•	•	•	
Fall Time	$(I_C = 10 \text{ Adc}, I_{B1} = I_{B2} = 2 \text{ Adc})$	t <sub>fi</sub>	_	142	250	ns
Storage Time		t <sub>si</sub>	_	4.75	6	μs
Crossover Time		t <sub>C</sub>	-	320	500	ns
Fall Time	(I <sub>C</sub> = 20 Adc, I <sub>B1</sub> = I <sub>B2</sub> = 4 Adc)	t <sub>fi</sub>	_	350	500	ns
Storage Time		t <sub>si</sub>	-	3.0	3.5	μs

### MJW18020

### **TYPICAL CHARACTERISTICS**

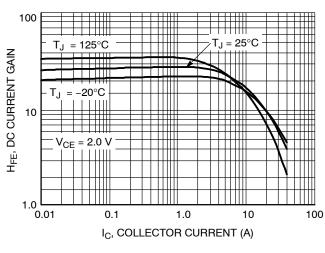


Figure 1. DC Current Gain, V<sub>CE</sub> = 2.0 V

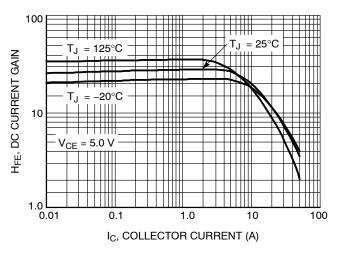


Figure 2. DC Current Gain, V<sub>CE</sub> = 5.0 V

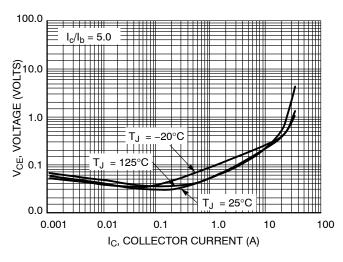


Figure 3. Typical Collector–Emitter Saturation Voltage,  $I_C/I_B = 5.0$ 

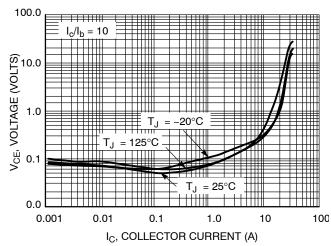


Figure 4. Typical Collector–Emitter Saturation Voltage,  $I_C/I_B = 10$ 

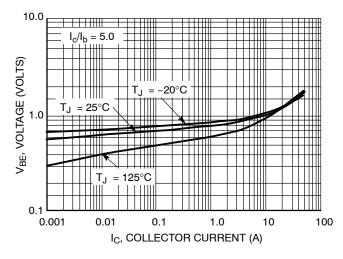


Figure 5. Typical Base–Emitter Saturation Voltage,  $I_C/I_B = 5.0$ 

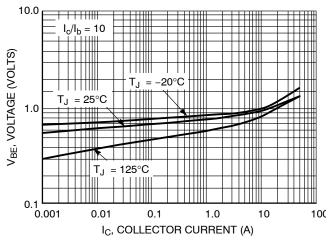


Figure 6. Typical Base–Emitter Saturation Voltage,  $I_C/I_B = 10$ 

### MJW18020

### **TYPICAL CHARACTERISTICS**

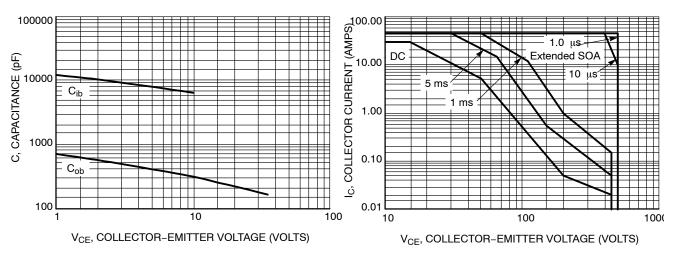


Figure 7. Typical Capacitance

Figure 8. Forward Bias Safe Operating Area


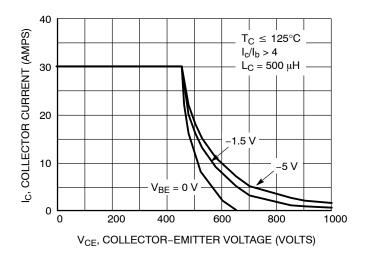


Figure 9. Reverse Bias Safe Operating Area





TO-247 CASE 340L ISSUE G

**DATE 06 OCT 2021** 


#### NOTES:

- DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1982.
- 2. CONTROLLING DIMENSION: MILLIMETER

	MILLIMETERS		INC	HES
DIM	MIN.	MAX.	MIN.	MAX.
Α	20.32	21.08	0.800	0.830
В	15.75	16.26	0.620	0.640
С	4.70	5.30	0.185	0.209
D	1.00	1.40	0.040	0.055
Ε	1.90	2.60	0.075	0.102
F	1.65	2.13	0.065	0.084
G	5.45	5.45 BSC		BSC
Н	1.50	2.49	0.059	0.098
J	0.40	0.80	0.016	0.031
К	19.81	20.83	0.780	0.820
L	5.40	6.20	0.212	0.244
N	4.32	5.49	0.170	0.216
Р		4.50		0.177
Q	3.55	3.65	0.140	0.144
U	6.15 BSC		0.242	BSC
W	2.87	3.12	0.113	0.123

	SCALE 1:1	
N N N N N N N N N N N N N N N N N N N	B	SEATING PLANE  T SEATING PLANE  H H
	(♣ 0.25 (0.010)@ Y A\$	

### **GENERIC MARKING DIAGRAM\***



STYLE 1: PIN 1. GATE 2. DRAIN 3. SOURCE 4. DRAIN

PIN 1. CATHODE 2. ANODE

3. GATE 4. ANODE

STYLE 5:

STYLE 2: PIN 1. ANODE 2. CATHODE (S) 3. ANODE 2 4. CATHODES (S)

PIN 1. MAIN TERMINAL 1 2. MAIN TERMINAL 2

3. GATE 4. MAIN TERMINAL 2

STYLE 6:

STYLE 3: PIN 1. BASE 2. COLLECTOR 3. EMITTER 4. COLLECTOR STYLE 4: PIN 1. GATE 2. COLLECTOR 3. EMITTER 4. COLLECTOR

XXXXX = Specific Device Code = Assembly Location Α

Υ = Year WW = Work Week G = Pb-Free Package

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "■", may or may not be present. Some products may not follow the Generic Marking.

DOCUMENT NUMBER:	98ASB15080C	Electronic versions are uncontrolled except when accessed directly from the Document Reposito Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.		
DESCRIPTION:	TO-247		PAGE 1 OF 1	

onsemi and ONSEMI. are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. **onsemi** makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

onsemi, Onsemi, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at <a href="www.onsemi.com/site/pdf/Patent-Marking.pdf">www.onsemi.com/site/pdf/Patent-Marking.pdf</a>. Onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA class 3 medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase

#### ADDITIONAL INFORMATION

**TECHNICAL PUBLICATIONS:** 

 $\textbf{Technical Library:} \ \underline{www.onsemi.com/design/resources/technical-documentation}$ 

onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at

www.onsemi.com/support/sales