

# NCP59300, NCV59300 Series

## 3.0 A, Very Low-Dropout (VLDO) Fast Transient Response Regulator series

The NCP59300 series are high precision, very low dropout (VLDO), low ground current positive voltage regulators that are capable of providing an output current in excess of 3.0 A with a typical dropout voltage lower than 300 mV at 3.0 A load current. The devices are stable with ceramic output capacitors. This series consists of fixed voltage versions.

The NCP59300 series can withstand up to 18 V max input voltage.

Internal protection features consist of output current limiting, built-in thermal shutdown and reverse output current protection. Logic level enable and error flag pins are available on the 5-pin version.

The NCP59300 series fixed voltage devices are available in D2PAK-5 package, with devices in D2PAK-3 package planned in the future.

### Features

- Output Current in Excess of 3.0 A
- 300 mV Typical Dropout Voltage at 3.0 A
- Fixed Output Voltage Options
- Low Ground Current
- Fast Transient Response
- Stable with Ceramic Output Capacitor
- Logic Compatible Enable and Error Flag Pins
- Current Limit, Reverse Current and Thermal Shutdown Protection
- Operation up to 13.5 V Input Voltage
- NCV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q100 Qualified and PPAP Capable
- These are Pb-Free Devices


### Applications

- Consumer and Industrial Equipment Point of Regulation
- Servers and Networking Equipment
- FPGA, DSP and Logic Power supplies
- Switching Power Supply Post Regulation
- Battery Chargers
- Functional Replacement for Industry Standard MIC29300, MIC39300, MIC37300 Fixed Voltage Devices




ON Semiconductor®

<http://onsemi.com>




D<sup>2</sup>PAK 5  
CASE 936A




D<sup>2</sup>PAK  
CASE 936

### MARKING DIAGRAMS

D<sup>2</sup>PAK



D<sup>2</sup>PAK3



|    |                     |
|----|---------------------|
| xx | = Voltage Version   |
| y  | = P (NCP), V (NCV)  |
| A  | = Assembly Location |
| WL | = Wafer Lot         |
| Y  | = Year              |
| WW | = Work Week         |
| G  | = Pb-Free Package   |

### ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 8 of this data sheet.

# NCP59300, NCV59300 Series

## TYPICAL APPLICATIONS

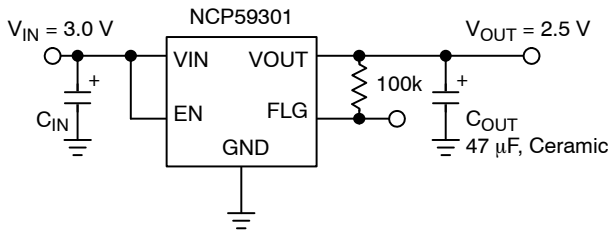


Figure 1. Fixed 2.5 V Regulator with Error Flag

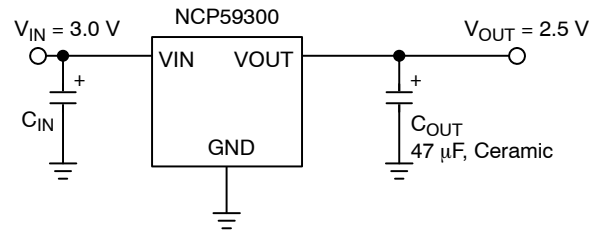


Figure 2. Fixed 2.5 V Regulator in D<sup>2</sup>PAK-3 Package

## PIN FUNCTION DESCRIPTION

| Pin Number<br>D2PAK-5 | Pin Number<br>D2PAK-3 | Pin Name | Pin Function                                                                                |
|-----------------------|-----------------------|----------|---------------------------------------------------------------------------------------------|
| 1                     | –                     | EN       | Enable Input: CMOS and TTL logic compatible. Logic high = enable; Logic low = shutdown.     |
| 2                     | 1                     | VIN      | Input voltage which supplies both the internal circuitry and the current to the output load |
| 3                     | 2                     | GND      | Ground                                                                                      |
| TAB                   | TAB                   | TAB      | TAB is connected to ground.                                                                 |
| 4                     | 3                     | VOUT     | Linear Regulator Output.                                                                    |
| 5                     | –                     | FLG      | Error Flag Open collector output. Active-low indicates an output fault condition.           |

## ABSOLUTE MAXIMUM RATINGS

| Symbol                             | Rating                                                                                               | Value                             | Unit        |
|------------------------------------|------------------------------------------------------------------------------------------------------|-----------------------------------|-------------|
| V <sub>IN</sub>                    | Supply Voltage                                                                                       | 0 to 18                           | V           |
| V <sub>EN</sub>                    | Enable Input Voltage                                                                                 | 0 to 18                           | V           |
| V <sub>FLG</sub>                   | Error Flag Open Collector Output Maximum Voltage                                                     | 0 to 18                           | V           |
| V <sub>OUT</sub> – V <sub>IN</sub> | Reverse V <sub>OUT</sub> – V <sub>IN</sub> Voltage (EN = Shutdown or V <sub>IN</sub> = 0 V) (Note 1) | 0 to 6.5                          | V           |
| P <sub>D</sub>                     | Power Dissipation (Notes 2 and 3)                                                                    | Internally Limited                |             |
| T <sub>J</sub>                     | Junction Temperature                                                                                 | –40 ≤ T <sub>J</sub> ≤ +125       | °C          |
| T <sub>S</sub>                     | Storage Temperature                                                                                  | –65 ≤ T <sub>J</sub> ≤ +150       | °C          |
|                                    | ESD Rating (Notes 4 and 5)                                                                           | Human Body Model<br>Machine Model | 2000<br>200 |

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

NOTE: All voltages are referenced to GND pin unless otherwise noted.

- The ENABLE pin input voltage must be ≤ 0.8 V or V<sub>IN</sub> must be connected to ground potential.
- $P_{D(max)} = (T_{J(max)} - T_A) / R_{\theta JA}$ , where  $R_{\theta JA}$  depends upon the printed circuit board layout.
- This protection is not guaranteed outside the Recommended Operating Conditions.
- Devices are ESD sensitive. Handling precautions recommended.
- This device series incorporates ESD protection and is tested by the following methods:  
ESD Human Body Model (HBM) tested per AEC – Q100 – 002 (EIA/JESD22 – A114C)  
ESD Machine Model (MM) tested per AEC – Q100 – 003 (EIA/JESD22 – A115C)  
This device contains latch – up protection and exceeds 100 mA per JEDEC Standard JESD78.

# NCP59300, NCV59300 Series

## RECOMMENDED OPERATING CONDITIONS (Note 6)

| Symbol           | Rating                            | Value                       | Unit |
|------------------|-----------------------------------|-----------------------------|------|
| V <sub>IN</sub>  | Supply Voltage                    | 2.24 to 13.5                | V    |
| V <sub>EN</sub>  | Enable Input Voltage              | 0 to 13.5                   | V    |
| V <sub>FLG</sub> | Error Flag Open Collector Voltage | 0 to 13.5                   | V    |
| T <sub>J</sub>   | Junction Temperature              | -40 ≤ T <sub>J</sub> ≤ +125 | °C   |

6. The device is not guaranteed to function outside it's Recommended operating conditions.

## ELECTRICAL CHARACTERISTICS

(T<sub>J</sub> = 25°C with V<sub>IN</sub> = V<sub>OUT nominal</sub> + 1 V; V<sub>EN</sub> = V<sub>IN</sub>; I<sub>L</sub> = 10 mA; bold values indicate -40°C < T<sub>J</sub> < +125°C, unless noted.)

| Parameter                                                   | Conditions                                                                                      | Min         | Typ  | Max              | Unit |
|-------------------------------------------------------------|-------------------------------------------------------------------------------------------------|-------------|------|------------------|------|
| Output Voltage Accuracy                                     | I <sub>L</sub> = 10 mA                                                                          | -1.5        |      | +1.5             | %    |
|                                                             | 10 mA < I <sub>OUT</sub> < 3 A, V <sub>OUT nominal</sub> + 1 ≤ V <sub>IN</sub> ≤ 13.5 V         | <b>-2.5</b> |      | <b>+2.5</b>      | %    |
| Output Voltage Line Regulation                              | V <sub>IN</sub> = V <sub>OUT nominal</sub> + 1.0 V to 13.5 V; I <sub>L</sub> = 10 mA            |             | 0.02 | 0.5              | %    |
| Output Voltage Load Regulation                              | I <sub>L</sub> = 10 mA to 3 A                                                                   |             | 0.2  | <b>1</b>         | %    |
| V <sub>IN</sub> - V <sub>OUT</sub> Dropout Voltage (Note 7) | I <sub>L</sub> = 1.5 A                                                                          |             | 175  | <b>350</b>       | mV   |
|                                                             | I <sub>L</sub> = 3 A                                                                            |             | 300  | <b>500</b>       | mV   |
| Ground Pin Current (Note 8)                                 | I <sub>L</sub> = 3 A                                                                            |             | 60   | 90<br><b>120</b> | mA   |
| Ground Pin Current in Shutdown                              | V <sub>EN</sub> ≤ 0.5 V                                                                         |             | 1.0  | 5                | μA   |
| Overload Protection Current Limit                           | V <sub>OUT</sub> = 0 V                                                                          |             | 3.5  | <b>5</b>         | A    |
| Output Voltage Start-up Slope                               | V <sub>EN</sub> = V <sub>IN</sub> , I <sub>OUT</sub> = 10 mA, C <sub>OUT</sub> = 47 μF (Note 9) |             | 40   | 200              | μs/V |

## ENABLE INPUT

|                            |                                                    |            |    |                 |    |
|----------------------------|----------------------------------------------------|------------|----|-----------------|----|
| Enable Input Signal Levels | Regulator enable                                   | <b>1.8</b> |    |                 | V  |
|                            | Regulator shutdown                                 |            |    | <b>0.8</b>      | V  |
| Enable pin Input Current   | V <sub>EN</sub> ≤ 0.8 V (Regulator shutdown)       |            |    | 2<br><b>4</b>   | μA |
|                            | 6.5 V > V <sub>EN</sub> ≥ 1.8 V (Regulator enable) | 1          | 15 | 30<br><b>40</b> | μA |

## FLAG OUTPUT

|                        |                                                     |    |     |                   |    |
|------------------------|-----------------------------------------------------|----|-----|-------------------|----|
| I <sub>flg(leak)</sub> | V <sub>oh</sub> = 6 V                               |    |     | 1<br><b>2</b>     | μA |
| V <sub>FLG(LO)</sub>   | V <sub>IN</sub> = 2.24 V, I <sub>FLG</sub> = 250 μA |    | 210 | 400<br><b>500</b> | mV |
| V <sub>FLG</sub>       | Low Threshold, % of V <sub>OUT</sub>                | 93 | 95  |                   | %  |
|                        | Hysteresis                                          |    | 2   |                   | %  |
|                        | High Threshold, % of V <sub>OUT</sub>               |    | 97  | 99.2              | %  |

7. V<sub>DO</sub> = V<sub>IN</sub> - V<sub>OUT</sub> when V<sub>OUT</sub> decreases to 98% of its nominal output voltage with V<sub>IN</sub> = V<sub>OUT</sub> + 1 V. For output voltages below 1.74 V, dropout voltage specification does not apply due to a minimum input operating voltage of 2.24 V.

8. I<sub>IN</sub> = I<sub>GND</sub> + I<sub>OUT</sub>.

9. Fixed Voltage Device Start-up Time = Output Voltage Start-up Slope x V<sub>OUT</sub> Nominal.

| Package                   | Conditions / PCB Footprint                                     | Thermal Resistance         |
|---------------------------|----------------------------------------------------------------|----------------------------|
| D2PAK-3, Junction-to-Case |                                                                | R <sub>θJC</sub> = 2.1°C/W |
| D2PAK-5, Junction-to-Case |                                                                | R <sub>θJC</sub> = 2.1°C/W |
| D2PAK-3, Junction-to-Air  | PCB with 100 mm <sup>2</sup> 2.0 oz Copper Heat Spreading Area | R <sub>θJA</sub> = 52°C/W  |
| D2PAK-5, Junction-to-Air  | PCB with 100 mm <sup>2</sup> 2.0 oz Copper Heat Spreading Area | R <sub>θJA</sub> = 52°C/W  |

# NCP59300, NCV59300 Series

## TYPICAL CHARACTERISTICS

$T_J = 25^\circ\text{C}$  if not otherwise noted

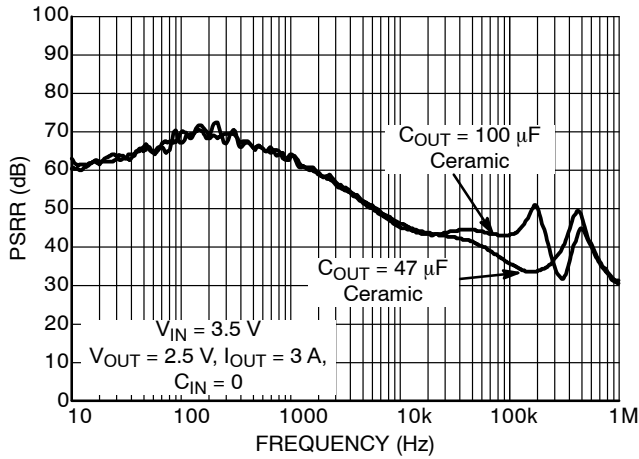


Figure 3. Power Supply Rejection Ratio

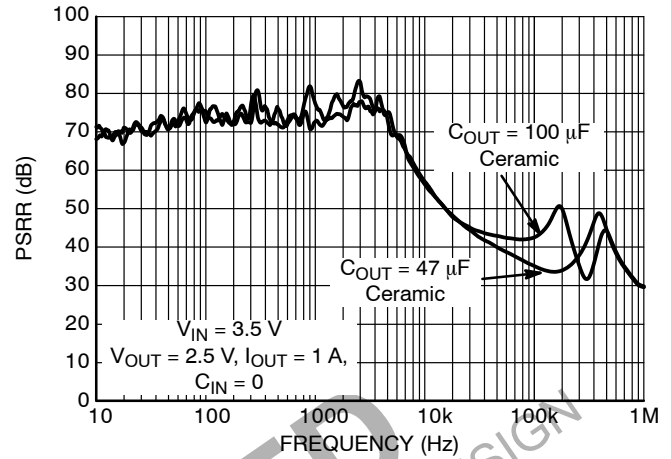


Figure 4. Power Supply Rejection Ratio

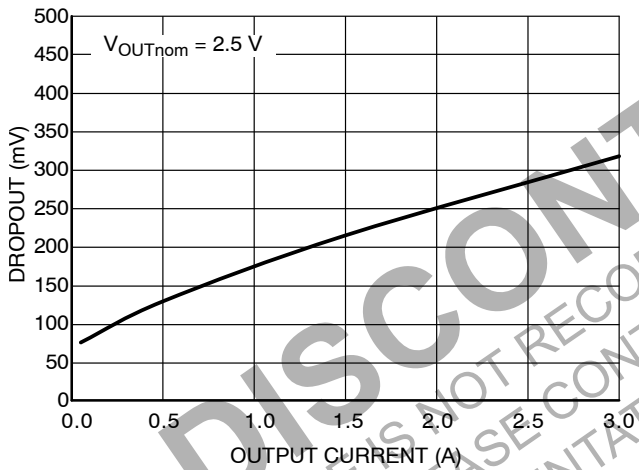


Figure 5. Dropout Voltage vs. Output Current

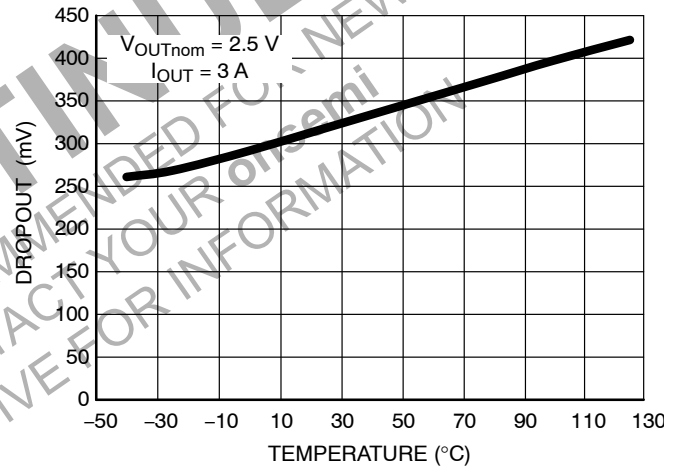


Figure 6. Dropout Voltage vs. Temperature

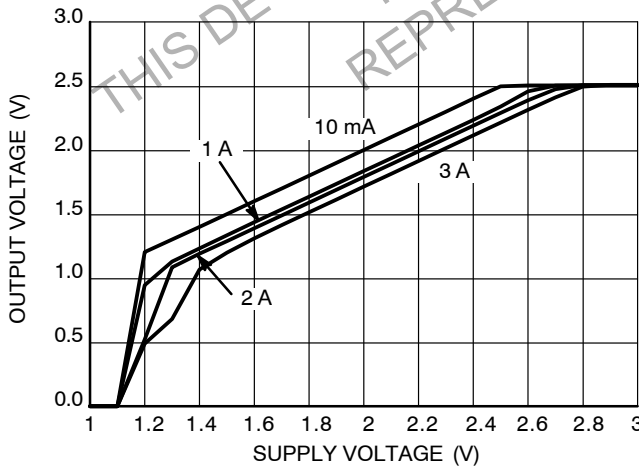


Figure 7. Dropout Characteristics (2.5 V)

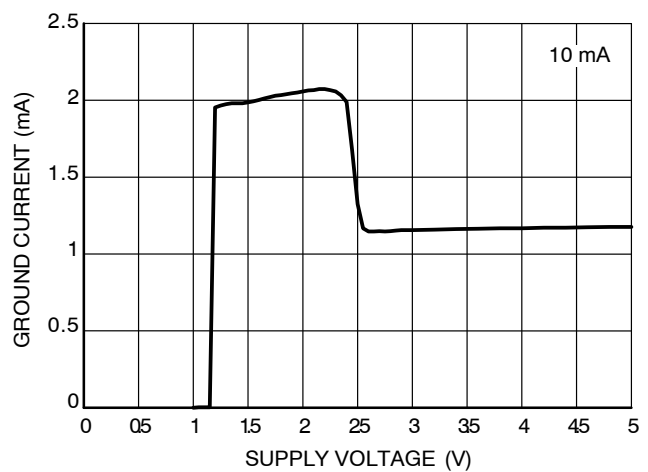


Figure 8. Ground Current vs. Supply Voltage (2.5 V)

# NCP59300, NCV59300 Series

## TYPICAL CHARACTERISTICS

$T_J = 25^\circ\text{C}$  if not otherwise noted

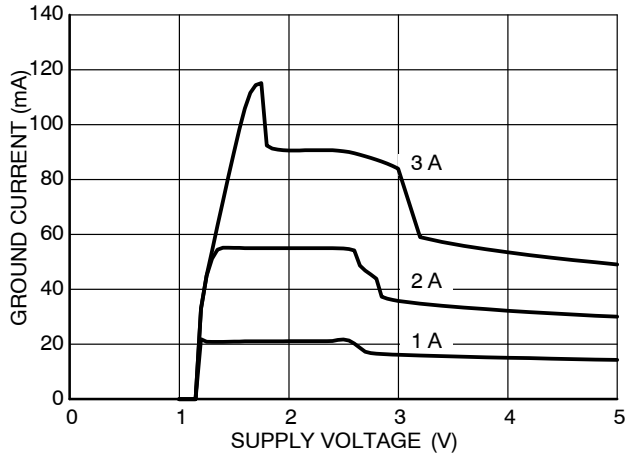


Figure 9. Ground Current vs. Supply Voltage (2.5 V)

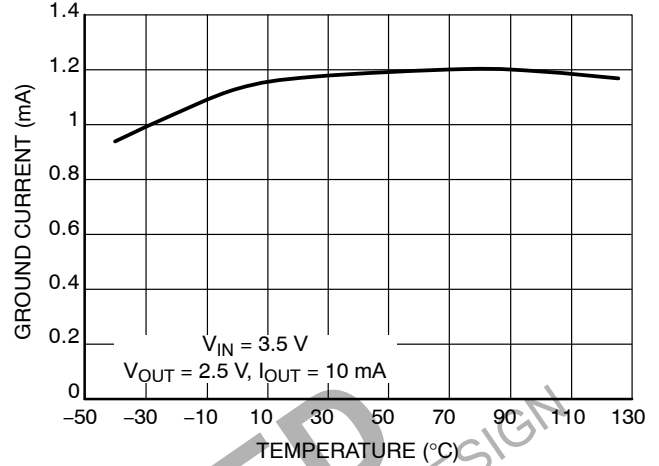


Figure 10. Ground Current vs. Temperature

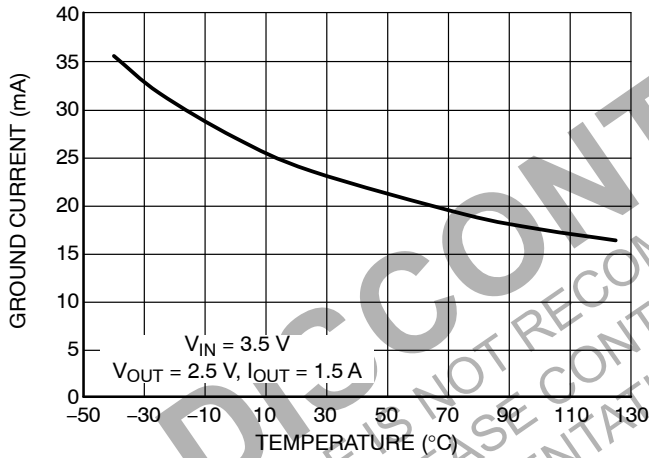


Figure 11. Ground Current vs. Temperature

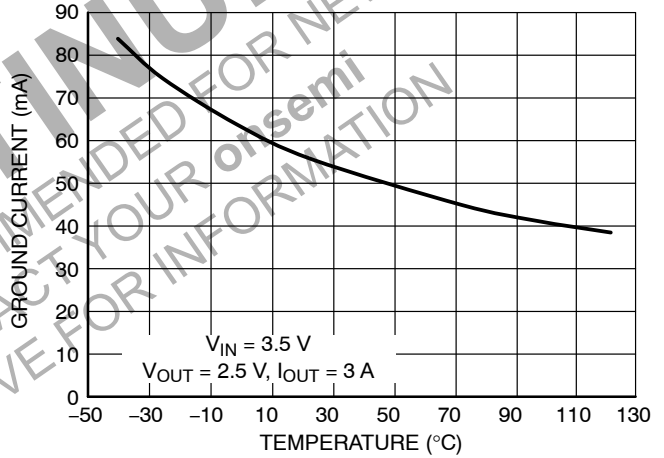


Figure 12. Ground Current vs. Temperature

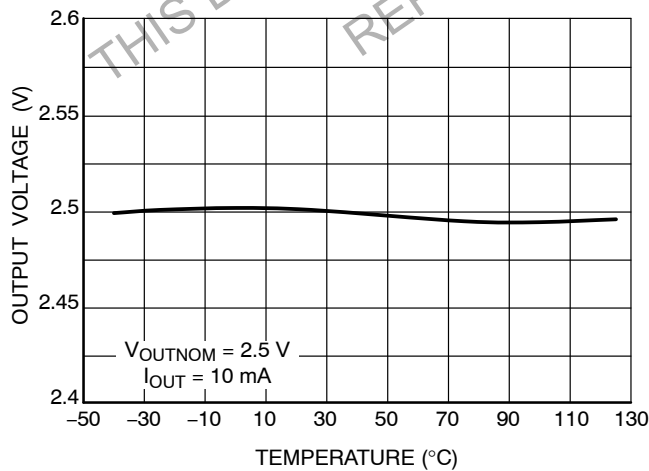


Figure 13. Output Voltage vs. Temperature

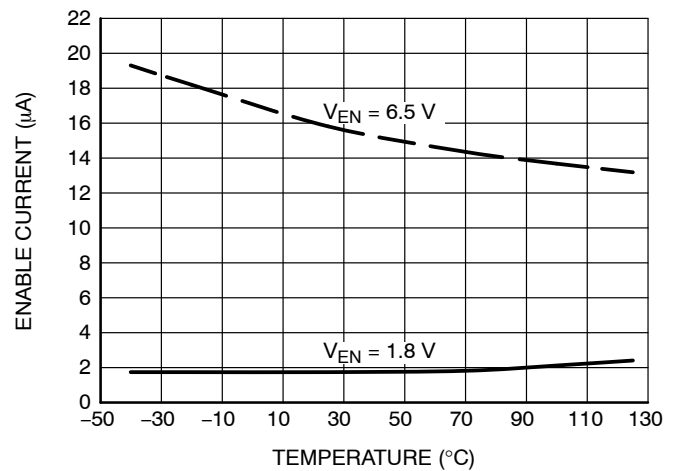


Figure 14. Enable Pin Input Current vs. Temperature

## NCP59300, NCV59300 Series

### FUNCTIONAL CHARACTERISTICS

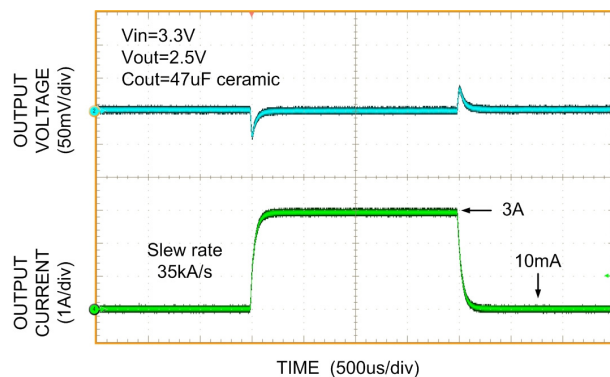


Figure 15. Load Transient Response

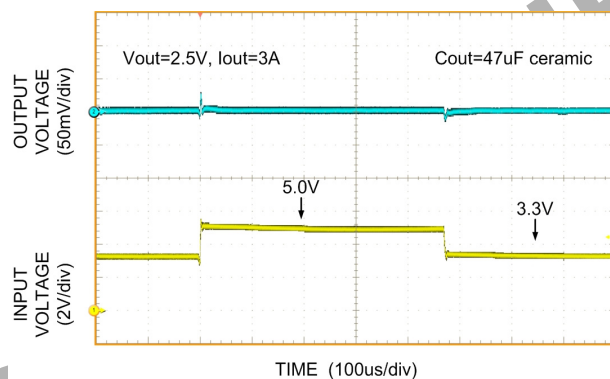


Figure 16. Line Transient Response

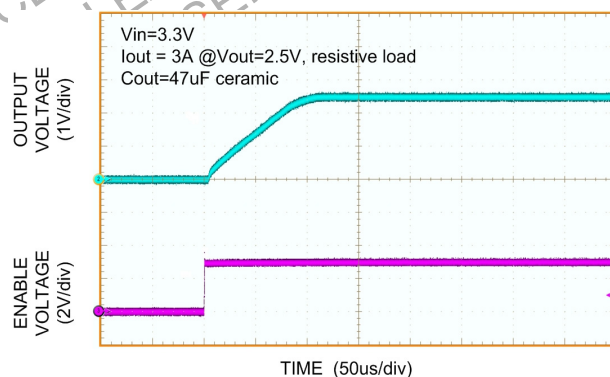


Figure 17. Enable Transient Response

## APPLICATIONS INFORMATION

### Output Capacitor and Stability

The NCP59300 series requires an output capacitor for stable operation. The NCP59300 series is designed to operate with ceramic output capacitors. The recommended output capacitance value is 47  $\mu\text{F}$  or greater. Such capacitors help to improve transient response and noise reduction at high frequency.

### Input Capacitor

An input capacitor of 1.0  $\mu\text{F}$  or greater is recommended when the device is more than 4 inches away from the bulk supply capacitance, or when the supply is a battery. Small, surface-mount chip capacitors can be used for the bypassing. The capacitor should be placed within 1 inch of the device for optimal performance. Larger values will help to improve ripple rejection by bypassing the input of the regulator, further improving the integrity of the output voltage.

### Minimum Load Current

The NCP59300 regulator is specified between finite loads. A 10 mA minimum load current is necessary for proper operation.

### Error Flag

Some NCP59300 series members feature an error flag circuit that monitors the output voltage and signals an error condition when the voltage is 5% below the nominal output voltage. The error flag is an open-collector output that can sink up to 5 mA typically during a  $V_{\text{OUT}}$  fault condition.

The FLG output is overload protected when a short circuit of the pullup load resistor occurs in the application. This is guaranteed in the full range of FLG output voltage. Max ratings (see Max Ratings table). Please be aware operation in this mode is not recommended, power dissipated in the device can impact on output voltage precision and other device characteristics.

### Enable Input

Some NCP59300 series members also feature an enable input for on/off control of the device. Its shutdown state draws “zero” current from input voltage supply (only microamperes of leakage). The enable input is TTL/CMOS compatible for simple logic interface, but can be connected up to  $V_{\text{IN}}$ .

### Overcurrent and Reverse Output Current Protection

The NCP59300 regulator is fully protected from damage due to output current overload conditions. When NCP59300 output is overloaded, Output Current limiting is provided. This limiting is linear; output current during overload conditions is constant. These features are advantageous for powering FPGAs and other ICs having current consumption higher than nominal during their startup.

Thermal shutdown disables the NCP59300 device when the die temperature exceeds the maximum safe operating temperature.

When NCP59300 is disabled and ( $V_{\text{OUT}} - V_{\text{IN}}$ ) voltage difference is less than 6.5 V in the application, the output structure of these regulators is able to withstand output voltage (backup battery as example) to be applied without reverse current flow. Of course the additional current flowing through the Feedback resistor divider inside the NCP59300 Fixed voltage devices (30  $\mu\text{A}$  typically at nominal output voltage) needs to be included in the backup battery discharging calculations.

### Thermal Considerations

The power handling capability of the device is limited by the maximum rated junction temperature (125°C). The  $P_{\text{D}}$  total power dissipated by the device has two components, Input to output voltage differential multiplied by Output current and Input voltage multiplied by GND pin current.

$$P_{\text{D}} = (V_{\text{IN}} - V_{\text{OUT}}) \cdot I_{\text{OUT}} + V_{\text{IN}} \cdot I_{\text{GND}} \quad (\text{eq. 1})$$

The GND pin current value can be found in Electrical Characteristics table and in Typical Characteristics graphs.

The Junction temperature  $T_{\text{J}}$  is

$$T_{\text{J}} = T_{\text{A}} + P_{\text{D}} \cdot R_{\theta\text{JA}} \quad (\text{eq. 2})$$

where  $T_{\text{A}}$  is ambient temperature and  $R_{\theta\text{JA}}$  is the Junction to Ambient Thermal Resistance of the NCP/NCV59300 device mounted on the specific PCB.

To maximize efficiency of the application and minimize thermal power dissipation of the device it is convenient to use the Input to output voltage differential as low as possible.

The static typical dropout characteristics for various output voltage and output current can be found in the Typical Characteristics graphs.


## NCP59300, NCV59300 Series

### ORDERING INFORMATION

| Device           | Output Current | Output Voltage | Junction Temp. Range | Package           | Shipping <sup>†</sup>                     |
|------------------|----------------|----------------|----------------------|-------------------|-------------------------------------------|
| NCP59300DS18R4G  | 3.0 A          | 1.8 V          | -40°C to +125°C      | D2PAK-3 (Pb-Free) | Under Development<br>Contact Sales Office |
| NCP59300DS25R4G  | 3.0 A          | 2.5 V          | -40°C to +125°C      | D2PAK-3 (Pb-Free) | Under Development<br>Contact Sales Office |
| NCP59300DS28R4G  | 3.0 A          | 2.8 V          | -40°C to +125°C      | D2PAK-3 (Pb-Free) | Under Development<br>Contact Sales Office |
| NCP59300DS30R4G  | 3.0 A          | 3.0 V          | -40°C to +125°C      | D2PAK-3 (Pb-Free) | Under Development<br>Contact Sales Office |
| NCP59300DS33R4G  | 3.0 A          | 3.3 V          | -40°C to +125°C      | D2PAK-3 (Pb-Free) | Under Development<br>Contact Sales Office |
| NCP59300DS50R4G  | 3.0 A          | 5.0 V          | -40°C to +125°C      | D2PAK-3 (Pb-Free) | Under Development<br>Contact Sales Office |
| NCV59300DS18R4G* | 3.0 A          | 1.8 V          | -40°C to +125°C      | D2PAK-3 (Pb-Free) | Under Development<br>Contact Sales Office |
| NCV59300DS25R4G* | 3.0 A          | 2.5 V          | -40°C to +125°C      | D2PAK-3 (Pb-Free) | Under Development<br>Contact Sales Office |
| NCV59300DS28R4G* | 3.0 A          | 2.8 V          | -40°C to +125°C      | D2PAK-3 (Pb-Free) | Under Development<br>Contact Sales Office |
| NCV59300DS30R4G* | 3.0 A          | 3.0 V          | -40°C to +125°C      | D2PAK-3 (Pb-Free) | Under Development<br>Contact Sales Office |
| NCV59300DS33R4G* | 3.0 A          | 3.3 V          | -40°C to +125°C      | D2PAK-3 (Pb-Free) | Under Development<br>Contact Sales Office |
| NCV59300DS50R4G* | 3.0 A          | 5.0 V          | -40°C to +125°C      | D2PAK-3 (Pb-Free) | Under Development<br>Contact Sales Office |
| NCP59301DS18R4G  | 3.0 A          | 1.8 V          | -40°C to +125°C      | D2PAK-5 (Pb-Free) | 800 / Tape & Reel                         |
| NCP59301DS25R4G  | 3.0 A          | 2.5 V          | -40°C to +125°C      | D2PAK-5 (Pb-Free) | 800 / Tape & Reel                         |
| NCP59301DS28R4G  | 3.0 A          | 2.8 V          | -40°C to +125°C      | D2PAK-5 (Pb-Free) | 800 / Tape & Reel                         |
| NCP59301DS30R4G  | 3.0 A          | 3.0 V          | -40°C to +125°C      | D2PAK-5 (Pb-Free) | 800 / Tape & Reel                         |
| NCP59301DS33R4G  | 3.0 A          | 3.3 V          | -40°C to +125°C      | D2PAK-5 (Pb-Free) | 800 / Tape & Reel                         |
| NCP59301DS50R4G  | 3.0 A          | 5.0 V          | -40°C to +125°C      | D2PAK-5 (Pb-Free) | 800 / Tape & Reel                         |
| NCV59301DS18R4G* | 3.0 A          | 1.8 V          | -40°C to +125°C      | D2PAK-5 (Pb-Free) | 800 / Tape & Reel                         |
| NCV59301DS25R4G* | 3.0 A          | 2.5 V          | -40°C to +125°C      | D2PAK-5 (Pb-Free) | 800 / Tape & Reel                         |
| NCV59301DS28R4G* | 3.0 A          | 2.8 V          | -40°C to +125°C      | D2PAK-5 (Pb-Free) | 800 / Tape & Reel                         |
| NCV59301DS30R4G* | 3.0 A          | 3.0 V          | -40°C to +125°C      | D2PAK-5 (Pb-Free) | 800 / Tape & Reel                         |
| NCV59301DS33R4G* | 3.0 A          | 3.3 V          | -40°C to +125°C      | D2PAK-5 (Pb-Free) | 800 / Tape & Reel                         |
| NCV59301DS50R4G* | 3.0 A          | 5.0 V          | -40°C to +125°C      | D2PAK-5 (Pb-Free) | 800 / Tape & Reel                         |

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.







\*NCV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q100 Qualified and PPAP Capable.



SCALE 1:1

**D<sup>2</sup>PAK 5-LEAD**  
**CASE 936A-02**  
**ISSUE E**


DATE 28 JUL 2021

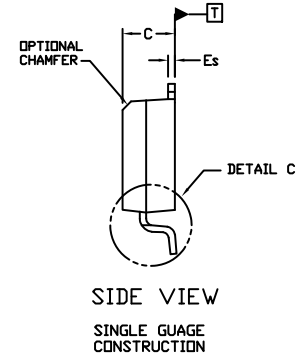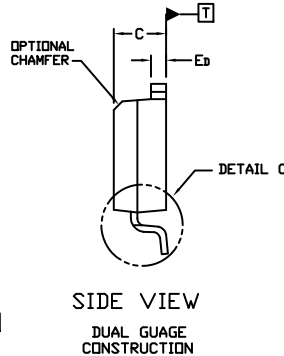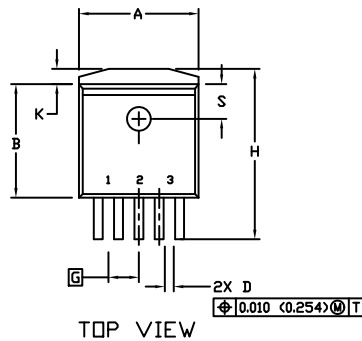

## NOTES:


- DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
- CONTROLLING DIMENSION: INCHES
- TAB CONTOUR OPTIONAL WITHIN DIMENSIONS A AND K.
- DIMENSIONS U AND V ESTABLISH A MINIMUM MOUNTING SURFACE FOR TERMINAL 4.
- DIMENSIONS A AND B DO NOT INCLUDE MOLD FLASH OR GATE PROTRUSIONS. MOLD FLASH AND GATE PROTRUSIONS NOT TO EXCEED 0.025 (0.635) MAXIMUM.

| DIM | INCHES |       | MILLIMETERS |        |
|-----|--------|-------|-------------|--------|
|     | MIN.   | MAX.  | MIN.        | MAX.   |
| A   | 0.396  | 0.403 | 9.804       | 10.236 |
| B   | 0.356  | 0.368 | 9.042       | 9.347  |
| C   | 0.170  | 0.180 | 4.318       | 4.572  |
| D   | 0.026  | 0.036 | 0.660       | 0.914  |
| Ed  | 0.045  | 0.055 | 1.143       | 1.397  |
| Es  | 0.018  | 0.026 | 0.457       | 0.660  |
| G   | 0.067  | BSC   | 1.702       | BSC    |
| H   | 0.539  | 0.579 | 13.691      | 14.707 |
| K   | 0.050  | REF   | 1.270       | REF    |
| L   | 0.000  | 0.010 | 0.000       | 0.254  |
| M   | 0.088  | 0.102 | 2.235       | 2.591  |
| N   | 0.018  | 0.026 | 0.457       | 0.660  |
| P   | 0.058  | 0.078 | 1.473       | 1.981  |
| R   | 0°     | 8°    | 0°          | 8°     |
| S   | 0.116  | REF   | 2.946       | REF    |
| U   | 0.200  | MIN   | 5.080       | MIN    |
| V   | 0.250  | MIN   | 6.350       | MIN    |

**GENERIC  
MARKING DIAGRAM\***


xxxxxx = Device Code  
A = Assembly Location  
WL = Wafer Lot  
Y = Year  
WW = Work Week  
G = Pb-Free Package

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "•", may or may not be present. Some products may not follow the Generic Marking.


**RECOMMENDED  
MOUNTING FOOTPRINT \***

\* For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

**DOCUMENT NUMBER:** 98ASH01006A

Electronic versions are uncontrolled except when accessed directly from the Document Repository.  
Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.

**DESCRIPTION:** D2PAK 5-LEAD

**PAGE 1 OF 1**

onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

**onsemi**, **Onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## ADDITIONAL INFORMATION

### TECHNICAL PUBLICATIONS:

Technical Library: [www.onsemi.com/design/resources/technical-documentation](http://www.onsemi.com/design/resources/technical-documentation)  
onsemi Website: [www.onsemi.com](http://www.onsemi.com)

### ONLINE SUPPORT: [www.onsemi.com/support](http://www.onsemi.com/support)

For additional information, please contact your local Sales Representative at  
[www.onsemi.com/support/sales](http://www.onsemi.com/support/sales)