

# NGTG25N120FL2WG

## IGBT - Field Stop II

This Insulated Gate Bipolar Transistor (IGBT) features a robust and cost effective Field Stop II Trench construction, and provides superior performance in demanding switching applications, offering both low on state voltage and minimal switching loss. The IGBT is well suited for UPS and solar applications.

### Features

- Extremely Efficient Trench with Field Stop Technology
- $T_{Jmax} = 175^{\circ}C$
- Optimized for High Speed Switching
- 10  $\mu s$  Short Circuit Capability
- These are Pb-Free Devices

### Typical Applications

- Solar Inverter
- Uninterruptible Power Inverter Supplies (UPS)
- Welding

### ABSOLUTE MAXIMUM RATINGS

| Rating  | Symbol    | Value                | Unit        |
|---|-----------|----------------------|-------------|
| Collector-emitter voltage   | $V_{CES}$ | 1200                 | V           |
| Collector current<br>@ $T_C = 25^{\circ}C$<br>@ $T_C = 100^{\circ}C$                          | $I_C$     | 50<br>25             | A           |
| Pulsed collector current, $T_{pulse}$<br>limited by $T_{Jmax}$                                | $I_{CM}$  | 100                  | A           |
| Gate-emitter voltage<br>Transient gate-emitter voltage<br>( $T_{pulse} = 5 \mu s, D < 0.10$ ) | $V_{GE}$  | $\pm 20$<br>$\pm 30$ | V           |
| Power Dissipation<br>@ $T_C = 25^{\circ}C$<br>@ $T_C = 100^{\circ}C$                          | $P_D$     | 385<br>192           | W           |
| Short Circuit Withstand Time<br>$V_{GE} = 15 V, V_{CE} = 500 V, T_J \leq 150^{\circ}C$        | $T_{SC}$  | 10                   | $\mu s$     |
| Operating junction temperature range  | $T_J$     | -55 to +175          | $^{\circ}C$ |
| Storage temperature range   | $T_{stg}$ | -55 to +175          | $^{\circ}C$ |
| Lead temperature for soldering, 1/8"<br>from case for 5 seconds                               | $T_{SLD}$ | 260                  | $^{\circ}C$ |



Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.



**ON Semiconductor**<sup>®</sup>

<http://onsemi.com>

**25 A, 1200 V**  
 **$V_{CESat} = 2.0 V$**   
 **$E_{off} = 0.60 mJ$**

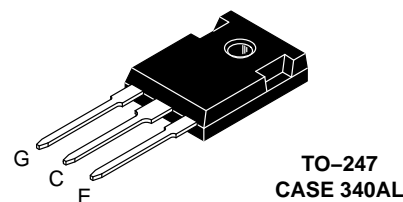

### MARKING DIAGRAM



A = Assembly Location  
Y = Year  
WW = Work Week  
G = Pb-Free Package

### ORDERING INFORMATION

| Device          | Package             | Shipping        |
|-----------------|---------------------|-----------------|
| NGTG25N120FL2WG | TO-247<br>(Pb-Free) | 30 Units / Rail |

# NGTG25N120FL2WG

## THERMAL CHARACTERISTICS

| Rating  | Symbol          | Value | Unit                        |
|---|-----------------|-------|-----------------------------|
| Thermal resistance junction-to-case, for IGBT | $R_{\theta JC}$ | 0.39  | $^{\circ}\text{C}/\text{W}$ |
| Thermal resistance junction-to-ambient        | $R_{\theta JA}$ | 40    | $^{\circ}\text{C}/\text{W}$ |

## ELECTRICAL CHARACTERISTICS ( $T_J = 25^{\circ}\text{C}$ unless otherwise specified)

| Parameter | Test Conditions | Symbol | Min | Typ | Max | Unit |
|-----------|-----------------|--------|-----|-----|-----|------|
|-----------|-----------------|--------|-----|-----|-----|------|

### STATIC CHARACTERISTIC

|   |   |               |      |              |           |    |
|---|---|---------------|------|--------------|-----------|----|
| Collector-emitter breakdown voltage, gate-emitter short-circuited | $V_{GE} = 0\text{ V}, I_C = 500\ \mu\text{A}$   | $V_{(BR)CES}$ | 1200 | -            | -         | V  |
| Collector-emitter saturation voltage                              | $V_{GE} = 15\text{ V}, I_C = 25\text{ A}$<br>$V_{GE} = 15\text{ V}, I_C = 25\text{ A}, T_J = 175^{\circ}\text{C}$         | $V_{CEsat}$   | -    | 2.00<br>2.40 | 2.40<br>- | V  |
| Gate-emitter threshold voltage                                    | $V_{GE} = V_{CE}, I_C = 400\ \mu\text{A}$   | $V_{GE(th)}$  | 4.5  | 5.5          | 6.5       | V  |
| Collector-emitter cut-off current, gate-emitter short-circuited   | $V_{GE} = 0\text{ V}, V_{CE} = 1200\text{ V}$<br>$V_{GE} = 0\text{ V}, V_{CE} = 1200\text{ V}, T_J = 175^{\circ}\text{C}$ | $I_{CES}$     | -    | -            | 0.4<br>2  | mA |
| Gate leakage current, collector-emitter short-circuited           | $V_{GE} = 20\text{ V}, V_{CE} = 0\text{ V}$   | $I_{GES}$     | -    | -            | 200       | nA |

|                              |  |           |   |      |   |    |
|------------------------------|--|-----------|---|------|---|----|
| Input capacitance            | $V_{CE} = 20\text{ V}, V_{GE} = 0\text{ V}, f = 1\text{ MHz}$    | $C_{ies}$ | - | 4420 | - | pF |
| Output capacitance           |  | $C_{oes}$ | - | 151  | - |    |
| Reverse transfer capacitance |  | $C_{res}$ | - | 81   | - |    |
| Gate charge total            | $V_{CE} = 600\text{ V}, I_C = 25\text{ A}, V_{GE} = 15\text{ V}$ | $Q_g$     | - | 178  | - | nC |
| Gate to emitter charge       |  | $Q_{ge}$  | - | 39   | - |    |
| Gate to collector charge     |  | $Q_{gc}$  | - | 83   | - |    |

### SWITCHING CHARACTERISTIC, INDUCTIVE LOAD

|                         |   |              |       |      |     |    |    |
|-------------------------|---|--------------|-------|------|-----|----|----|
| Turn-on delay time      | $T_J = 25^{\circ}\text{C}$<br>$V_{CC} = 600\text{ V}, I_C = 25\text{ A}$<br>$R_g = 10\ \Omega$<br>$V_{GE} = 0\text{ V}/15\text{V}^*$  | $t_{d(on)}$  | -     | 87   | -   | ns |    |
| Rise time               |   | $t_r$        | -     | 74   | -   |    |    |
| Turn-off delay time     |   | $t_{d(off)}$ | -     | 179  | -   |    |    |
| Fall time               |   |              | $t_f$ | -    | 136 | -  | mJ |
| Turn-on switching loss  |   | $E_{on}$     | -     | 1.95 | -   |    |    |
| Turn-off switching loss |   | $E_{off}$    | -     | 0.60 | -   |    |    |
| Total switching loss    |   | $E_{ts}$     | -     | 2.55 | -   |    |    |
| Turn-on delay time      | $T_J = 150^{\circ}\text{C}$<br>$V_{CC} = 600\text{ V}, I_C = 25\text{ A}$<br>$R_g = 10\ \Omega$<br>$V_{GE} = 0\text{ V}/15\text{V}^*$ | $t_{d(on)}$  | -     | 84   | -   | ns |    |
| Rise time               |   | $t_r$        | -     | 94   | -   |    |    |
| Turn-off delay time     |   | $t_{d(off)}$ | -     | 185  | -   |    |    |
| Fall time               |   |              | $t_f$ | -    | 245 | -  | mJ |
| Turn-on switching loss  |   | $E_{on}$     | -     | 2.39 | -   |    |    |
| Turn-off switching loss |   | $E_{off}$    | -     | 1.26 | -   |    |    |
| Total switching loss    |   | $E_{ts}$     | -     | 3.65 | -   |    |    |

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

\*Includes diode reverse recovery loss using NGTB25N120FL2WG.

# NGTG25N120FL2WG

## TYPICAL CHARACTERISTICS

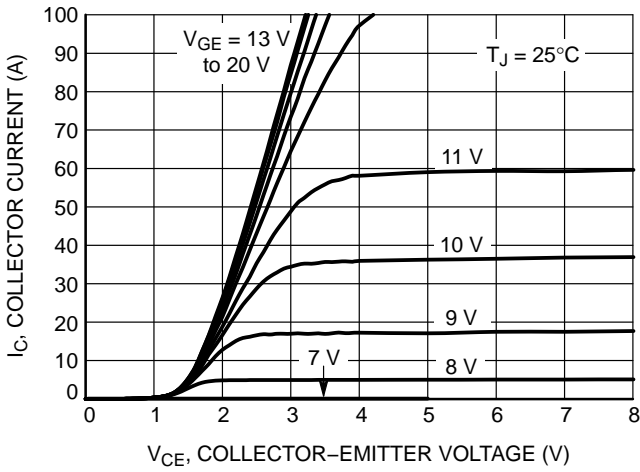


Figure 1. Output Characteristics

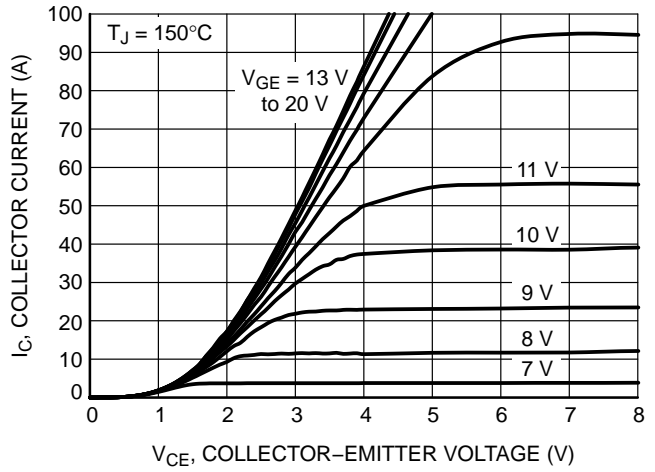


Figure 2. Output Characteristics

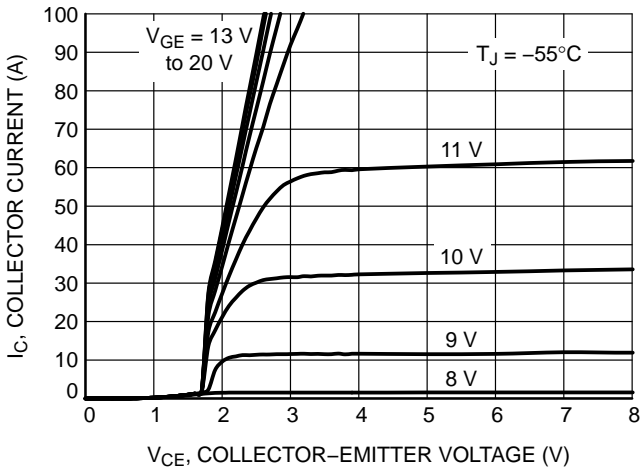


Figure 3. Output Characteristics

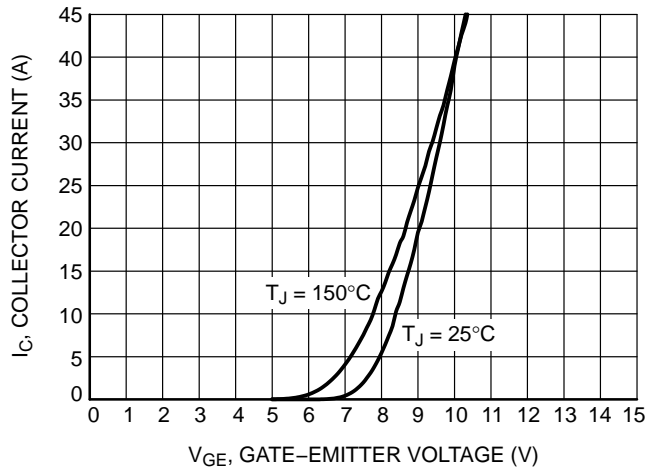


Figure 4. Typical Transfer Characteristics

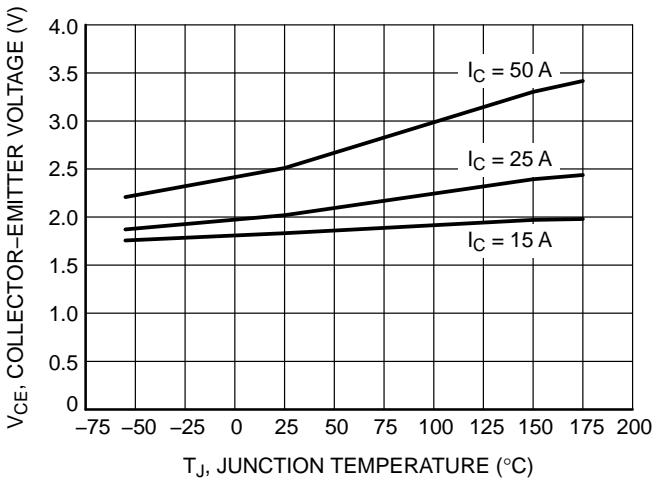


Figure 5.  $V_{CE(sat)}$  vs.  $T_J$

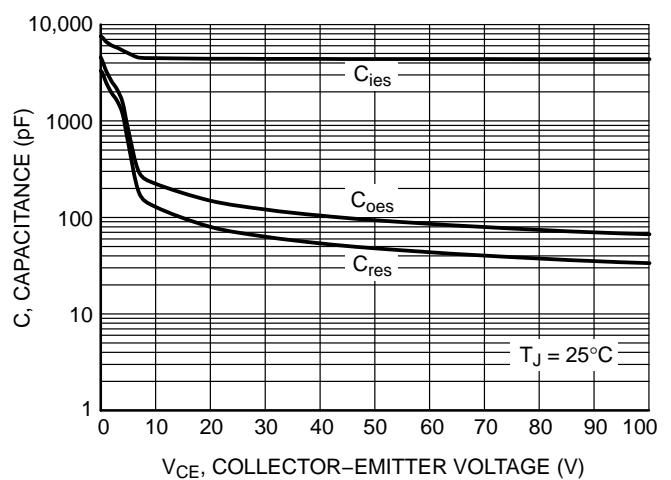


Figure 6. Typical Capacitance

# NGTG25N120FL2WG

## TYPICAL CHARACTERISTICS

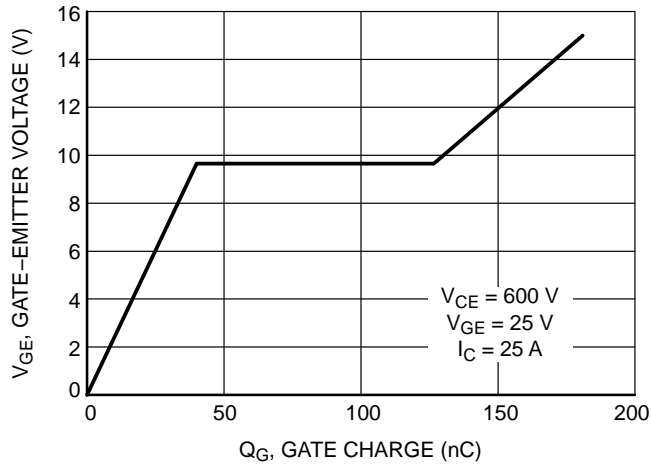


Figure 7. Typical Gate Charge

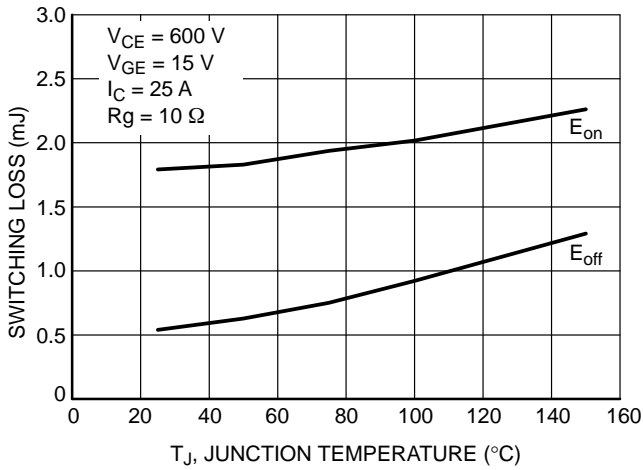


Figure 8. Switching Loss vs. Temperature

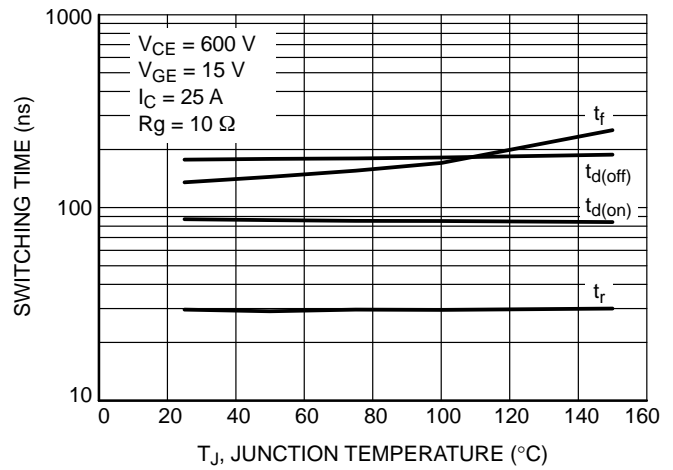


Figure 9. Switching Time vs. Temperature

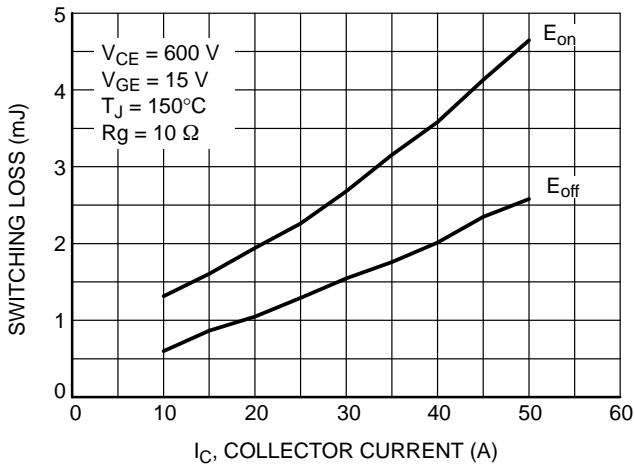


Figure 10. Switching Loss vs.  $I_C$

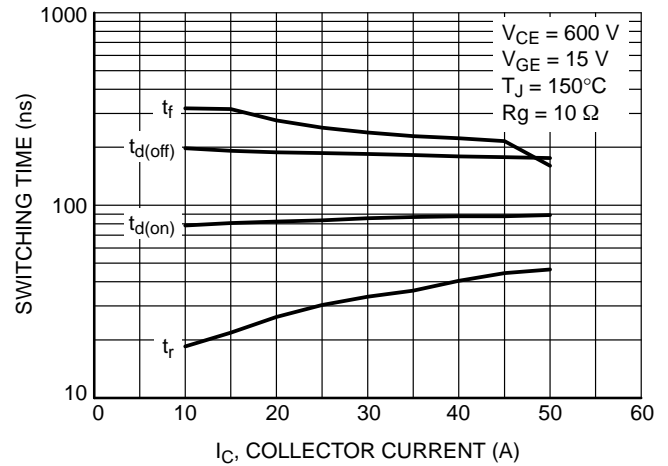


Figure 11. Switching Time vs.  $I_C$

# NGTG25N120FL2WG

## TYPICAL CHARACTERISTICS

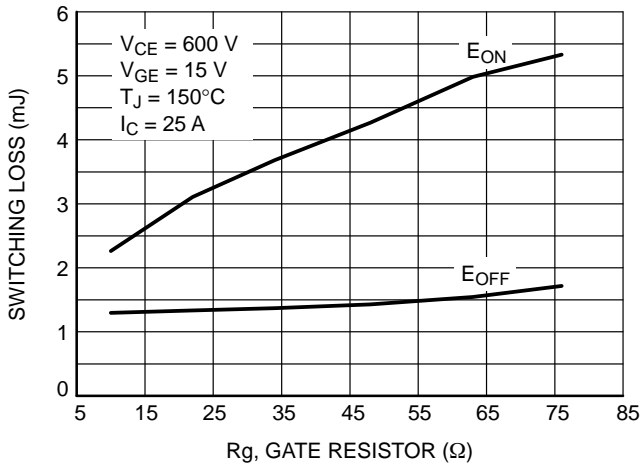


Figure 12. Switching Loss vs. Rg

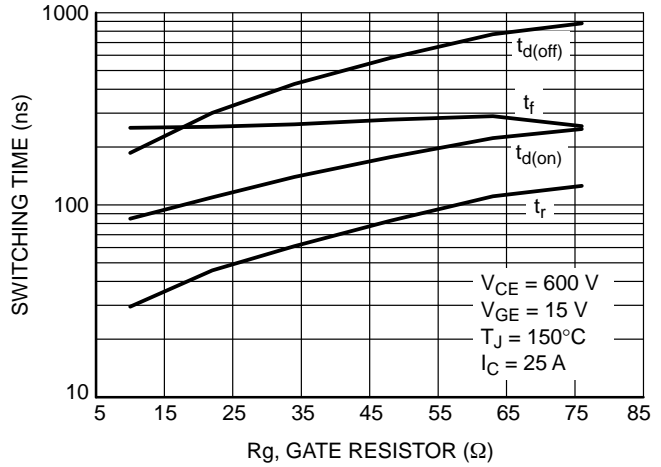


Figure 13. Switching Time vs. Rg

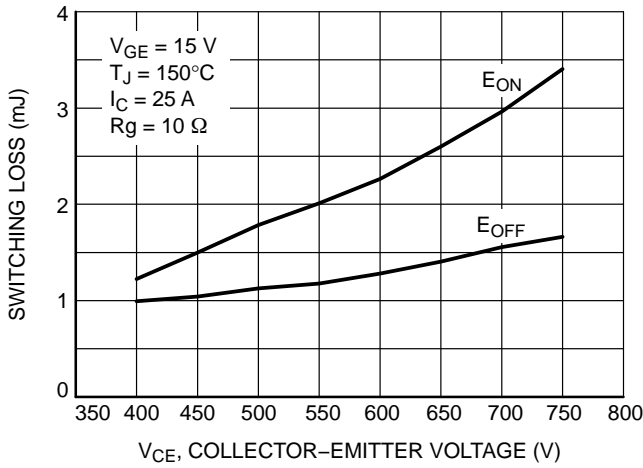


Figure 14. Switching Loss vs.  $V_{CE}$

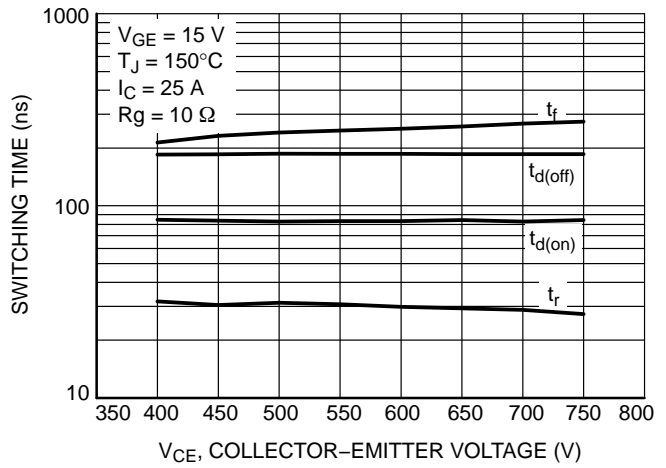


Figure 15. Switching Time vs.  $V_{CE}$

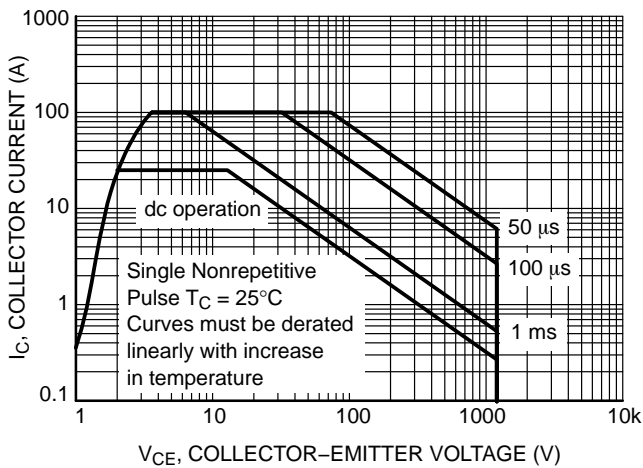


Figure 16. Safe Operating Area

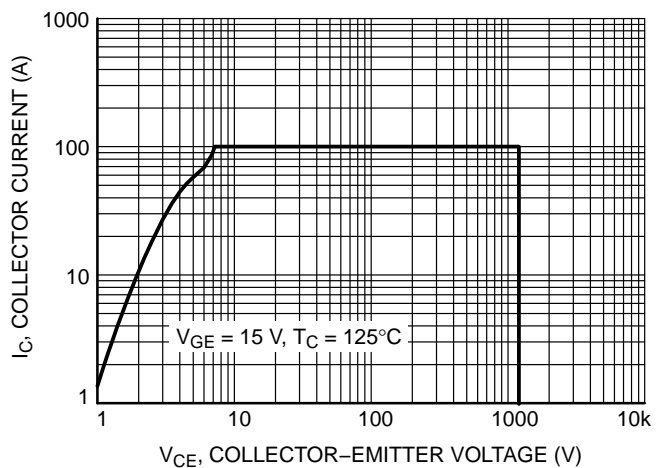


Figure 17. Reverse Bias Safe Operating Area

# NGTG25N120FL2WG

## TYPICAL CHARACTERISTICS

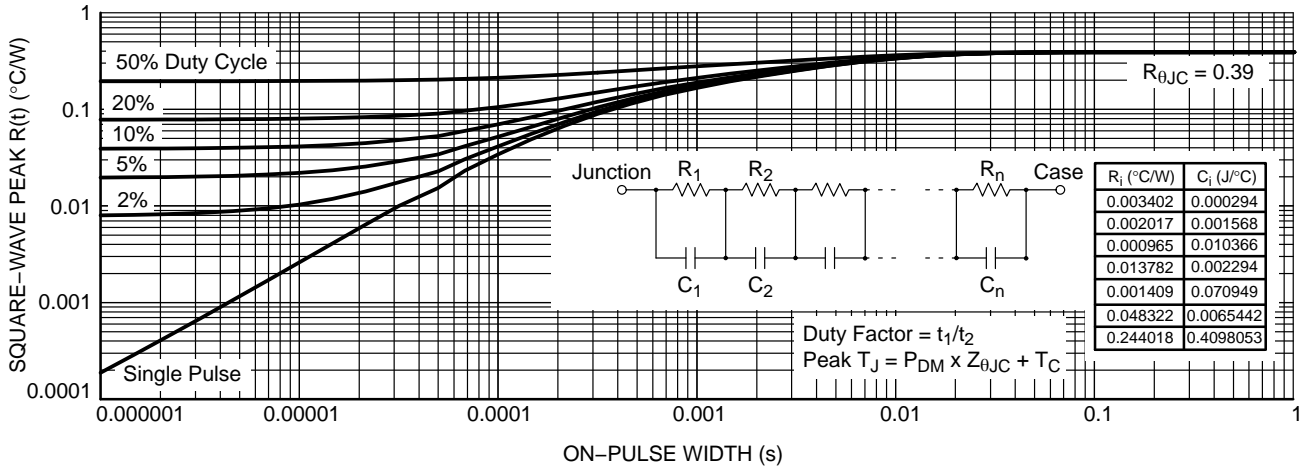


Figure 18. IGBT Die Self-heating Square-wave Duty Cycle Transient Thermal Response

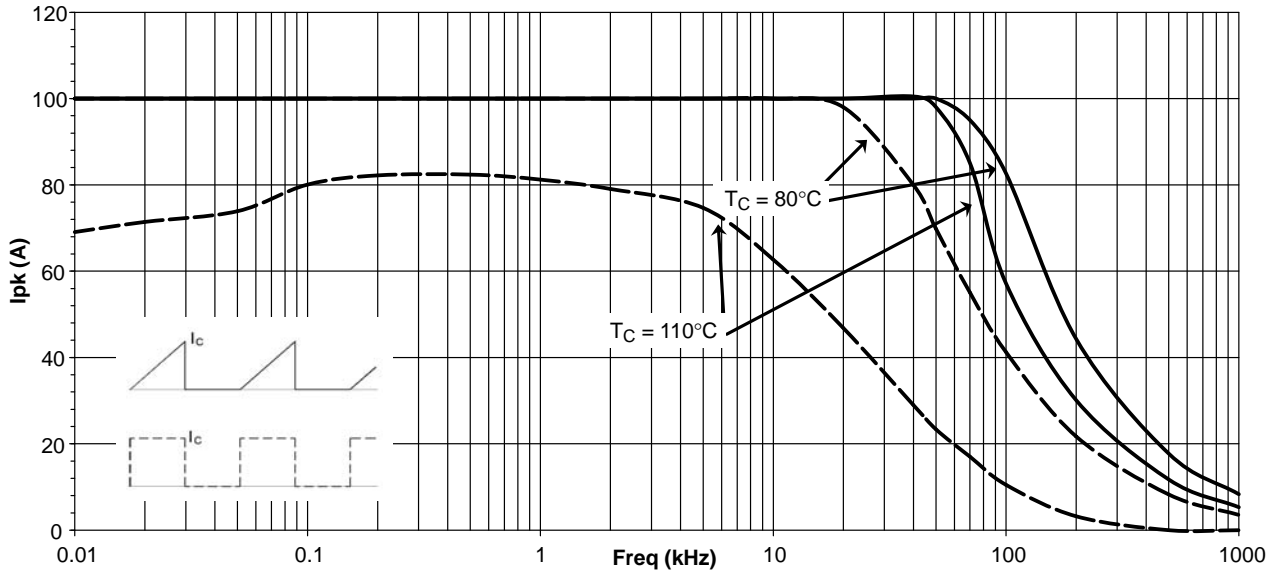


Figure 19. Collector Current vs. Switching Frequency

NGTG25N120FL2WG

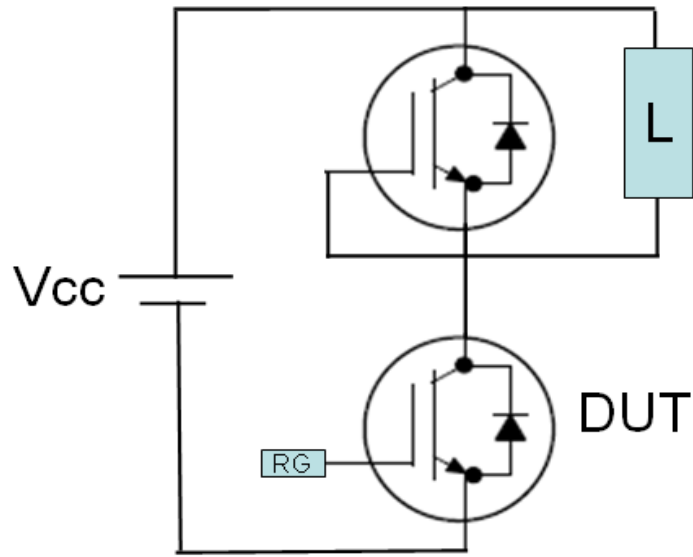


Figure 20. Test Circuit for Switching Characteristics

# NGTG25N120FL2WG

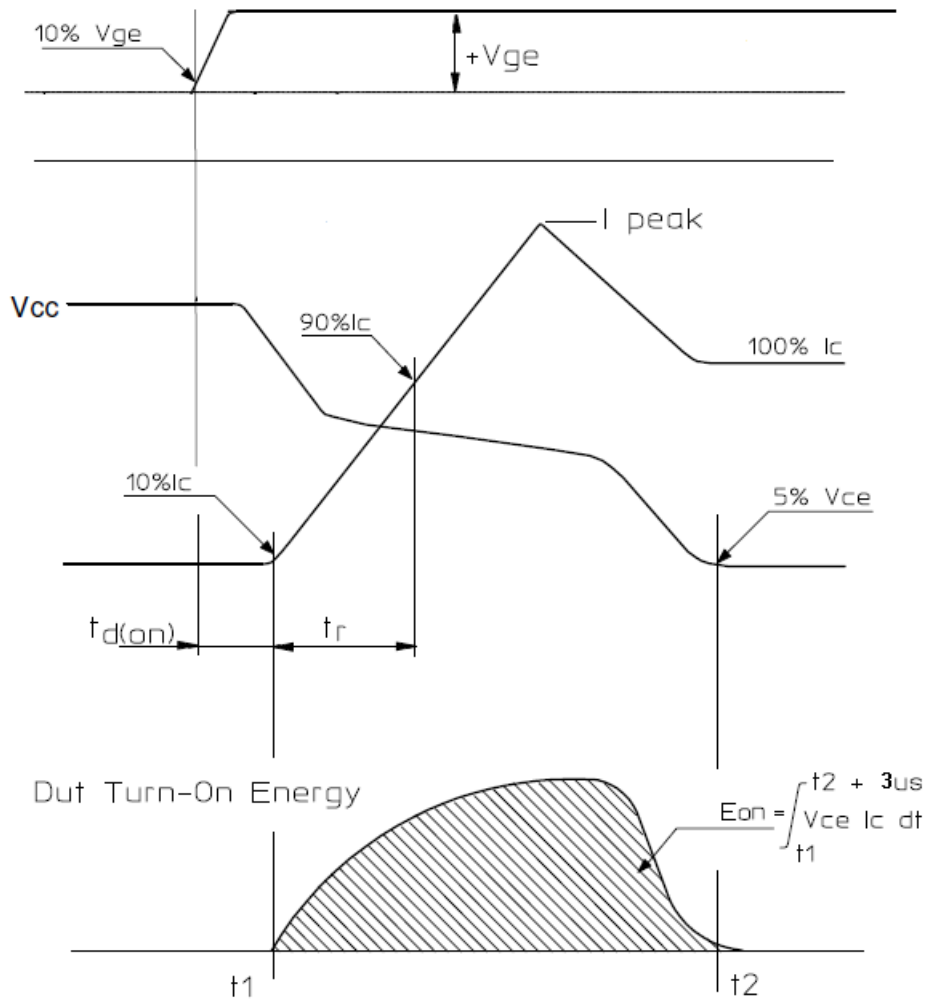


Figure 21. Definition of Turn On Waveform




NGTG25N120FL2WG




Figure 22. Definition of Turn Off Waveform

TO-247  
CASE 340AL  
ISSUE D

DATE 17 MAR 2017

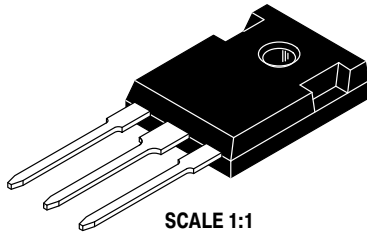

SCALE 1:1

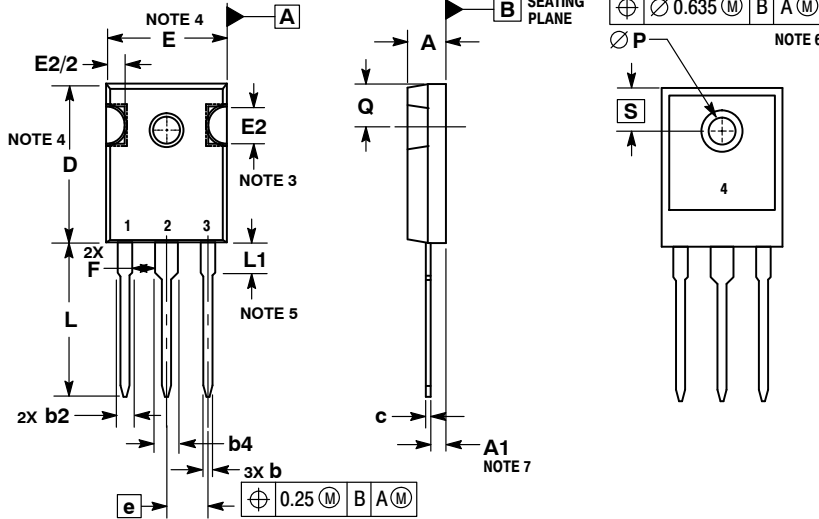


NOTES:

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: MILLIMETERS.
3. SLOT REQUIRED, NOTCH MAY BE ROUNDED.
4. DIMENSIONS D AND E DO NOT INCLUDE MOLD FLASH. MOLD FLASH SHALL NOT EXCEED 0.13 PER SIDE. THESE DIMENSIONS ARE MEASURED AT THE OUTERMOST EXTREME OF THE PLASTIC BODY.
5. LEAD FINISH IS UNCONTROLLED IN THE REGION DEFINED BY L1.
6.  $\varnothing P$  SHALL HAVE A MAXIMUM DRAFT ANGLE OF 1.5° TO THE TOP OF THE PART WITH A MAXIMUM DIAMETER OF 3.91.
7. DIMENSION A1 TO BE MEASURED IN THE REGION DEFINED BY L1.

| MILLIMETERS |          |       |
|-------------|----------|-------|
| DIM         | MIN      | MAX   |
| A           | 4.70     | 5.30  |
| A1          | 2.20     | 2.60  |
| b           | 1.07     | 1.33  |
| b2          | 1.65     | 2.35  |
| b4          | 2.60     | 3.40  |
| c           | 0.45     | 0.68  |
| D           | 20.80    | 21.34 |
| E           | 15.50    | 16.25 |
| E2          | 4.32     | 5.49  |
| e           | 5.45 BSC |       |
| F           | 2.655    | ---   |
| L           | 19.80    | 20.80 |
| L1          | 3.81     | 4.32  |
| P           | 3.55     | 3.65  |
| Q           | 5.40     | 6.20  |
| S           | 6.15 BSC |       |

GENERIC  
MARKING DIAGRAM\*

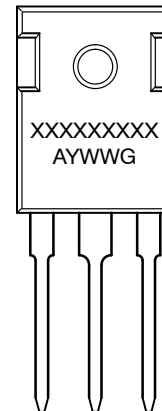

- XXXXX = Specific Device Code
- A = Assembly Location
- Y = Year
- WW = Work Week
- G = Pb-Free Package

\*This information is generic. Please refer to device data sheet for actual part marking.  
Pb-Free indicator, "G" or microdot "▪", may or may not be present.

|                  |             |   |
|------------------|-------------|---|
| DOCUMENT NUMBER: | 98AON16119F | Electronic versions are uncontrolled except when accessed directly from the Document Repository.<br>Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| DESCRIPTION:     | TO-247      | PAGE 1 OF 1   |

onsemi and ONSEMI are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

**onsemi**, **Onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## ADDITIONAL INFORMATION

### TECHNICAL PUBLICATIONS:

Technical Library: [www.onsemi.com/design/resources/technical-documentation](http://www.onsemi.com/design/resources/technical-documentation)  
onsemi Website: [www.onsemi.com](http://www.onsemi.com)

### ONLINE SUPPORT: [www.onsemi.com/support](http://www.onsemi.com/support)

For additional information, please contact your local Sales Representative at [www.onsemi.com/support/sales](http://www.onsemi.com/support/sales)