ON Semiconductor

Is Now



To learn more about onsemi™, please visit our website at www.onsemi.com

onsemi and ONSEMI. and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. onsemi reserves the right to make changes at any time to any products or information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/ or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use onsemi products for any such unintended or unauthorized application,

Single 2-Input AND Gate

NL17SV08


The NL17SV08 is a single 2-input AND gate in tiny footprint packages. The device is designed to operate for $V_{CC} = 0.9 \text{ V}$ to 3.6 V.


Features


- Designed for 0.9 V to 3.6 V V_{CC} Operation
- 1.6 ns t_{PD} at 3.3 V (Typ)
- Inputs/Outputs Over-Voltage Tolerant up to 3.6 V
- I_{OFF} Supports Partial Power Down Protection
- Source/Sink 24 mA at 3.3 V
- Available in SOT-353, SOT-553, SOT-953, SC-74A and UDFN Packages
- NLV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q100 Qualified and PPAP Capable
- These Devices are Pb–Free, Halogen Free/BFR Free and are RoHS Compliant



Figure 1. Logic Symbol











Figure 2. Pinout (Top View)



ON Semiconductor®

www.onsemi.com

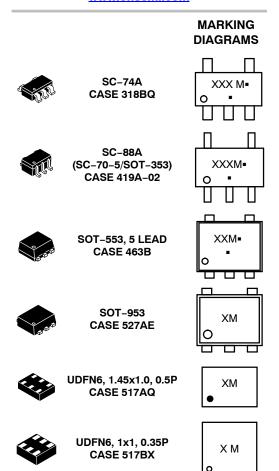

X, XX = Specific Device Code

M = Date Code* ■ = Pb-Free Package

(Note: Microdot may be in either location)

*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "•", may or may not be present.

ORDERING INFORMATION

See detailed ordering, marking and shipping information in the package dimensions section on page 6 of this data sheet.

PIN ASSIGNMENT

| Pin | SOT-953 | SC88A / SOT553 / SC-74A | UDFN6 |
|-----|-----------------|----------------------------|-----------------|
| 1 | Α | В | В |
| 2 | GND | Α | А |
| 3 | В | GND | GND |
| 4 | Υ | Υ | Y |
| 5 | V _{CC} | V _{CC} | NC |
| 6 | - | - | V _{CC} |

FUNCTION TABLE

| Inp | Output Y = AB | |
|-----|------------------|---|
| Α | В | Υ |
| L | L | L |
| L | Н | L |
| Н | L | L |
| Н | Н | Н |

MAXIMUM RATINGS

| Symbol | Characteristics | | Value | Unit |
|-------------------------------------|-------------------------------------------------|-------------------------------------------------------------------|---------------------------------------------------------------|------|
| V _{CC} | DC Supply Voltage | | -0.5 to +4.3 | V |
| V _{IN} | DC Input Voltage | | -0.5 to +4.3 | V |
| V _{OUT} | Tri–St | High or Low State) ate Mode (Note 1) Mode (V _{CC} = 0 V) | -0.5 to V _{CC} + 0.5 -0.5 to +4.3 -0.5 to +4.3 | V |
| I _{IK} | DC Input Diode Current | V _{IN} < GND | -50 | mA |
| I _{OK} | DC Output Diode Current | V _{OUT} < GND | -50 | mA |
| l _{OUT} | DC Output Source/Sink Current | | ±50 | mA |
| I _{CC} or I _{GND} | DC Supply Current per Supply Pin or Ground Pin | | ±50 | mA |
| T _{STG} | Storage Temperature Range | | -65 to +150 | °C |
| TL | Lead Temperature, 1 mm from Case for 10 Seconds | | 260 | °C |
| TJ | Junction Temperature Under Bias | | +150 | °C |
| θ_{JA} | Thermal Resistance (Note 2) | SC-88A SOT-553 SOT-953 SC-74A UDFN6 | 377 324 254 320 154 | °C/W |
| P _D | Power Dissipation in Still Air | SC-88A SOT-553 SOT-953 SC-74A UDFN6 | 332 386 491 390 812 | mW |
| MSL | Moisture Sensitivity | | Level 1 | - |
| F _R | Flammability Rating Oxyg | en Index: 28 to 34 | UL 94 V-0 @ 0.125 in | - |
| V _{ESD} | | uman Body Model ged Device Model | 2000 1000 | V |
| I _{Latchup} | Latchup Performance (Note 4) | | ±100 | mA |

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

- 1. Applicable to devices with outputs that may be tri-stated.
- Measured with minimum pad spacing on an FR4 board, using 10 mm-by-1 inch, 2 ounce copper trace no air flow per JESD51-7.
 HBM tested to EIA / JESD22-A114-A. CDM tested to JESD22-C101-A. JEDEC recommends that ESD qualification to EIA/JESD22-A115A (Machine Model) be discontinued.
 4. Tested to EIA/JESD78 Class II.

RECOMMENDED OPERATING CONDITIONS

| Symbol | Parameter | | Max | Unit |
|---------------------------------|----------------------------------------------------------------------------------|--------------|-------------------------------|------|
| V _{CC} | Positive DC Supply Voltage | 0.9 | 3.6 | V |
| V _{IN} | DC Input Voltage | 0 | 3.6 | V |
| V _{OUT} | DC Output Voltage Active-Mode (High or L Tri-State Mode Power-Down Mode (V | e (Note 1) 0 | V _{CC} 3.6 3.6 | |
| T _A | Operating Temperature Range | | +125 | °C |
| t _r , t _f | Input Transition Rise and Fall Time | | 20 | ns/V |

Functional operation above the stresses listed in the Recommended Operating Ranges is not implied. Extended exposure to stresses beyond the Recommended Operating Ranges limits may affect device reliability.

DC ELECTRICAL CHARACTERISTICS

| | | | | T | A = 25° | С | T _A = -55°C | to +125°C | | |
|-----------------|------------------------------|-------------------------------|---------------------|------------------------|--------------------------|------------------------|------------------------|------------------------|------|--|
| Symbol | Parameter | Condition | V _{CC} (V) | Min | Тур | Max | Min | Max | Unit | |
| V _{IH} | High-Level Input | | 0.9 | - | 0.5 | - | - | - | ٧ | |
| | Voltage | | 1.1 to 1.3 | 0.65 x V _{CC} | - | - | 0.65 x V _{CC} | - | 1 | |
| | | | 1.4 to 1.6 | 0.65 x V _{CC} | - | - | 0.65 x V _{CC} | - | 1 | |
| | | | 1.65 – 1.95 | 0.65 x V _{CC} | - | - | 0.65 x V _{CC} | - | 1 | |
| | | | 2.3 to < 2.7 | 1.6 | - | - | 1.6 | - | | |
| | | | 2.7 to 3.6 | 2.0 | - | - | 2.0 | - | | |
| V _{IL} | Low-Level Input | | 0.9 | - | 0.5 | - | - | - | ٧ | |
| | Voltage | | 1.1 to 1.3 | - | - | 0.35 x V _{CC} | _ | 0.35 x V _{CC} | 1 | |
| | | | 1.4 to 1.6 | - | - | 0.35 x V _{CC} | - | 0.35 x V _{CC} | | |
| | | | 1.65 – 1.95 | - | - | 0.35 x V _{CC} | - | 0.35 x V _{CC} | 1 | |
| | | | 2.3 to < 2.7 | - | - | 0.7 | - | 0.7 | | |
| | | | 2.7 to 3.6 | - | - | 0.8 | - | 0.8 | | |
| V _{OH} | High-Level Output Voltage | $V_{IN} = V_{IH}$ or V_{IL} | | | | | | | ٧ | |
| | | I _{OH} = -100 μA | 0.9 | _ | V _{CC} – 0.1 | _ | - | - | | |
| | | | 1.1 to 1.3 | V _{CC} - 0.1 | - | - | V _{CC} - 0.1 | - | | |
| | | | | 1.4 to 1.6 | V _{CC} – 0.1 | _ | - | V _{CC} - 0.1 | - | |
| | | | 1.65 to 1.95 | V _{CC} - 0.2 | - | - | V _{CC} - 0.2 | - | | |
| | | | 2.3 to <2.7 | V _{CC} – 0.2 | - | - | V _{CC} - 0.2 | - | | |
| | | | 2.7 to 3.6 | V _{CC} – 0.2 | - | - | V _{CC} - 0.2 | - | | |
| | | $I_{OH} = -2 \text{ mA}$ | 1.1 o 1.3 | 0.75 x V _{CC} | _ | - | 0.75 x V _{CC} | - | | |
| | | $I_{OH} = -4 \text{ mA}$ | 1.4 to 1.6 | 0.75 x V _{CC} | _ | - | 0.75 x V _{CC} | - | 1 | |
| | | $I_{OH} = -6 \text{ mA}$ | 1.65 to 1.95 | 1.25 | - | - | 1.25 | - | | |
| | | | 2.3 to 2.7 | 2.0 | - | - | 2.0 | - | | |
| | | $I_{OH} = -12 \text{ mA}$ | 2.3 to 2.7 | 1.8 | - | - | 1.8 | - | | |
| | | | 2.7 to 3.6 | 2.2 | - | - | 2.2 | - | | |
| | | I _{OH} = −18 mA | 2.3 to 2.7 | 1.7 | _ | - | 1.7 | - | | |
| | | | 2.7 to 3.6 | 2.4 | - | - | 2.4 | - | | |
| | | $I_{OH} = -24 \text{ mA}$ | 2.7 to 3.6 | 2.2 | - | - | 2.2 | _ | | |

DC ELECTRICAL CHARACTERISTICS (continued)

| | | | | 7 | Γ _A = 25° | С | T _A = -55°0 | C to +125°C | |
|------------------|-----------------------------------|--------------------------------------------------------|---------------------|-----|----------------------|------------------------|------------------------|------------------------|------|
| Symbol | Parameter | Condition | V _{CC} (V) | Min | Тур | Max | Min | Max | Unit |
| V _{OL} | Low-Level Output Voltage | $V_{IN} = V_{IH}$ or V_{IL} | | | | | | | V |
| | | I _{OL} = 100 μA | 0.9 | _ | 0.1 | - | - | - | |
| | | | 1.1 to 1.3 | - | - | 0.1 | - | 0.1 | |
| | | | 1.4 to 1.6 | - | - | 0.1 | - | 0.1 | |
| | | | 1.65 to 1.95 | - | - | 0.2 | - | 0.2 | |
| | | | 2.3 to < 2.7 | - | - | 0.2 | - | 0.2 | |
| | | | 2.7 to 3.6 | - | _ | 0.2 | - | 0.2 | |
| | | I _{OL} = 2 mA | 1.1 o 1.3 | - | - | 0.25 x V _{CC} | - | 0.25 x V _{CC} | |
| | | I _{OL} = 4 mA | 1.4 to 1.6 | - | - | 0.25 x V _{CC} | - | 0.25 x V _{CC} | |
| | | I _{OL} = 6 mA | 1.65 to 1.95 | - | - | 0.3 | - | 0.3 | |
| | | | 2.3 to 2.7 | - | _ | 0.3 | - | 0.3 | |
| | | I _{OL} = 12 mA | 2.3 to 2.7 | - | - | 0.4 | - | 0.4 | |
| | | | 2.7 to 3.6 | - | _ | 0.4 | - | 0.4 | |
| | | I _{OL} = 18 mA | 2.3 to 2.7 | - | - | 0.6 | - | 0.6 | |
| | | | 2.7 to 3.6 | - | - | 0.4 | - | 0.4 | |
| | | I _{OL} = 24 mA | 2.7 to 3.6 | - | _ | 0.55 | - | 0.55 | |
| I _{IN} | Input Leakage Current | V _{IN} = 3.6 V or GND | 0.9 to 3.6 | _ | _ | ±0.1 | _ | ±0.9 | μΑ |
| l _{OZ} | 3-State Output Leakage Current | V _{OUT} = 0 V to 3.6 V | 0.9 to 3.6 | _ | - | ±0.5 | _ | ±5.0 | μΑ |
| I _{OFF} | Power Off Leakage Current | V _{IN} = 3.6 V or V _{OUT} = 3.6 V | 0 | - | - | 1.0 | - | 5.0 | μΑ |
| I _{CC} | Quiescent Supply Current | V _{IN} = V _{CC} or GND | 0.9 to 3.6 | 1 | _ | 0.9 | ı | 5.0 | μΑ |

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.


AC ELECTRICAL CHARACTERISTICS

| | | | | 1 | T _A = 25°C |) | T _A = -55°C | to +125°C | |
|-------------------------------------|------------------------------------|---------------------------------------------------|---------------------|-----|-----------------------|------|------------------------|-----------|------|
| Symbol | Parameter | Condition | V _{CC} (V) | Min | Тур | Max | Min | Max | Unit |
| t _{PLH} , t _{PHL} | Propagation Delay, | $R_L = 1 M\Omega$, $C_L = 15 pF$ | 0.9 | - | 15.9 | - | - | - | ns |
| | (A or B) to Y (Figures 3 and 4) | $R_L = 2 \text{ k}\Omega$, $C_L = 15 \text{ pF}$ | 1.10 to 1.30 | - | 6.8 | 11.6 | - | 14.6 | |
| | | , | 1.40 to 1.60 | - | 3.6 | 6.0 | - | 7.2 | |
| | | $R_L = 500 \Omega$, $C_L = 30 pF$ | 1.65 to 1.95 | - | 2.6 | 4.5 | - | 5.3 | |
| | | | 2.3 to 2.7 | - | 1.9 | 2.6 | - | 3.7 | |
| | | | 2.7 to 3.6 | _ | 1.6 | 2.3 | _ | 3.0 | |

CAPACITIVE CHARACTERISTICS

| Symbol | Parameter | Test Condition | Typical (T _A = 25°C) | Unit |
|------------------|----------------------------------------|-------------------------------------------------------------|---------------------------------|------|
| C _{IN} | Input Capacitance | V _{CC} = 0 V | 2.0 | pF |
| C _{OUT} | Output Capacitance | V _{CC} = 0 V | 4.5 | pF |
| C _{PD} | Power Dissipation Capacitance (Note 5) | 10 MHz, V_{CC} = 0.9 to 3.6 V, V_{IN} = 0 V or V_{CC} | 20 | pF |

^{5.} C_{PD} is defined as the value of the internal equivalent capacitance which is calculated from the operating current consumption without load. Average operating current can be obtained by the equation I_{CC(OPR)} = C_{PD} • V_{CC} • f_{in} + I_{CC}. C_{PD} is used to determine the no–load dynamic power consumption: P_D = C_{PD} • V_{CC}² • f_{in} + I_{CC} • V_{CC}.

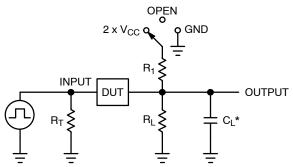


| Test | Switch Position |
|-------------------------------------|---------------------|
| t _{PLH} / t _{PHL} | Open |
| t _{PLZ} / t _{PZL} | 2 x V _{CC} |
| t _{PHZ} / t _{PZH} | GND |

C_L includes probe and jig capacitance

 R_T is Z_{OUT} of pulse generator (typically 50 Ω) f=1 MHz

Figure 3. Test Circuit

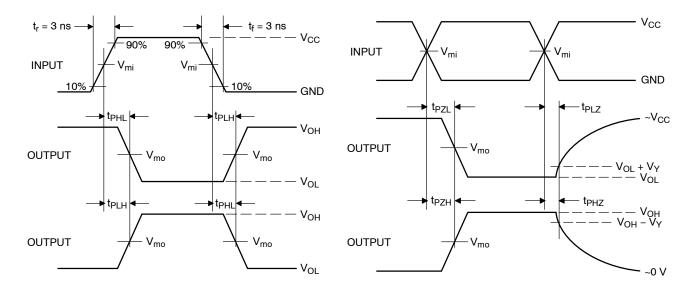

| | | V _{mo} , V | | |
|---------------------|---------------------|-------------------------------------|-----------------------------------------------|--------------------|
| V _{CC} , V | V _{mi} , V | t _{PLH} , t _{PHL} | t_{PZL} , t_{PLZ} , t_{PZH} , t_{PHZ} | V _Y , V |
| 0.9 | V _{CC} /2 | V _{CC} / 2 | V _{CC} / 2 | 0.1 |
| 1.1 to 1.3 | V _{CC} /2 | V _{CC} / 2 | V _{CC} / 2 | 0.1 |
| 1.4 to 1.6 | V _{CC} /2 | V _{CC} / 2 | V _{CC} / 2 | 0.1 |
| 1.65 to 1.95 | V _{CC} /2 | V _{CC} / 2 | V _{CC} / 2 | 0.15 |
| 2.3 to 2.7 | V _{CC} /2 | V _{CC} / 2 | V _{CC} / 2 | 0.15 |
| 3.0 to 3.6 | 1.5 | 1.5 | 1.5 | 0.3 |

Figure 4. Switching Waveforms

ORDERING INFORMATION


| Device | Package | Marking | Pin 1 Orientation (See below) | Shipping [†] |
|----------------------------------------------|-------------------------|---------|----------------------------------|-----------------------|
| NL17SV08DFT2G (Contact ON Semiconductor) | SC-88A | TBD | Q4 | 3000 / Tape & Reel |
| NL17SV08XV5T2G | SOT-553 | UG | Q4 | 4000 / Tape & Reel |
| NL17SV08P5T5G (Contact ON Semiconductor) | SOT-953 | TBD | Q2 | 8000 / Tape & Reel |
| NL17SV08DBVT1G (Contact ON Semiconductor) | SC-74A | TBD | Q4 | 3000 / Tape & Reel |
| NL17SV08MU1TCG (Contact ON Semiconductor) | UDFN6, 1.45 x 1.0, 0.5P | TBD | Q4 | 3000 / Tape & Reel |
| NL17SV08MU3TCG (Contact ON Semiconductor) | UDFN6, 1.0 x 1.0, 0.35P | TBD | Q4 | 3000 / Tape & Reel |

[†]For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

Pin 1 Orientation in Tape and Reel

Direction of Feed






^{*}NLV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q100 Qualified and PPAP Capable.

PACKAGE DIMENSIONS

SC-74A CASE 318BQ **ISSUE B**

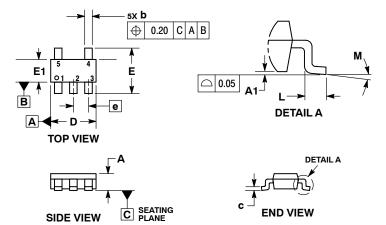


NOTES:

- NOTES:

 1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
 2. CONTROLLING DIMENSION: MILLIMETERS.
 3. MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH THICKNESS. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF BASE MATERIAL.
 4. DIMENSIONS A AND B DO NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR GATE BURRS. MOLD FLASH, PROTRUSIONS, OR GATE BURRS SHALL NOT EXCEPT 0.15 PER SIDE EXCEED 0.15 PER SIDE.

| | MILLIMETERS | | | | |
|-----|-------------|------|--|--|--|
| DIM | MIN | MAX | | | |
| Α | 0.90 | 1.10 | | | |
| A1 | 0.01 | 0.10 | | | |
| b | 0.25 | 0.50 | | | |
| С | 0.10 | 0.26 | | | |
| D | 2.85 | 3.15 | | | |
| E | 2.50 | 3.00 | | | |
| E1 | 1.35 | 1.65 | | | |
| е | 0.95 BSC | | | | |
| L | 0.20 | 0.60 | | | |
| М | 0 ° | 10° | | | |


RECOMMENDED SOLDERING FOOTPRINT*



*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

PACKAGE DIMENSIONS

SC-88A (SC-70-5/SOT-353) CASE 419A-02 **ISSUE L**

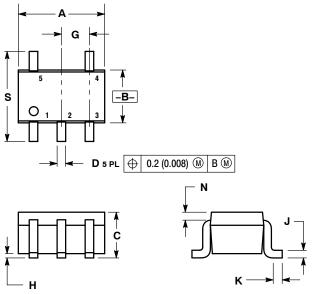

NOTES:

- NOTES:

 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.


 2. CONTROLLING DIMENSION: INCH.

 3. 419A-01 OBSOLETE: NEW STANDARD 419A-02.

 4. DIMENSIONS A AND B DO NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR GATE PLURGE. BURRS.

| | INCHES | | MILLIMETERS | |
|-----|-----------|-------|-------------|------|
| DIM | MIN | MAX | MIN | MAX |
| Α | 0.071 | 0.087 | 1.80 | 2.20 |
| В | 0.045 | 0.053 | 1.15 | 1.35 |
| С | 0.031 | 0.043 | 0.80 | 1.10 |
| D | 0.004 | 0.012 | 0.10 | 0.30 |
| G | 0.026 BSC | | 0.65 BSC | |
| Н | | 0.004 | | 0.10 |
| J | 0.004 | 0.010 | 0.10 | 0.25 |
| K | 0.004 | 0.012 | 0.10 | 0.30 |
| N | 0.008 REF | | 0.20 REF | |
| S | 0.079 | 0.087 | 2.00 | 2.20 |

SOLDER FOOTPRINT

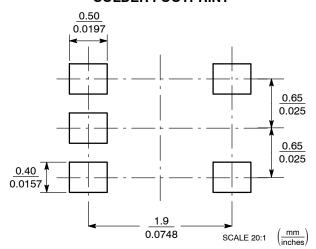

| STYLE 1: PIN 1. BASE 2. EMITTER 3. BASE 4. COLLECTOR 5. COLLECTOR |
|---------------------------------------------------------------------------|
| STYLE 6: PIN 1. EMITTER 2 2. BASE 2 3. EMITTER 1 4. COLLECTOR |

5. COLLECTOR 2/BASE 1

3. BASE 4. COLLECTOR 5. CATHODE

PIN 1. ANODE 2. EMITTER

STYLE 2:

STYLE 7: PIN 1. BASE 2. EMITTER 3. BASE 4. COLLECTOR 5. COLLECTOR

STYLE 3: PIN 1. ANODE 1 2. N/C 3. ANODE 2 4. CATHODE 2 5. CATHODE 1

STYLE 8: PIN 1. CATHODE
2. COLLECTOR
3. N/C
4. BASE

5. EMITTER

STYLE 4: PIN 1. SOURCE 1 2. DRAIN 1/2 3. SOURCE 1 4. GATE 1 5. GATE 2


STYLE 9: PIN 1. ANODE 2. CATHODE 3. ANODE 4. ANODE 5. ANODE STYLE 5:

PIN 1. CATHODE
2. COMMON ANODE
3. CATHODE 2
4. CATHODE 3
5. CATHODE 4


PACKAGE DIMENSIONS

SOT-553, 5 LEAD CASE 463B

ISSUE C

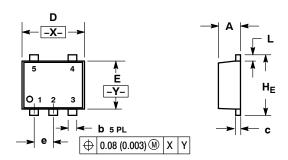

RECOMMENDED SOLDERING FOOTPRINT*



*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.


- NOTES:
 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
 2. CONTROLLING DIMENSION: MILLIMETERS
 3. MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH
 THICKNESS. MINIMUM LEAD THICKNESS IS THE MINIMUM
 THICKNESS OF BASE MATERIAL.

| | MILLIMETERS | | INCHES | | | |
|-----|-------------|------|--------|-----------|-------|-------|
| DIM | MIN | NOM | MAX | MIN | NOM | MAX |
| Α | 0.50 | 0.55 | 0.60 | 0.020 | 0.022 | 0.024 |
| b | 0.17 | 0.22 | 0.27 | 0.007 | 0.009 | 0.011 |
| C | 0.08 | 0.13 | 0.18 | 0.003 | 0.005 | 0.007 |
| D | 1.55 | 1.60 | 1.65 | 0.061 | 0.063 | 0.065 |
| E | 1.15 | 1.20 | 1.25 | 0.045 | 0.047 | 0.049 |
| е | 0.50 BSC | | | 0.020 BSC | | |
| L | 0.10 | 0.20 | 0.30 | 0.004 | 0.008 | 0.012 |
| HE | 1.55 | 1.60 | 1.65 | 0.061 | 0.063 | 0.065 |

| STYLE 1: PIN 1. BASE 2. EMITTER 3. BASE 4. COLLECTOR 5. COLLECTOR | STYLE 2: PIN 1. CATHODE 2. COMMON ANODE 3. CATHODE 2 4. CATHODE 3 5. CATHODE 4 | STYLE 3: PIN 1. ANODE 1 2. N/C 3. ANODE 2 4. CATHODE 2 5. CATHODE 1 | STYLE 4: PIN 1. SOURCE 1 2. DRAIN 1/2 3. SOURCE 1 4. GATE 1 5. GATE 2 | STYLE 5: PIN 1. ANODE 2. EMITTER 3. BASE 4. COLLECTOR 5. CATHODE |
|---------------------------------------------------------------------------------------|--------------------------------------------------------------------------------|------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|------------------------------------------------------------------|
| STYLE 6: PIN 1. EMITTER 2 2. BASE 2 3. EMITTER 1 4. COLLECTOR 1 5. COLLECTOR 2/BASE 1 | STYLE 7: PIN 1. BASE 2. EMITTER 3. BASE 4. COLLECTOR 5. COLLECTOR | STYLE 8: PIN 1. CATHODE 2. COLLECTOR 3. N/C 4. BASE 5. EMITTER | STYLE 9: PIN 1. ANODE 2. CATHODE 3. ANODE 4. ANODE 5. ANODE | |


PACKAGE DIMENSIONS

UDFN6, 1.45x1.0, 0.5P CASE 517AQ ISSUE O

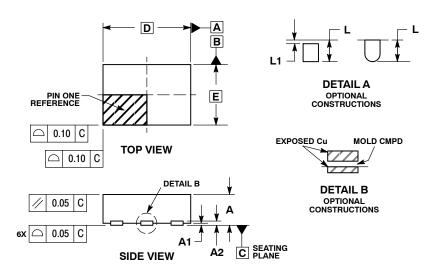


- NOTES:
 1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
 2. CONTROLLING DIMENSION: MILLIMETERS.
 3. DIMENSION & APPLIES TO PLATED TERMINAL AND IS MEASURED BETWEEN 0.15 AND 0.30 mm FROM THE TERMINAL TIP.

| | MILLIMETERS | | | |
|-----|-------------|------|--|--|
| DIM | MIN | MAX | | |
| Α | 0.45 | 0.55 | | |
| A1 | 0.00 | 0.05 | | |
| A2 | 0.07 REF | | | |
| b | 0.20 0.30 | | | |
| D | 1.45 BSC | | | |
| Е | 1.00 BSC | | | |
| е | 0.50 BSC | | | |
| L | 0.30 0.40 | | | |
| L1 | 0.15 | | | |



MOUNTING FOOTPRINT




DIMENSIONS: MILLIMETERS


^{*}For additional information on our Pb–Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

PACKAGE DIMENSIONS

UDFN6, 1x1, 0.35P CASE 517BX ISSUE O

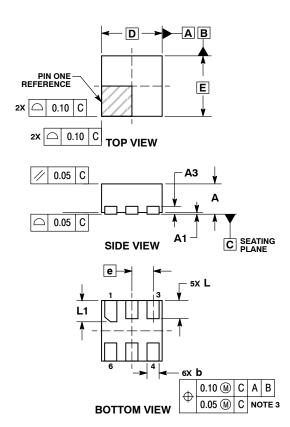

RECOMMENDED




*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.


- NOTES:
 1. DIMENSIONING AND TOLERANCING PER
- DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
 CONTROLLING DIMENSION: MILLIMETERS.
 DIMENSION b APPLIES TO PLATED TERMINAL AND IS MEASURED BETWEEN 0.15 AND 0.20 MM FROM TERMINAL TIP.
 PACKAGE DIMENSIONS EXCLUSIVE OF BURRS AND MOLD FLASH.


| | MILLIMETERS | | | |
|-----|-------------|------|--|--|
| DIM | MIN | MAX | | |
| Α | 0.45 | 0.55 | | |
| A1 | 0.00 | 0.05 | | |
| А3 | 0.13 REF | | | |
| b | 0.12 0.22 | | | |
| D | 1.00 BSC | | | |
| Е | 1.00 BSC | | | |
| е | 0.35 BSC | | | |
| L | 0.25 | 0.35 | | |
| L1 | 0.30 | 0.40 | | |

PACKAGE DIMENSIONS

SOT-953 CASE 527AE **ISSUE E**








NOTES:

- 1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
- CONTROLLING DIMENSION: MILLIMETERS
- MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH. MINIMUM LEAD THICKNESS IS THE
- MINIMUM THICKNESS OF THE BASE MATERIAL.
 DIMENSIONS D AND E DO NOT INCLUDE MOLD
 FLASH, PROTRUSIONS, OR GATE BURRS.

| | MILLIMETERS | | | |
|-----|-------------|------|------|--|
| DIM | MIN | NOM | MAX | |
| Α | 0.34 | 0.37 | 0.40 | |
| b | 0.10 | 0.15 | 0.20 | |
| С | 0.07 | 0.12 | 0.17 | |
| D | 0.95 | 1.00 | 1.05 | |
| E | 0.75 | 0.80 | 0.85 | |
| е | 0.35 BSC | | | |
| HE | 0.95 | 1.00 | 1.05 | |
| L | 0.175 REF | | | |
| L2 | 0.05 | 0.10 | 0.15 | |
| L3 | | | 0.15 | |

SOLDERING FOOTPRINT*



*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

ON Semiconductor and IN are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability. arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

ON Semiconductor Website: www.onsemi.com

LITERATURE FULFILLMENT: Email Requests to: orderlit@onsemi.com TECHNICAL SUPPORT

North American Technical Support: Voice Mail: 1 800-282-9855 Toll Free USA/Canada Phone: 011 421 33 790 2910

Europe, Middle East and Africa Technical Support:

Phone: 00421 33 790 2910

For additional information, please contact your local Sales Representative