# **Power MOSFET**

# 40 V, 5.6 m $\Omega$ , 69 A, Single N-Channel

#### **Features**

- Small Footprint (3.3 x 3.3 mm) for Compact Design
- Low R<sub>DS(on)</sub> to Minimize Conduction Losses
- Low Capacitance to Minimize Driver Losses
- These Devices are Pb-Free and are RoHS Compliant

# MAXIMUM RATINGS (T<sub>J</sub> = 25°C unless otherwise noted)

Parar	Symbol	Value	Unit		
Drain-to-Source Voltag	V <sub>DSS</sub>	40	V		
Gate-to-Source Voltage	Э		V <sub>GS</sub>	±20	V
Continuous Drain Current Raic		T <sub>C</sub> = 25°C	I <sub>D</sub>	69	Α
(Notes 1, 2, 3, 4)	Steady	T <sub>C</sub> = 100°C	1	39	
Power Dissipation	State	T <sub>C</sub> = 25°C	$P_{D}$	50	W
R <sub>θJC</sub> (Notes 1, 2, 3)		T <sub>C</sub> = 100°C		16	
Continuous Drain		T <sub>A</sub> = 25°C	I <sub>D</sub>	17	Α
Current R <sub>θJA</sub> (Notes 1, 3, 4)	Steady State	T <sub>A</sub> = 100°C		12	
Power Dissipation		T <sub>A</sub> = 25°C	$P_{D}$	3.1	W
R <sub>θJA</sub> (Notes 1, 3)		T <sub>A</sub> = 100°C	1	1.6	
Pulsed Drain Current	T <sub>A</sub> = 25	°C, t <sub>p</sub> = 10 μs	I <sub>DM</sub>	297	Α
Operating Junction and Range	T <sub>J</sub> , T <sub>stg</sub>	-55 to +175	°C		
Source Current (Body D	Is	42	Α		
Single Pulse Drain-to-S Energy (I <sub>L(pk)</sub> = 4.6 A)	E <sub>AS</sub>	103	mJ		
Lead Temperature for S (1/8" from case for 10 s)	TL	260	°C		

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

### THERMAL RESISTANCE MAXIMUM RATINGS (Note 1)

Parameter	Symbol	Value	Unit
Junction-to-Case - Steady State (Note 3)	$R_{\theta JC}$	3.0	°C/W
Junction-to-Ambient - Steady State (Note 3)	$R_{\theta JA}$	47.7	

- The entire application environment impacts the thermal resistance values shown, they are not constants and are only valid for the particular conditions noted.
- 2. Psi  $(\Psi)$  is used as required per JESD51-12 for packages in which substantially less than 100% of the heat flows to single case surface.
- 3. Surface-mounted on FR4 board using a 650 mm<sup>2</sup>, 2 oz. Cu pad.
- 4. Continuous DC current rating. Maximum current for pulses as long as 1 second is higher but is dependent on pulse duration and duty cycle.




# ON Semiconductor®

### www.onsemi.com

V <sub>(BR)DSS</sub>	R <sub>DS(on)</sub> MAX	I <sub>D</sub> MAX	
40 V	5.6 mΩ @ 10 V	69 A	


#### N-Channel





# WDFN8 (μ8FL) CASE 511AB

# MARKING DIAGRAM



05NC = Specific Device Code A = Assembly Location

Y = Year WW = Work Week • = Pb-Free Package

(Note: Microdot may be in either location)

### **ORDERING INFORMATION**

See detailed ordering, marking and shipping information in the package dimensions section on page 5 of this data sheet.

# **ELECTRICAL CHARACTERISTICS** ( $T_J = 25^{\circ}C$ unless otherwise noted)

Parameter	Symbol	Test Condition		Min	Тур	Max	Unit
OFF CHARACTERISTICS	•	•					•
Drain-to-Source Breakdown Voltage	V <sub>(BR)DSS</sub>	$V_{GS} = 0 \text{ V}, I_D = 250 \mu\text{A}$		40			V
Zero Gate Voltage Drain Current	I <sub>DSS</sub>	V <sub>GS</sub> = 0 V,	T <sub>J</sub> = 25°C			10	μΑ
		$V_{DS} = 40 \text{ V}$	T <sub>J</sub> = 125°C			250	
Gate-to-Source Leakage Current	I <sub>GSS</sub>	$V_{DS} = 0 \text{ V}, V_{G}$	<sub>S</sub> = 20 V			100	nA
ON CHARACTERISTICS (Note 5)							
Gate Threshold Voltage	V <sub>GS(TH)</sub>	$V_{GS} = V_{DS}, I_{D}$	= 40 μΑ	2.5		3.5	V
Drain-to-Source On Resistance	R <sub>DS(on)</sub>	V <sub>GS</sub> = 10 V, I <sub>E</sub>	<sub>0</sub> = 35 A		4.7	5.6	mΩ
Forward Transconductance	9FS	V <sub>DS</sub> = 15 V, I <sub>E</sub>	<sub>0</sub> = 35 A		53		S
CHARGES AND CAPACITANCES							
Input Capacitance	C <sub>iss</sub>				1000		pF
Output Capacitance	C <sub>oss</sub>	V <sub>GS</sub> = 0 V, f = V <sub>DS</sub> = 25	1.0 MHz, 5 V		530		1
Reverse Transfer Capacitance	C <sub>rss</sub>	108 =		22		1	
Threshold Gate Charge	Q <sub>G(TH)</sub>	V <sub>GS</sub> = 10 V, V <sub>DS</sub> = 20 V, I <sub>D</sub> = 35 A			3.2		nC
Gate-to-Source Charge	Q <sub>GS</sub>				5.7		1
Gate-to-Drain Charge	$Q_{GD}$				2.7		
Total Gate Charge	Q <sub>G(TOT)</sub>	$V_{GS} = 10 \text{ V}, V_{DS} = 20 \text{ V}, I_D = 35 \text{ A}$			16		nC
SWITCHING CHARACTERISTICS (No	te 6)						
Turn-On Delay Time	t <sub>d(on)</sub>				11		ns
Rise Time	t <sub>r</sub>	V <sub>GS</sub> = 10 V, V <sub>D</sub>	s = 20 V,		72		
Turn-Off Delay Time	t <sub>d(off)</sub>	I <sub>D</sub> = 35 A			24		
Fall Time	t <sub>f</sub>				8		
DRAIN-SOURCE DIODE CHARACTER	RISTICS						
Forward Diode Voltage	$V_{SD}$	V <sub>GS</sub> = 0 V,	T <sub>J</sub> = 25°C		0.87	1.2	V
		I <sub>S</sub> = 35 A	T <sub>J</sub> = 125°C		0.75		
Reverse Recovery Time	t <sub>RR</sub>	$V_{GS}$ = 0 V, $dI_S/dt$ = 100 A/ $\mu$ s, $I_S$ = 35 A			36		ns
Charge Time	t <sub>a</sub>				17		
Discharge Time	t <sub>b</sub>				18		
Reverse Recovery Charge	Q <sub>RR</sub>				16		nC

<sup>5.</sup> Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2%.
6. Switching characteristics are independent of operating junction temperatures.

### **TYPICAL CHARACTERISTICS**




Figure 1. On-Region Characteristics




Figure 2. Transfer Characteristics




Figure 3. On-Resistance vs. Gate-to-Source Voltage




Figure 4. On-Resistance vs. Drain Current and Gate Voltage




Figure 5. On–Resistance Variation with Temperature




Figure 6. Drain-to-Source Leakage Current vs. Voltage

### **TYPICAL CHARACTERISTICS**




Figure 7. Capacitance Variation




Figure 8. Gate-to-Source Voltage vs. Total Charge




Figure 9. Resistive Switching Time Variation vs. Gate Resistance




Figure 10. Diode Forward Voltage vs. Current




Figure 11. Maximum Rated Forward Biased Safe Operating Area




Figure 12. I<sub>PEAK</sub> vs. Time in Avalanche

### **TYPICAL CHARACTERISTICS**

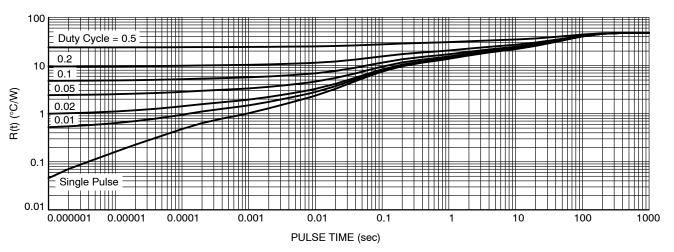


Figure 13. Thermal Characteristics

## **DEVICE ORDERING INFORMATION**

Device	Marking	Package	Shipping <sup>†</sup>
NTTFS005N04CTAG	05NC	WDFN8 (Pb-Free)	1500 / Tape & Reel


<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.





WDFN8 3.3x3.3, 0.65P CASE 511AB ISSUE D


**DATE 23 APR 2012** 

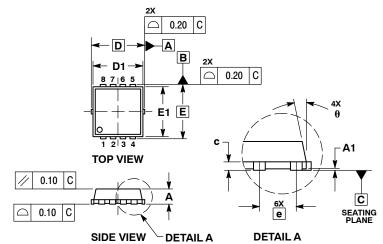

#### NOTES:

- DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
  CONTROLLING DIMENSION: MILLIMETERS.
  DIMENSION D1 AND E1 DO NOT INCLUDE MOLD FLASH
  PROTRUSIONS OR GATE BURRS.

	MILLIMETERS				INCHES		
DIM	MIN	NOM	MAX	MIN	NOM	MAX	
Α	0.70	0.75	0.80	0.028	0.030	0.031	
A1	0.00		0.05	0.000		0.002	
b	0.23	0.30	0.40	0.009	0.012	0.016	
С	0.15	0.20	0.25	0.006	0.008	0.010	
D	3.30 BSC			0	0.130 BSC		
D1	2.95	3.05	3.15	0.116	0.120	0.124	
D2	1.98	2.11	2.24	0.078	0.083	0.088	
E	3.30 BSC			0.130 BSC			
E1	2.95	3.05	3.15	0.116	0.120	0.124	
E2	1.47	1.60	1.73	0.058	0.063	0.068	
E3	0.23	0.30	0.40	0.009	0.012	0.016	
е		0.65 BSC			0.026 BSC		
G	0.30	0.41	0.51	0.012	0.016	0.020	
K	0.65	0.80	0.95	0.026	0.032	0.037	
L	0.30	0.43	0.56	0.012	0.017	0.022	
L1	0.06	0.13	0.20	0.002	0.005	0.008	
М	1.40	1.50	1.60	0.055	0.059	0.063	
θ	0 °		12 °	0 °		12 °	




# **GENERIC MARKING DIAGRAM\***



XXXXX = Specific Device Code = Assembly Location

= Year WW = Work Week = Pb-Free Package



DIMENSION: MILLIMETERS

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

DOCUMENT NUMBER:	98AON30561E	Electronic versions are uncontrolled except when accessed directly from the Document Reposi Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.			
DESCRIPTION:	WDFN8 3.3X3.3, 0.65P		PAGE 1 OF 1		

onsemi and ONSEMI are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. **onsemi** does not convey any license under its patent rights nor the rights of others.

<sup>\*</sup>This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "■", may or may not be present. Some products may not follow the Generic Marking.

onsemi, Onsemi, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at <a href="www.onsemi.com/site/pdf/Patent-Marking.pdf">www.onsemi.com/site/pdf/Patent-Marking.pdf</a>. Onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA class 3 medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase

#### ADDITIONAL INFORMATION

**TECHNICAL PUBLICATIONS:** 

 $\textbf{Technical Library:} \ \underline{www.onsemi.com/design/resources/technical-documentation}$ 

onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at

www.onsemi.com/support/sales