

# Automotive 750 V, 500 A Dual Side Cooling Half-Bridge Power Module

## VE-Trac™ Dual NVG500A75L4DSF2

### Product Description

The NVG500A75L4DSF2 is part of VE-Trac™ Dual family of power modules with dual side cooling and compact footprints for Hybrid (HEV) and Electric Vehicle (EV) traction inverter application.

The module consists of two narrow mesa Field Stop (FS4) IGBTs in a half-bridge configuration. The chipset utilizes the new narrow mesa IGBT technology in providing high current density and robust short circuit protection with higher blocking voltage to deliver outstanding performance in EV traction applications.


Liquid cooling heatsink reference design, loss models and CAD models are available to support customers in inverter designs.

### Features

- Dual-Side Cooling
- Integrated Chip Level Temperature and Current Sensor
- $T_{vj\ max} = 175^{\circ}C$  for Continuous Operation
- Low Stray Inductance
- Low Conduction and Switching Losses
- Automotive Grade
- 4.2 kV Isolated DBC Substrate
- AEC Qualified and PPAP Capable
- This Device is Pb-Free and is RoHS Compliant


### Typical Applications

- Hybrid and Electric Vehicle Traction Inverter
- High Power DC-DC Boost Converter




AHPM13-CGA MODULE  
 CASE MODHR

### MARKING DIAGRAM

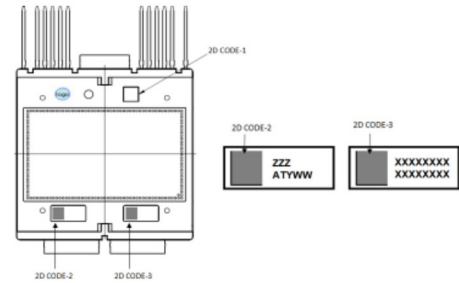

ZZZ = Assembly Lot Code  
 AT = Assembly & Test Location  
 Y = Year  
 WW = Work Week  
 XXXX = Specific Device Code

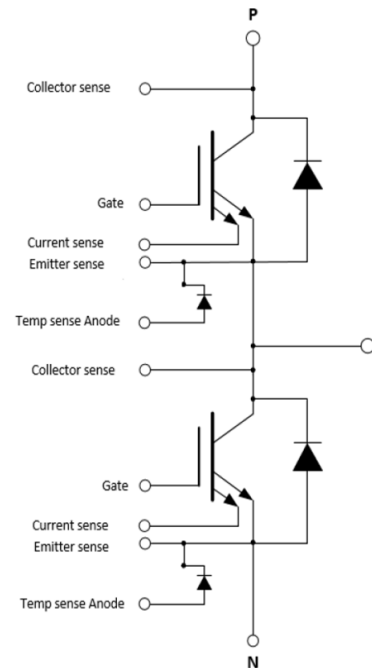

### ORDERING INFORMATION

See detailed ordering and shipping information on page 10 of this data sheet.

# VE-Trac™ Dual NVG500A75L4DSF2

## PIN DESCRIPTION

Pin #	Pin	Pin Function Description	Pin Arrangement
1	N	Low Side Emitter	
2	P	High Side Collector	
3	H/S COLLECTOR SENSE	High Side Collector Sense	
4	H/S CURRENT SENSE	High Side Current Sense	
5	H/S GATE	High Side Gate	
6	H/S EMITTER SENSE	High Side Emitter Sense	
7	H/S TEMP SENSE (ANODE)	High Side Temp sense Diode Anode	
8	~	Phase Output	
9	L/S CURRENT SENSE	Low Side Current Sense	
10	L/S EMITTER SENSE	Low Side Emitter Sense	
11	L/S GATE	Low Side Gate	
12	L/S TEMP SENSE (ANODE)	Low Side Temp sense Diode Anode	
13	L/S COLLECTOR SENSE	Low Side Collector Sense	

## DBC Substrate

Al<sub>2</sub>O<sub>3</sub> isolated substrate, basic isolation, and copper on both sides.

## Lead Frame

Copper with Tin electro-plating.

## Flammability Information

All materials present in the power module meet UL flammability rating class 94V-0.

## MODULE CHARACTERISTICS

Symbol	Parameter	Rating	Unit		
T <sub>vj</sub>	Continuous Operating Junction Temperature Range	-40 to 175	°C		
T <sub>STG</sub>	Storage Temperature range	-40 to 125	°C		
V <sub>ISO</sub>	Isolation Voltage, AC, f = 50 Hz, t = 1 s	4200	V		
CTI	Comparative Tracking Index	>600	-		
		<b>Min</b>	<b>Typ</b>	<b>Max</b>	
Creepage	Pin/Terminal to Pin/Terminal (closest location)	5.0	-	-	mm
Clearance	Pin/Terminal to Pin/Terminal (closest location)	2.9	-	-	mm
L <sub>sCE</sub>	Stray Inductance	-	8	-	nH
R <sub>CC'+EE'</sub>	Module Lead Resistance, Terminals - Chip	-	0.15	-	mΩ
G	Module Weight	-	75	-	g
M	M4 Screws for Module Terminals	-	-	2.2	Nm

## VE-Trac™ Dual NVG500A75L4DSF2

### ABSOLUTE MAXIMUM RATINGS (T<sub>VJ</sub> = 25°C, unless otherwise specified)

Symbol	Parameter	Rating	Unit
--------	-----------	--------	------

#### IGBT

V <sub>CES</sub>	Collector to Emitter Voltage	750	V
V <sub>GES</sub>	Gate to Emitter Voltage	±20	V
I <sub>CN</sub>	Implemented Collector Current	500	A
I <sub>C nom</sub>	Continuous DC Collector Current, T <sub>vjmax</sub> = 175°C, T <sub>F</sub> = 65°C, Ref. Heatsink	410	A
I <sub>CRM</sub>	Pulsed Collector Current @ V <sub>GE</sub> = 15 V, t <sub>p</sub> = 1 ms	1000	A

#### DIODE

V <sub>RRM</sub>	Repetitive Peak Reverse Voltage	750	V
I <sub>FN</sub>	Implemented Forward Current	500	A
I <sub>F</sub>	Continuous Forward Current, T <sub>vjmax</sub> = 175°C, T <sub>F</sub> = 65°C, Ref. Heatsink	350	A
I <sub>FRM</sub>	Repetitive Peak Forward Current, t <sub>p</sub> = 1 ms	1000	A
I <sup>2</sup> t value	V <sub>R</sub> = 0 V, t <sub>p</sub> = 10 ms, T <sub>VJ</sub> = 150°C T <sub>VJ</sub> = 175°C	10000 9000	A <sup>2</sup> s

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

### THERMAL CHARACTERISTICS

Symbol	Parameter	Min	Typ	Max	Unit
IGBT.R <sub>th,J-C</sub>	Effective R <sub>th</sub> , Junction to Case	–	0.06	0.08	°C/W
IGBT.R <sub>th,J-F</sub>	Effective R <sub>th</sub> , Junction to Fluid, λ <sub>TIM</sub> = 6 W/m-K, F = 660 N 10 L/min, 65°C, 50/50 EGW, Ref. Heatsink	–	0.164	–	°C/W
Diode.R <sub>th,J-C</sub>	Effective R <sub>th</sub> , Junction to Case	–	0.11	0.14	°C/W
Diode.R <sub>th,J-F</sub>	Effective R <sub>th</sub> , Junction to Fluid, λ <sub>TIM</sub> = 6 W/m-K, F = 660 N 10 L/min, 65°C, 50/50 EGW, Ref. Heatsink	–	0.224	–	°C/W

## VE-Trac™ Dual NVG500A75L4DSF2

### CHARACTERISTICS OF IGBT ( $T_{vj} = 25^{\circ}\text{C}$ , unless otherwise specified)

Parameters		Conditions	Min	Typ	Max	unit	
$V_{CESAT}$	Collector to Emitter Saturation Voltage	$V_{GE} = 15\text{ V}, I_C = 400\text{ A},$	$T_{vj} = 25^{\circ}\text{C}$	–	1.32	1.45	V
			$T_{vj} = 150^{\circ}\text{C}$	–	1.37	–	
			$T_{vj} = 175^{\circ}\text{C}$	–	1.39	–	
		$V_{GE} = 15\text{ V}, I_C = 500\text{ A},$	$T_{vj} = 25^{\circ}\text{C}$	–	1.39	–	
			$T_{vj} = 150^{\circ}\text{C}$	–	1.51	–	
			$T_{vj} = 175^{\circ}\text{C}$	–	1.55	–	
$I_{CES}$	Collector to Emitter Leakage Current	$V_{GE} = 0, V_{CE} = 750\text{ V}$	$T_{vj} = 25^{\circ}\text{C}$	–	–	1	mA
			$T_{vj} = 175^{\circ}\text{C}$	–	8	–	
$I_{GES}$	Gate – Emitter Leakage Current	$V_{CE} = 0, V_{GE} = \pm 20\text{ V}$	–	–	$\pm 400$	nA	
$V_{th}$	Threshold Voltage	$V_{CE} = V_{GE}, I_C = 500\text{ mA}$	4.5	5.6	6.5	V	
$Q_G$	Total Gate Charge	$V_{GE} = -8\text{ to }15\text{ V}, V_{CE} = 400\text{ V},$ $I_C = 400\text{ A}$	–	0.96	–	$\mu\text{C}$	
$R_{Gint}$	Internal Gate Resistance		–	2	–	$\Omega$	
$C_{ies}$	Input Capacitance	$V_{CE} = 30\text{ V}, V_{GE} = 0\text{ V}, f = 1\text{ MHz}$	–	36	–	nF	
$C_{oes}$	Output Capacitance	$V_{CE} = 30\text{ V}, V_{GE} = 0\text{ V}, f = 1\text{ MHz}$	–	0.7	–	nF	
$C_{res}$	Reverse Transfer Capacitance	$V_{CE} = 30\text{ V}, V_{GE} = 0\text{ V}, f = 1\text{ MHz}$	–	0.09	–	nF	
$T_{d.on}$	Turn On Delay, Inductive Load	$I_C = 400\text{ A}, V_{CE} = 400\text{ V}$ $V_{GE} = +15/-8\text{ V}$ $R_{g.on} = 3.9\ \Omega$	$T_{vj} = 25^{\circ}\text{C}$	–	168	–	ns
			$T_{vj} = 150^{\circ}\text{C}$	–	192	–	
			$T_{vj} = 175^{\circ}\text{C}$	–	197	–	
$T_r$	Rise Time, Inductive Load	$I_C = 400\text{ A}, V_{CE} = 400\text{ V}$ $V_{GE} = +15/-8\text{ V}$ $R_{g.on} = 3.9\ \Omega$	$T_{vj} = 25^{\circ}\text{C}$	–	67	–	ns
			$T_{vj} = 150^{\circ}\text{C}$	–	82	–	
			$T_{vj} = 175^{\circ}\text{C}$	–	86	–	
$T_{d.off}$	Turn Off Delay, Inductive Load	$I_C = 400\text{ A}, V_{CE} = 400\text{ V}$ $V_{GE} = +15/-8\text{ V}$ $R_{g.off} = 15\ \Omega$	$T_{vj} = 25^{\circ}\text{C}$	–	801	–	ns
			$T_{vj} = 150^{\circ}\text{C}$	–	872	–	
			$T_{vj} = 175^{\circ}\text{C}$	–	884	–	
$T_f$	Fall Time, Inductive Load	$I_C = 400\text{ A}, V_{CE} = 400\text{ V}$ $V_{GE} = +15/-8\text{ V}$ $R_{g.off} = 15\ \Omega$	$T_{vj} = 25^{\circ}\text{C}$	–	112	–	ns
			$T_{vj} = 150^{\circ}\text{C}$	–	165	–	
			$T_{vj} = 175^{\circ}\text{C}$	–	196	–	
$E_{ON}$	Turn-On Switching Loss (Including Diode Reverse Recovery Loss)	$I_C = 400\text{ A}, V_{CE} = 400\text{ V}$ $V_{GE} = +15/-8\text{ V}$ $R_{g.on} = 3.9\ \Omega$ $L_s = 25\text{ nH}$ $di/dt (T_{vj} = 25^{\circ}\text{C}) = 5.04\text{ A/ns}$ $di/dt (T_{vj} = 175^{\circ}\text{C}) = 4.15\text{ A/ns}$	$T_{vj} = 25^{\circ}\text{C}$	–	10.49	–	mJ
			$T_{vj} = 150^{\circ}\text{C}$	–	16.20	–	
			$T_{vj} = 175^{\circ}\text{C}$	–	17.84	–	
$E_{OFF}$	Turn-Off Switching Loss	$I_C = 400\text{ A}, V_{CE} = 400\text{ V}$ $V_{GE} = +15/-8\text{ V}$ $R_{g.off} = 15\ \Omega$ $L_s = 25\text{ nH}$ $dv/dt (T_{vj}=25^{\circ}\text{C}) = 3.0\text{ V/ns}$ $dv/dt (T_{vj}=175^{\circ}\text{C}) = 2.24\text{ V/ns}$	$T_{vj} = 25^{\circ}\text{C}$	–	14.52	–	mJ
			$T_{vj} = 150^{\circ}\text{C}$	–	23.31	–	
			$T_{vj} = 175^{\circ}\text{C}$	–	23.88	–	
$E_{sc}$	Minimum Short Circuit Energy Withstand	$V_{GE} \leq 15\text{ V}, V_{CE} = 400\text{ V}$	$T_{vj} = 25^{\circ}\text{C}$	–	3.0	–	J
			$T_{vj} = 175^{\circ}\text{C}$	3.0	–	–	

## VE-Trac™ Dual NVG500A75L4DSF2

### CHARACTERISTICS OF INVERSE DIODE ( $T_{vj} = 25^{\circ}\text{C}$ , unless otherwise specified)

Parameters		Conditions	Min	Typ	Max	unit	
$V_F$	Diode Forward Voltage	$V_{GE} = 0\text{ V}, I_C = 400\text{ A},$	$T_{vj} = 25^{\circ}\text{C}$	–	1.47	1.62	V
			$T_{vj} = 150^{\circ}\text{C}$	–	1.44	–	
			$T_{vj} = 175^{\circ}\text{C}$	–	1.42	–	
		$V_{GE} = 0\text{ V}, I_C = 500\text{ A},$	$T_{vj} = 25^{\circ}\text{C}$	–	1.55	–	
			$T_{vj} = 150^{\circ}\text{C}$	–	1.54	–	
			$T_{vj} = 175^{\circ}\text{C}$	–	1.53	–	
$E_{rr}$	Reverse Recovery Energy	$V_R = 400\text{ V}, I_F = 400\text{ A},$ $R_{GON} = 3.9\ \Omega,$ $-di/dt = 3.61\text{ A/ns (175}^{\circ}\text{C)}$ $V_{GE} = -8\text{ V}$	$T_{vj} = 25^{\circ}\text{C}$	–	1.16	–	mJ
			$T_{vj} = 150^{\circ}\text{C}$	–	4.12	–	
			$T_{vj} = 175^{\circ}\text{C}$	–	4.81	–	
				–	–	–	
$Q_{RR}$	Recovered Charge	$V_R = 400\text{ V}, I_F = 400\text{ A},$ $R_{GON} = 3.9\ \Omega,$ $-di/dt = 3.61\text{ A/ns (175}^{\circ}\text{C)}$ $V_{GE} = -8\text{ V}$	$T_{vj} = 25^{\circ}\text{C}$	–	10.69	–	$\mu\text{C}$
			$T_{vj} = 150^{\circ}\text{C}$	–	23.14	–	
			$T_{vj} = 150^{\circ}\text{C}$	–	25.80	–	
				–	–	–	
$I_{rr}$	Peak Reverse Recovery Current	$V_R = 400\text{ V}, I_F = 400\text{ A},$ $R_{GON} = 3.9\ \Omega,$ $-di/dt = 3.61\text{ A/ns (175}^{\circ}\text{C)}$ $V_{GE} = -8\text{ V}$	$T_{vj} = 25^{\circ}\text{C}$	–	219	–	A
			$T_{vj} = 150^{\circ}\text{C}$	–	272	–	
			$T_{vj} = 175^{\circ}\text{C}$	–	276	–	
				–	–	–	

### SENSOR CHARACTERISTICS ( $T_{vj} = 25^{\circ}\text{C}$ , unless otherwise specified)

Parameters		Conditions	Min	Typ	Max	unit	
$T_{sense}$	Temperature Sense	$I_F = 200\ \mu\text{A},$	$T_{vj} = 25^{\circ}\text{C}$	–	2.165	–	V
			$T_{vj} = 150^{\circ}\text{C}$	–	1.308	–	
			$T_{vj} = 175^{\circ}\text{C}$	–	1.130	–	
$I_{sense}$	Current Sense	$R_{shunt} = 0.56\ \Omega,$	$I_C = 1000\text{ A}$	–	53	–	mV
			$I_C = 500\text{ A}$	–	30	–	
			$I_C = 100\text{ A}$	–	10	–	

# VE-Trac™ Dual NVG500A75L4DSF2

## TYPICAL CHARACTERISTICS

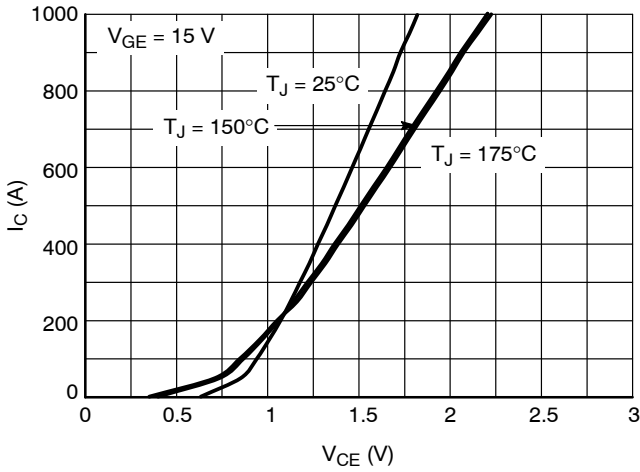


Figure 1. IGBT Output Characteristic

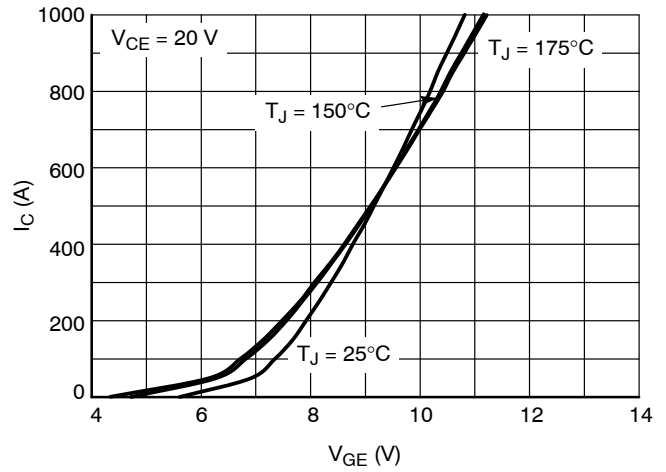


Figure 2. IGBT Transfer Characteristic

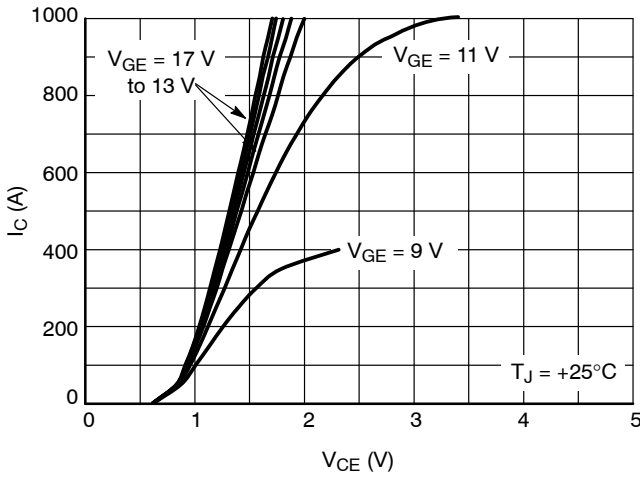


Figure 3. IGBT Output Characteristic, +25°C

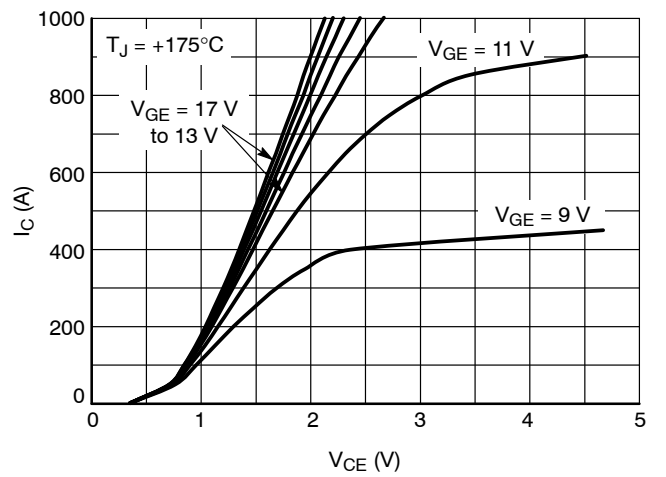


Figure 4. IGBT Output Characteristic, +175°C

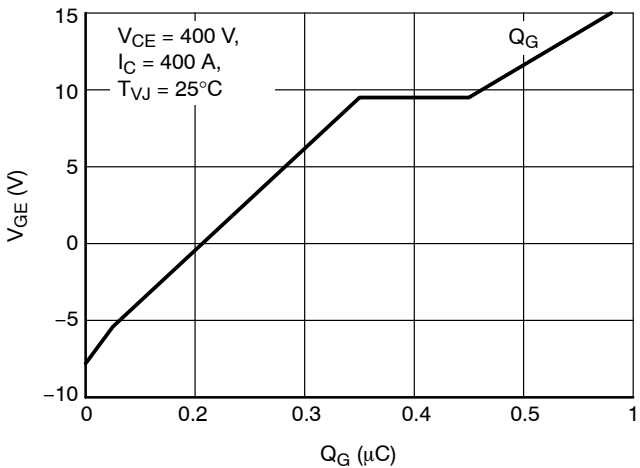


Figure 5. Gate Charge Characteristics

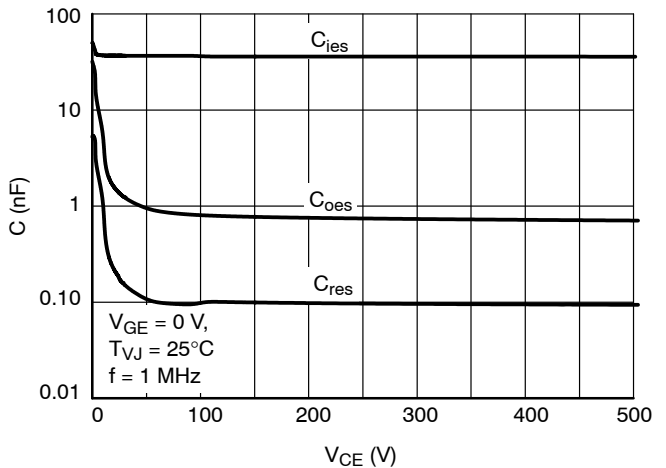


Figure 6. Capacitance Characteristics

# VE-Trac™ Dual NVG500A75L4DSF2

## TYPICAL CHARACTERISTICS

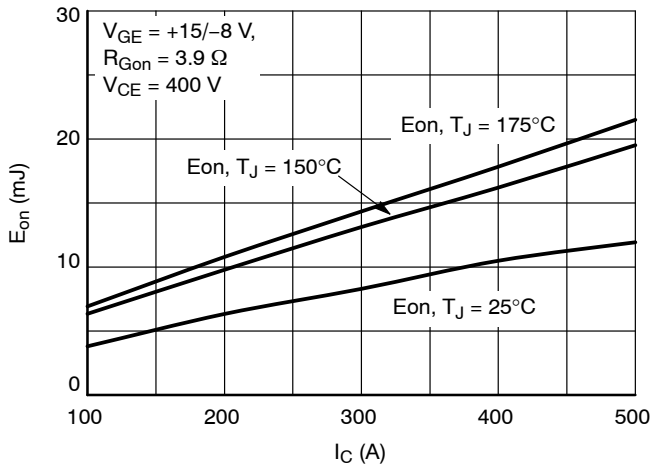


Figure 7.  $E_{on}$  vs.  $I_C$

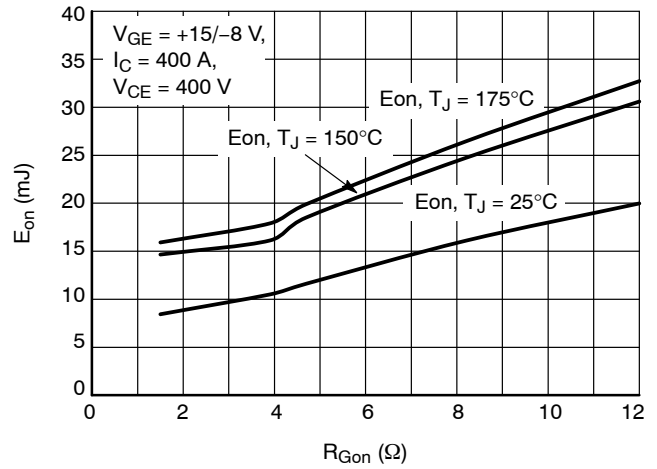


Figure 8.  $E_{on}$  vs.  $R_{Gon}$

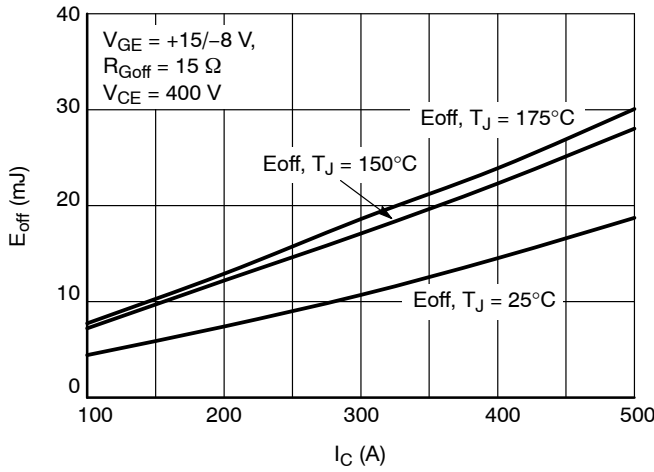


Figure 9.  $E_{off}$  vs.  $I_C$

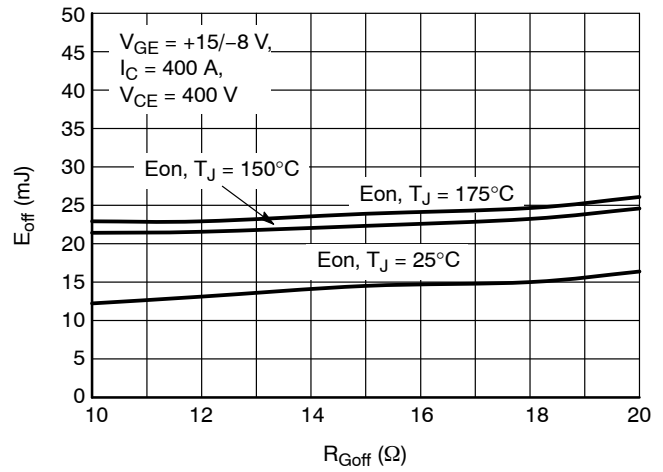


Figure 10.  $E_{off}$  vs.  $R_{Goff}$

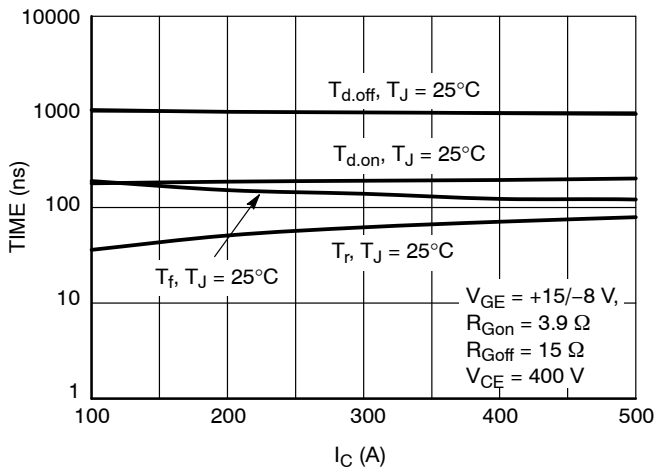


Figure 11. IGBT Switching Times vs.  $I_C$ ,  $T_{J} = 25^\circ\text{C}$

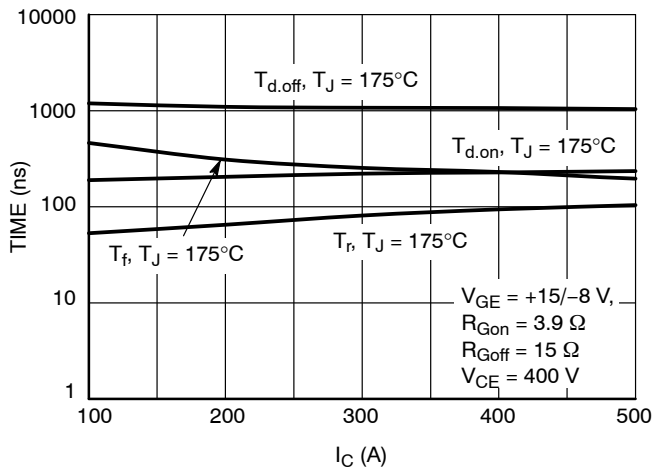


Figure 12. IGBT Switching Times vs.  $I_C$ ,  $T_{J} = 175^\circ\text{C}$

# VE-Trac™ Dual NVG500A75L4DSF2

## TYPICAL CHARACTERISTICS

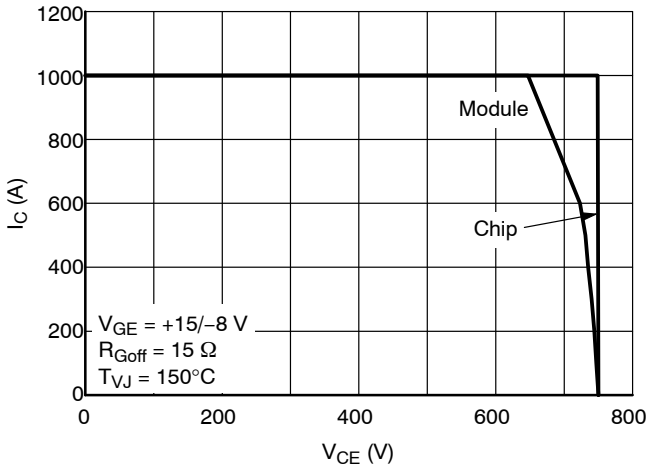


Figure 13. Reverse Bias Safe Operating Area

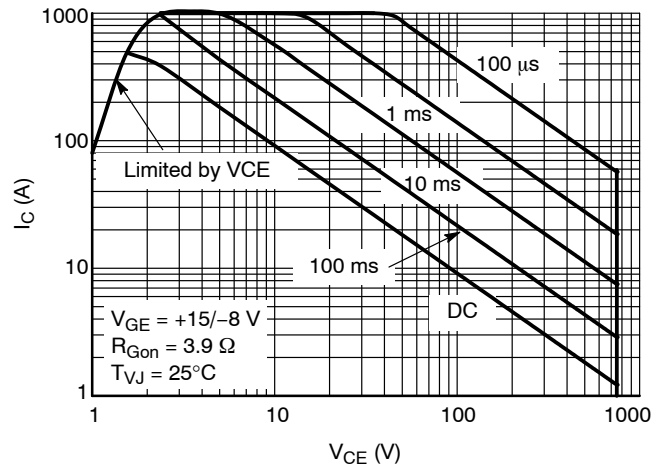


Figure 14. Forward Bias Safe Operating Area

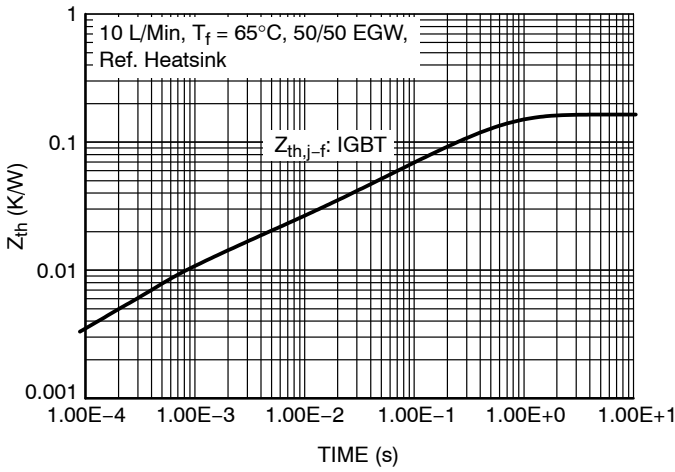


Figure 15. IGBT Transient Thermal Impedance

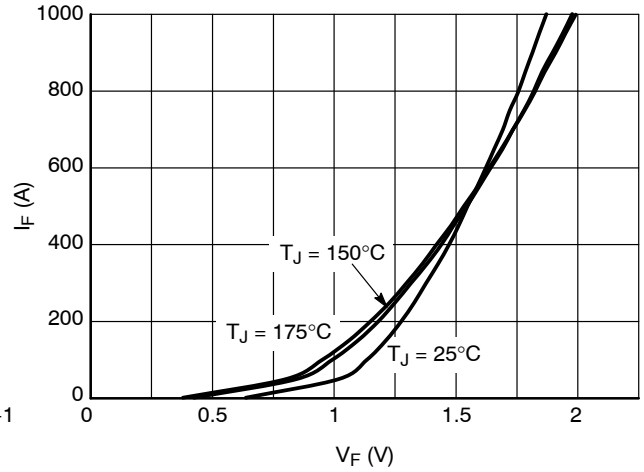


Figure 16. Diode Forward Characteristic

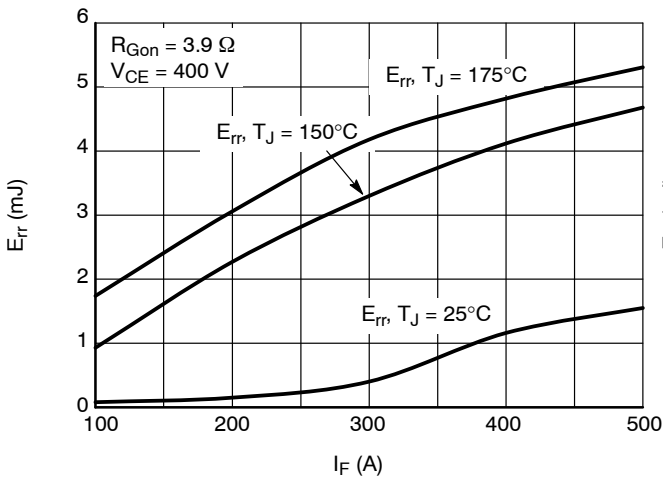


Figure 17. Diode Switching Losses vs.  $I_F$

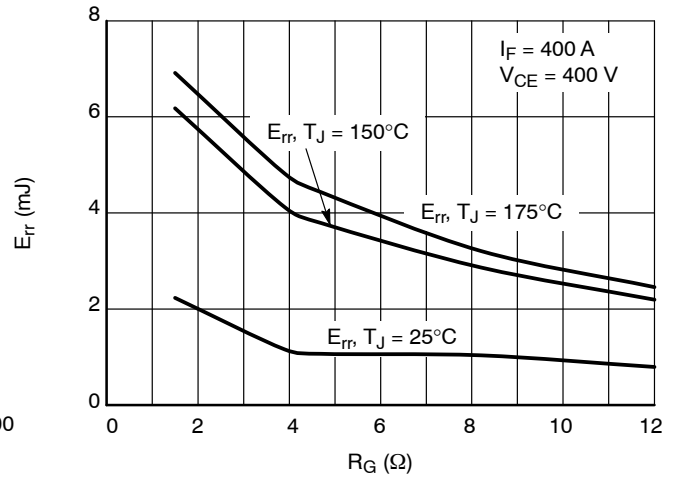


Figure 18. Diode Switching Losses vs.  $R_{Gon}$



TYPICAL CHARACTERISTICS

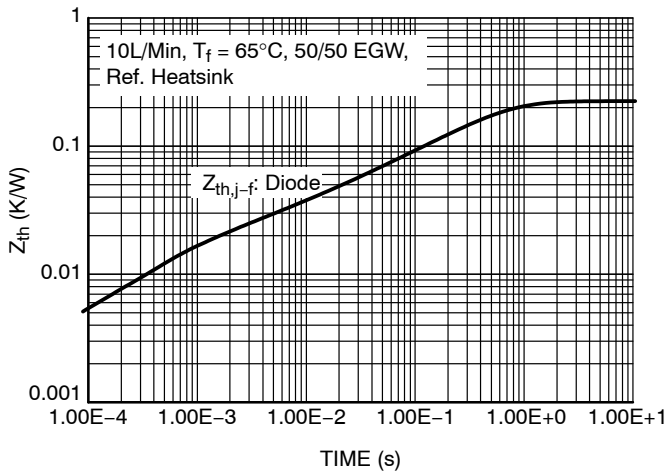


Figure 19. Diode Transient Thermal Impedance

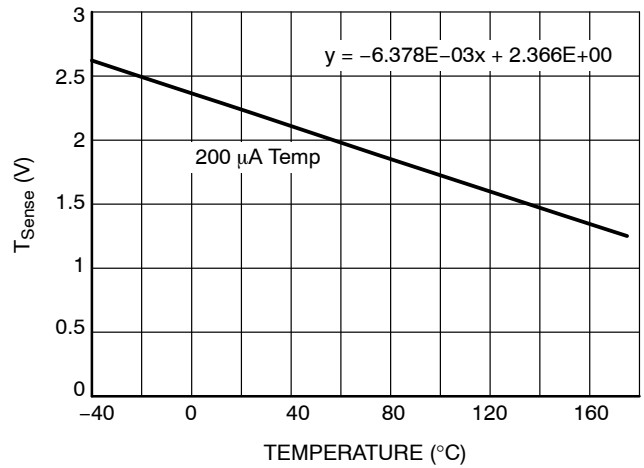


Figure 20. Temperature Sensor Characteristic

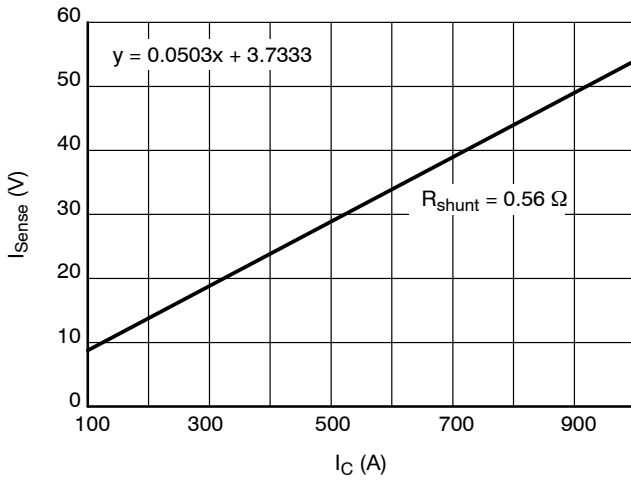


Figure 21. Current Sensor Characteristic

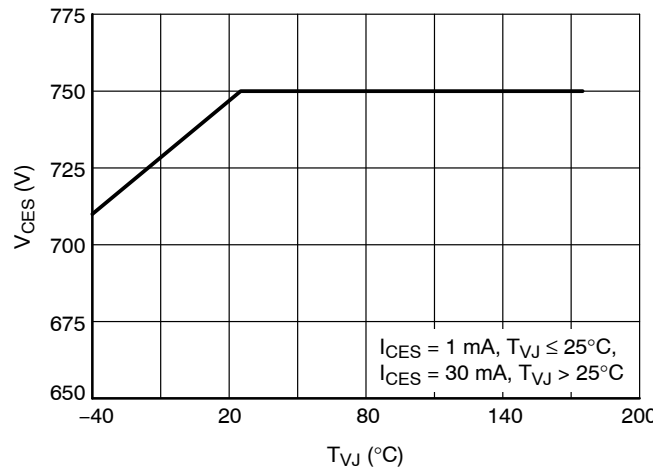


Figure 22. Maximum Allowed V<sub>CE</sub>

General Note: These are preliminary values measured from a small number of DV units. Values will be updated based on higher quantity of PV measurements.

# VE-Trac™ Dual NVG500A75L4DSF2


## ORDERING INFORMATION

Part Number	Package	Shipping
NVG500A75L4DSF2	AHPM13-CGA Module Case MODHR (Pb-Free)	18 Units / 3x Tube

VE-Trac is a trademark of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries.

# MECHANICAL CASE OUTLINE

## PACKAGE DIMENSIONS




### AHPM13-CGA MODULE







#### CASE MODHR

#### ISSUE B

DATE 19 MAY 2023

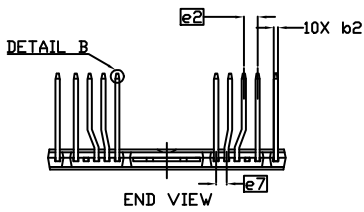

- NOTES:
1. DIMENSIONING AND TOLERANCING PER. ASME Y14.5M, 2009.
  2. CONTROLLING DIMENSION: MILLIMETERS
  3. DIMENSIONS D & E DO NOT INCLUDE MOLD PROTRUSIONS
  4. DIMENSIONS b,b1,b2 DO NOT INCLUDE DAMBAR REMAIN.
  5. MARKING AREA.
  6. ALTERNATE PACKAGE DIMENSIONING OPTION AVAILABLE IN DDC# 08ADN34464H

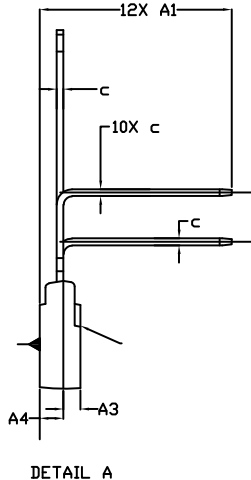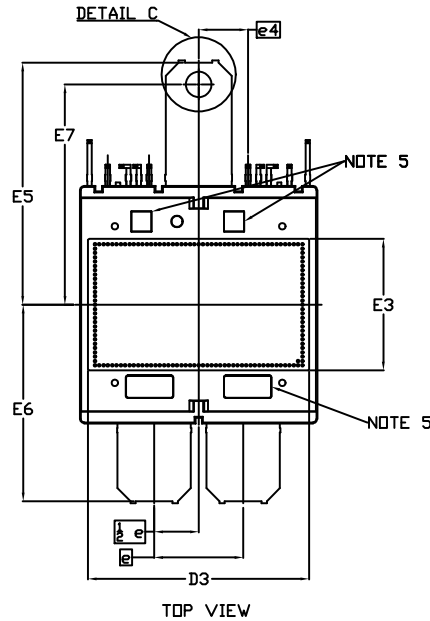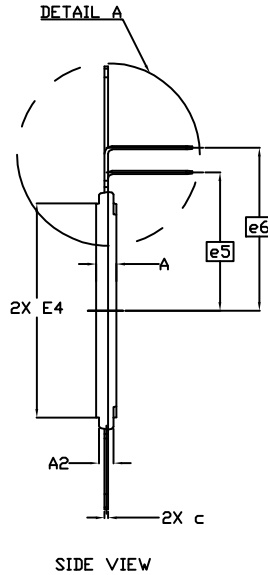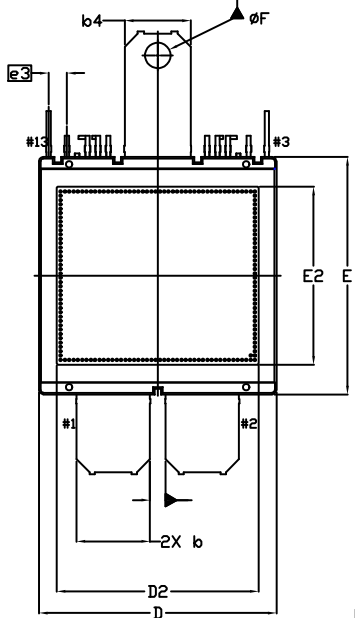

DIM	MILLIMETERS		
	MIN.	NOM.	MAX.
A	4.65	4.70	4.75
A1	21.55	22.25	22.95
A2	3.20	3.40	3.60
A3	1.95 REF		
A4	2.75 REF		
b	16.70	17.00	17.30
b2	0.90	1.00	1.10
b3	0.50 REF		
b4	15.20	15.30	15.40
c	0.70	0.80	0.90
D	54.80	55.00	55.20
D2	45.80	46.80	47.80
D3	50.50	51.20	51.90
E	54.80	55.00	55.20
E2	40.20	41.20	42.20

DIM	MILLIMETERS		
	MIN.	NOM.	MAX.
E3	29.80	30.50	31.20
E4	49.40	49.60	49.80
E5	55.65	56.00	56.35
E6	45.15	45.50	45.85
E7	50.75	51.00	51.25
e	20.60 BSC		
e2	3.20 BSC		
e3	4.20 BSC		
e4	11.45 BSC		
e5	32.00 BSC		
e6	37.70 BSC		
e7	2.40 BSC		
F	5.90	6.00	6.10
L	0.50 REF		
M*	10* REF		


<b>DOCUMENT NUMBER:</b>	<b>98AON31644H</b>	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.
<b>DESCRIPTION:</b>	<b>AHPM13-CGA MODULE</b>	<b>PAGE 1 OF 2</b>

onsemi and ONSEMI are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

**AHPM13-CGA MODULE  
CASE MODHR  
ISSUE B**

DATE 19 MAY 2023

**GENERIC  
MARKING DIAGRAM\***

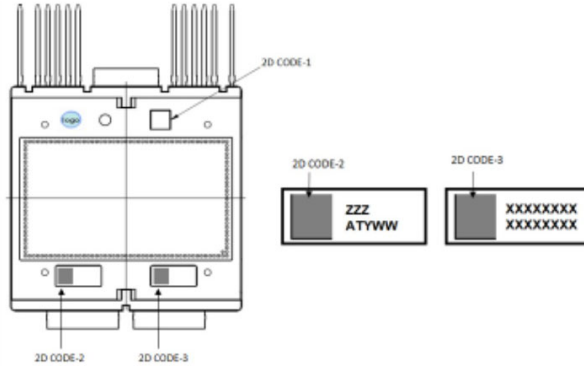

ZZZ = Assembly Lot Code  
 AT = Assembly & Test Location  
 Y = Year  
 WW = Work Week  
 XXXX = Specific Device Code

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "▪", may or may not be present. Some products may not follow the Generic Marking.

<b>DOCUMENT NUMBER:</b>	<b>98AON31644H</b>	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.
<b>DESCRIPTION:</b>	<b>AHPM13-CGA MODULE</b>	<b>PAGE 2 OF 2</b>

**onsemi** and **ONSEMI** are trademarks of Semiconductor Components Industries, LLC dba **onsemi** or its subsidiaries in the United States and/or other countries. **onsemi** reserves the right to make changes without further notice to any products herein. **onsemi** makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. **onsemi** does not convey any license under its patent rights nor the rights of others.

**onsemi**, **Onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## ADDITIONAL INFORMATION

### TECHNICAL PUBLICATIONS:

Technical Library: [www.onsemi.com/design/resources/technical-documentation](http://www.onsemi.com/design/resources/technical-documentation)  
onsemi Website: [www.onsemi.com](http://www.onsemi.com)

### ONLINE SUPPORT: [www.onsemi.com/support](http://www.onsemi.com/support)

For additional information, please contact your local Sales Representative at [www.onsemi.com/support/sales](http://www.onsemi.com/support/sales)

